

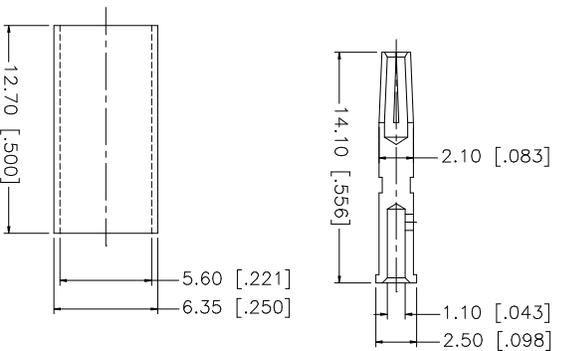
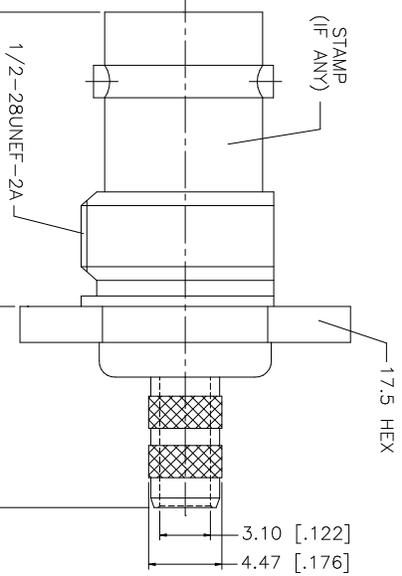
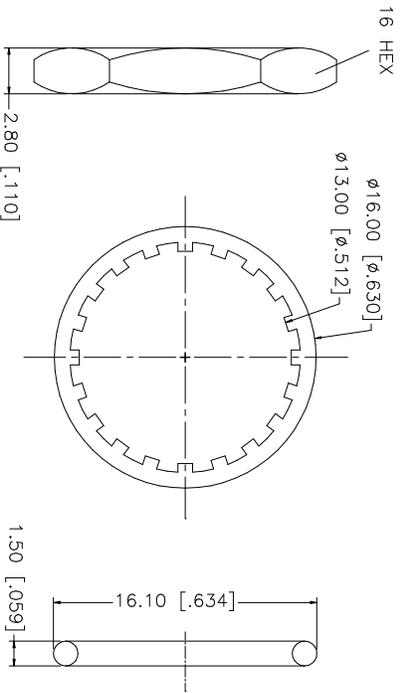


| REV. | DATE | DESCRIPTION |
|------|----------|-----------------|
| NC | 09/18/05 | INITIAL RELEASE |

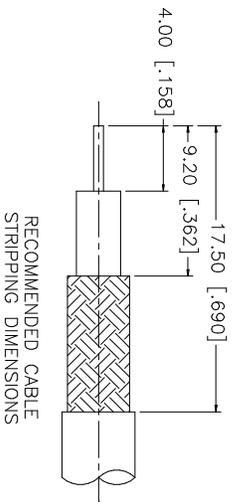

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

| QTY | DESCRIPTION | MATERIAL | FINISH | FINISH | QTY | DO NOT SCALE DRAWING |
|-----|-----------------|--------------|---------|--------|-----|----------------------|
| 1 | 16 HEX | COPPER | NICKEL | | | |
| 1 | CRIMPED FERRULE | BRASS | NICKEL | | | |
| 1 | HEX NUT | BRASS | NICKEL | | | |
| 1 | LOCK WASHER | BRASS | NICKEL | | | |
| 1 | GASKET | RUBBER | RED | | | |
| 1 | CONTACT PIN | PHOS. BRONZE | GOLD | | | |
| 1 | INSULATOR | TEFLON | NATURAL | | | |
| 1 | BODY/HOUSING | BRASS | NICKEL | | | |

| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: |
|--|--|---|
| 0.5 - 8mm ± 0.20mm | 0.5 - 8mm ± 0.20mm | .020 - .315 = ± 0.007" |
| 8 - 30mm ± 0.40mm | 8 - 30mm ± 0.40mm | .315 - 1.180 = ± 0.015" |
| 30 - 120mm ± 0.50mm | 30 - 120mm ± 0.50mm | 1.180 - 4.724 = ± 0.020" |

| APPROVALS | DATE |
|-----------|----------|
| G.R.S. | 09/18/05 |

| CAD FILE | DWG. NO. | REV. | NC | SIZE | SCALE |
|----------------------|---------------|------|----|------|-------|
| C:/112/112505-10.DWG | 112505-10.DWG | | | A | NA |

| PART DESCRIPTION | PART NO. |
|--|-----------|
| BNC BULKHEAD CRIMP JACK (FOR RG-55/U, 142A/U, 223/U, 400/U CABLE) | 112505-10 |