

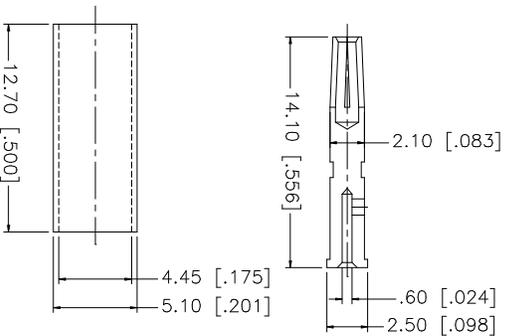
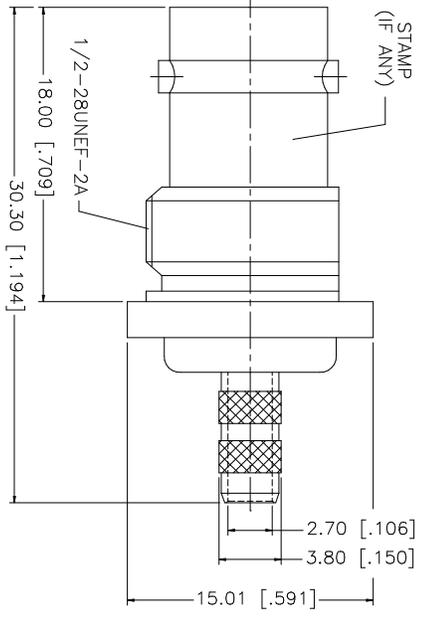
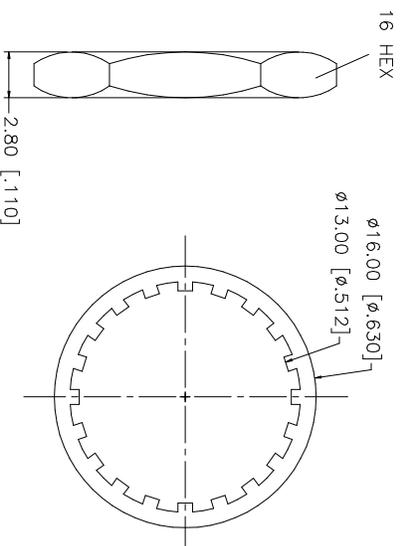


REV.	DATE	DESCRIPTION
NC	05/03/04	INITIAL RELEASE

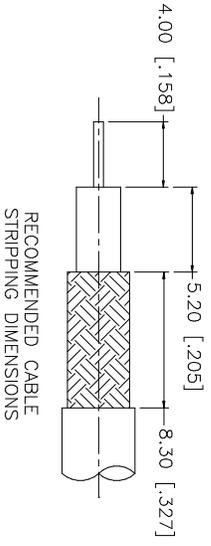

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:	APPROVALS	DATE	PART DESCRIPTION							
8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:			Amphenol Connex BNC BULKHEAD CRIMP JACK (FOR BELDEN 8218 CABLE) 112568-10							
7					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:										
6	FERRULE	COPPER	NICKEL	1	0.5 - 8mm ± 0.20mm	DRAWN	G.R.S.		05/03/04						
5	HEX NUT	BRASS	NICKEL	1	8 - 30mm ± 0.40mm	CHECKED									
4	LOCK WASHER	BRASS	NICKEL	1	30 - 120mm ± 0.50mm	ISSUED									
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS FOR INCHES ARE:	SHEET	1 OF 1								
2	INSULATOR	TEFLON	NATURAL	1	.020 - .315 = ± 0.007"										
1	BODY/HOUSING	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"										
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/112/112568-10.DWG	DWG. NO.	112568-10.DWG	REV.	NC	SIZE	A	SCALE	NA