






REV.	DATE	ECR NO.	DESCRIPTION
A	06/03/99	-	ADD 50ohms TO DESCRIPTION
B	09/21/08	-	UPDATE DRAWING FORMAT



RECOMMENDED CABLE STRIPPING DIMENSIONS



RECOMMENDED MOUNTING HOLE

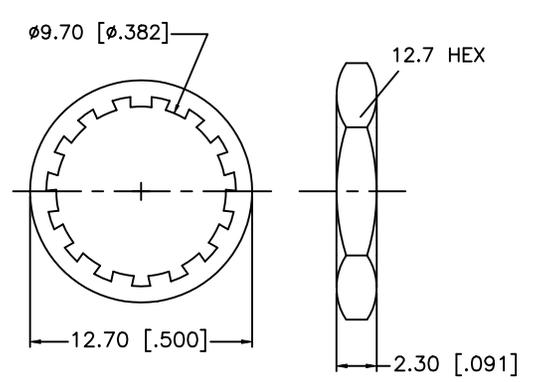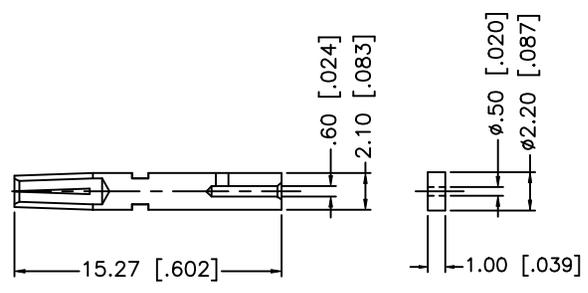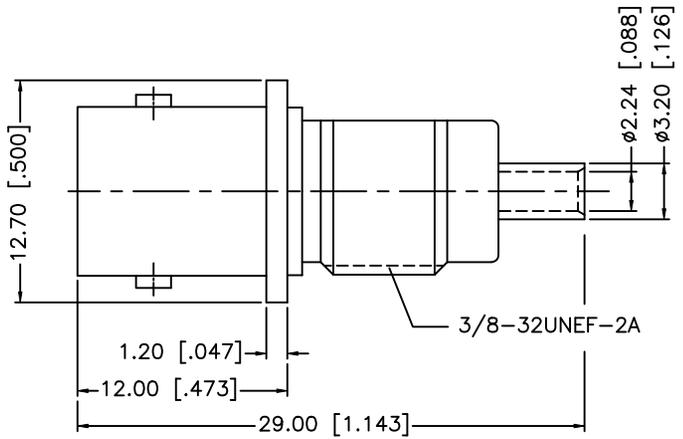

QTY	DESCRIPTION	MATERIAL	FINISH	QTY
1	BODY	BRASS	NICKEL	1
2	BARREL	BRASS	GOLD	1
3	INSULATOR	PTFE	NATURAL	1
4	CONTACT PIN	PHOS. BRONZE	GOLD	1
5	LOCK WASHER	BRASS	NICKEL	1
6	HEX NUT	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DRAWN GRS	09/21/08
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/112/112609.DWG	

Amphenol Connex

PART DESCRIPTION
**BNC BULKHEAD FRONT MOUNT DIRECT
SOLDER JACK - 50ohms (FOR .085", .086" CABLE)**

PART NO. **112609**

DWG. NO. 112609.DWG	REV. B	SIZE A	SCALE NA
---------------------	--------	--------	----------

DO NOT SCALE DRAWING