

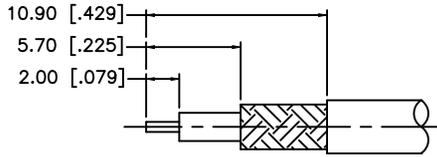


REV.	DATE	DESCRIPTION
NC	03/28/08	INITIAL RELEASE



RECOMMENDED CABLE STRIPPING DIMENSIONS

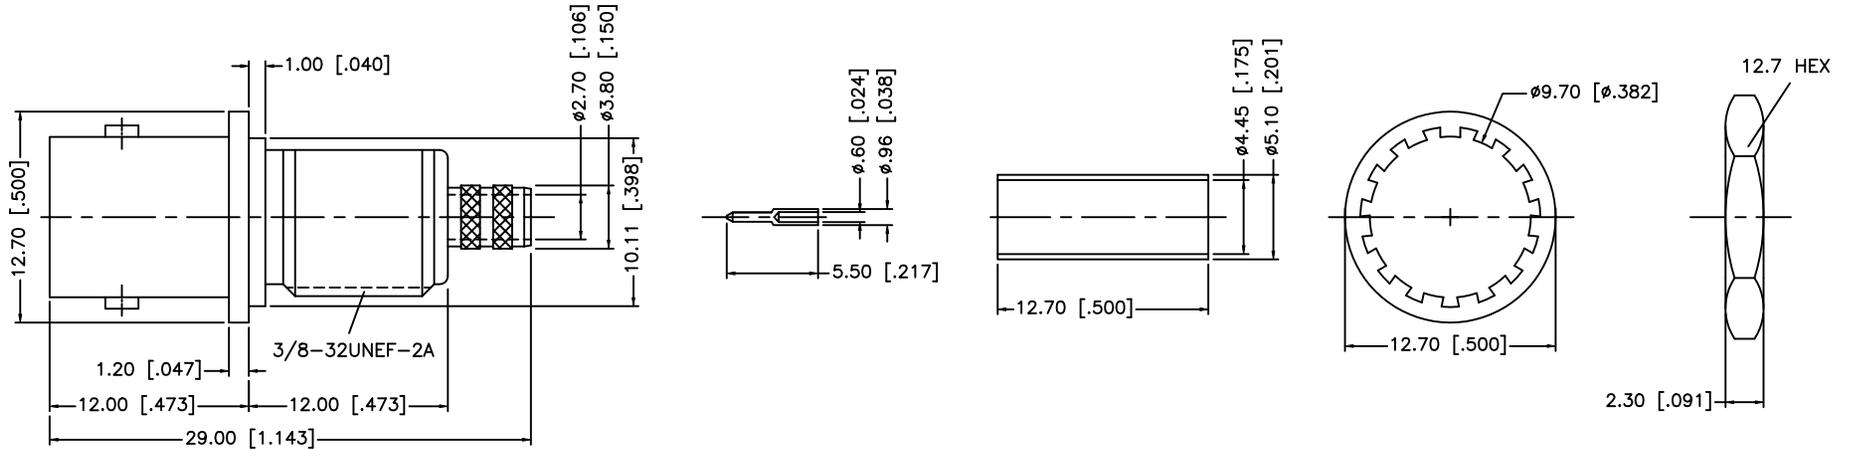

RECOMMENDED MOUNTING HOLE

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .178
2. CONTACT PIN TO SOLDER.

DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>							
8				<p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"</p> <p>DO NOT SCALE DRAWING</p>	DRAWN	G.R.S.		03/28/08	PART DESCRIPTION					
7					CHECKED			BNC BULKHEAD CRIMP JACK (front mount) (FOR RG-180, RG-195 CABLE)						
6	HEX NUT	BRASS	NICKEL		1	ISSUED								
5	LOCK WASHER	BRASS	NICKEL		1	SHEET	1 OF 1							
4	FERRULE	BRASS	NICKEL		1			PART NO.						
3	CONTACT PIN	PHOS. BRONZE	GOLD		1			112734-10						
2	INSULATOR	TEFLON	NATURAL		1									
1	BODY	BRASS	NICKEL		1									
					CAD FILE	C:/112/112734-10.DWG	DWG. NO.	112734-10.DWG	REV.	NC	SIZE	A	SCALE	NA