
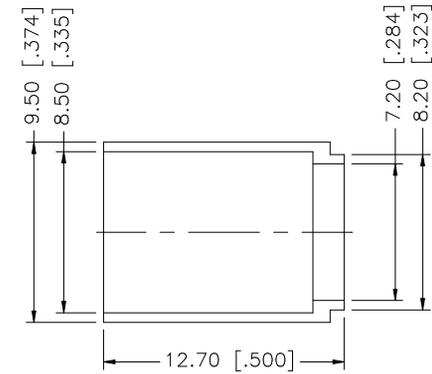
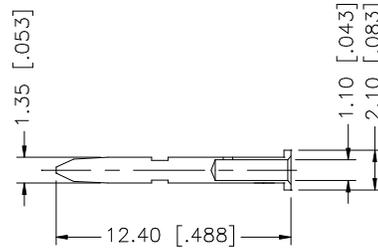
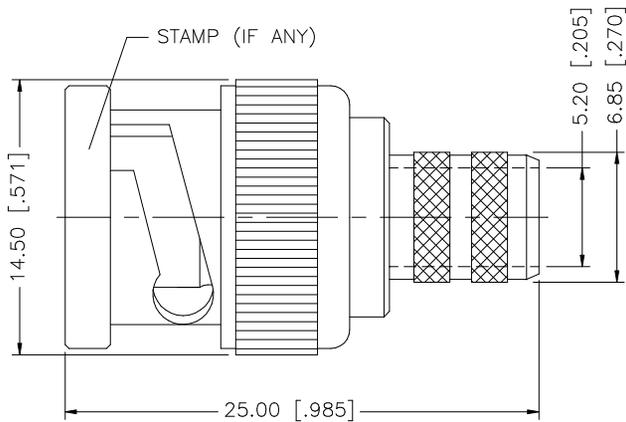


REV.	DATE	DESCRIPTION
A	02/09/04	INITIAL RELEASE

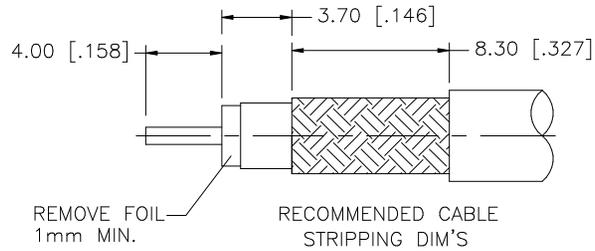

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .043"

8				
7				
6				
5				
4	FERRULE	BRASS	NICKEL	1
3	INSULATOR	TEFLON	NATURAL	1
2	CONTACT PIN	BRASS	GOLD	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	02/09/04
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/112/112986.DWG

<h1>Amphenol Connex</h1>			
PART DESCRIPTION BNC CRIMP PLUG (FOR BELDEN 5339B5 RG-6 PLENUM CABLE)			
PART NO. 112986			
DWG. NO.	112986.DWG	REV. A	SCALE NA