



REV.	DATE	ECR NO.	DESCRIPTION
NC	06/23/09	XXXXXX	INITIAL RELEASE

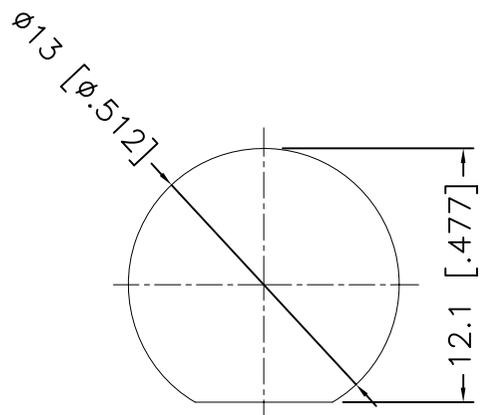


RECOMMENDED MOUNTING HOLE

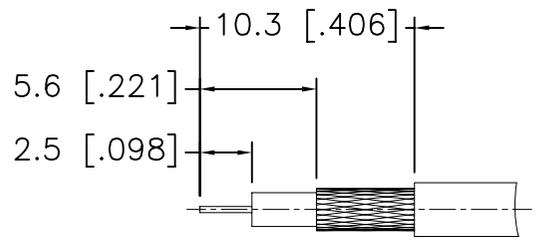

RECOMMENDED CABLE STRIPPING DIM'S

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN  
SQ. CRIMP SIZE 0.7mm
3. MAX. PANEL THICKNESS=7mm

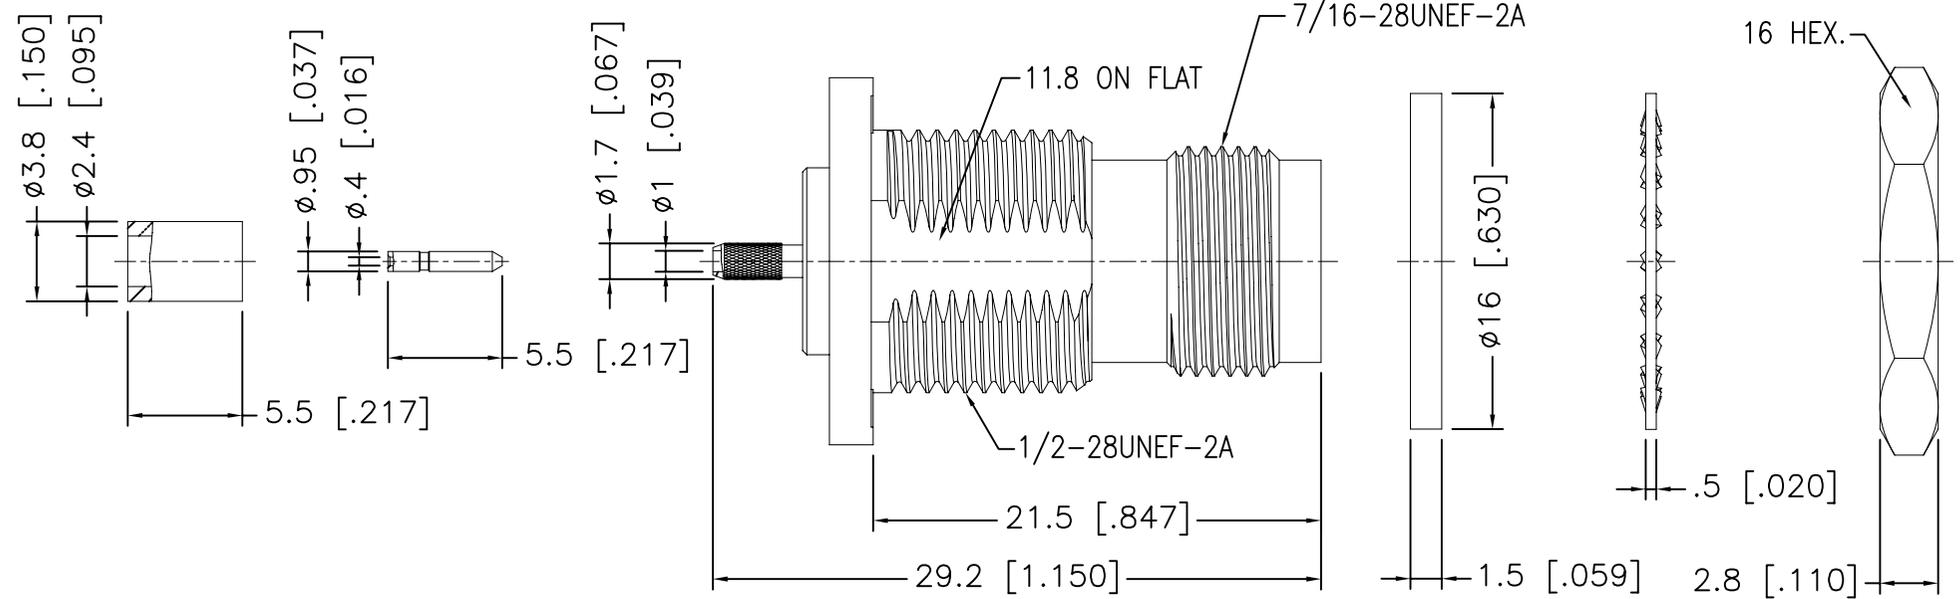

10	FERRULE	COPPER	NICKEL	1
9	CONTACT PIN	BRASS	NICKEL	1
8	HEX NUT	BRASS	NICKEL	1
7	LOCK WASHER	BRASS	NICKEL	1
6	GASKET	RUBBER	RED	1
5	BARREL	BRASS	NICKEL	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	BODY	BRASS	NICKEL	1
2	INSULATOR	PTFE	NATURAL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 ± 0.007"  
.315 - 1.180 ± 0.015"  
1.180 - 4.724 ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN SXIE	06/23/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122403RP.DWG

**Amphenol Connex**

PART DESCRIPTION  
**TNC R/P BULKHEAD CRIMP JACK(FOR RG-178B/U, 196A/U)**

PART NO.  
**122403RP**

DWG. NO. 122403RP.DWG    REV. NC    SIZE A    SCALE NA