


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/02/09	XXXXXX	INITIAL RELEASE

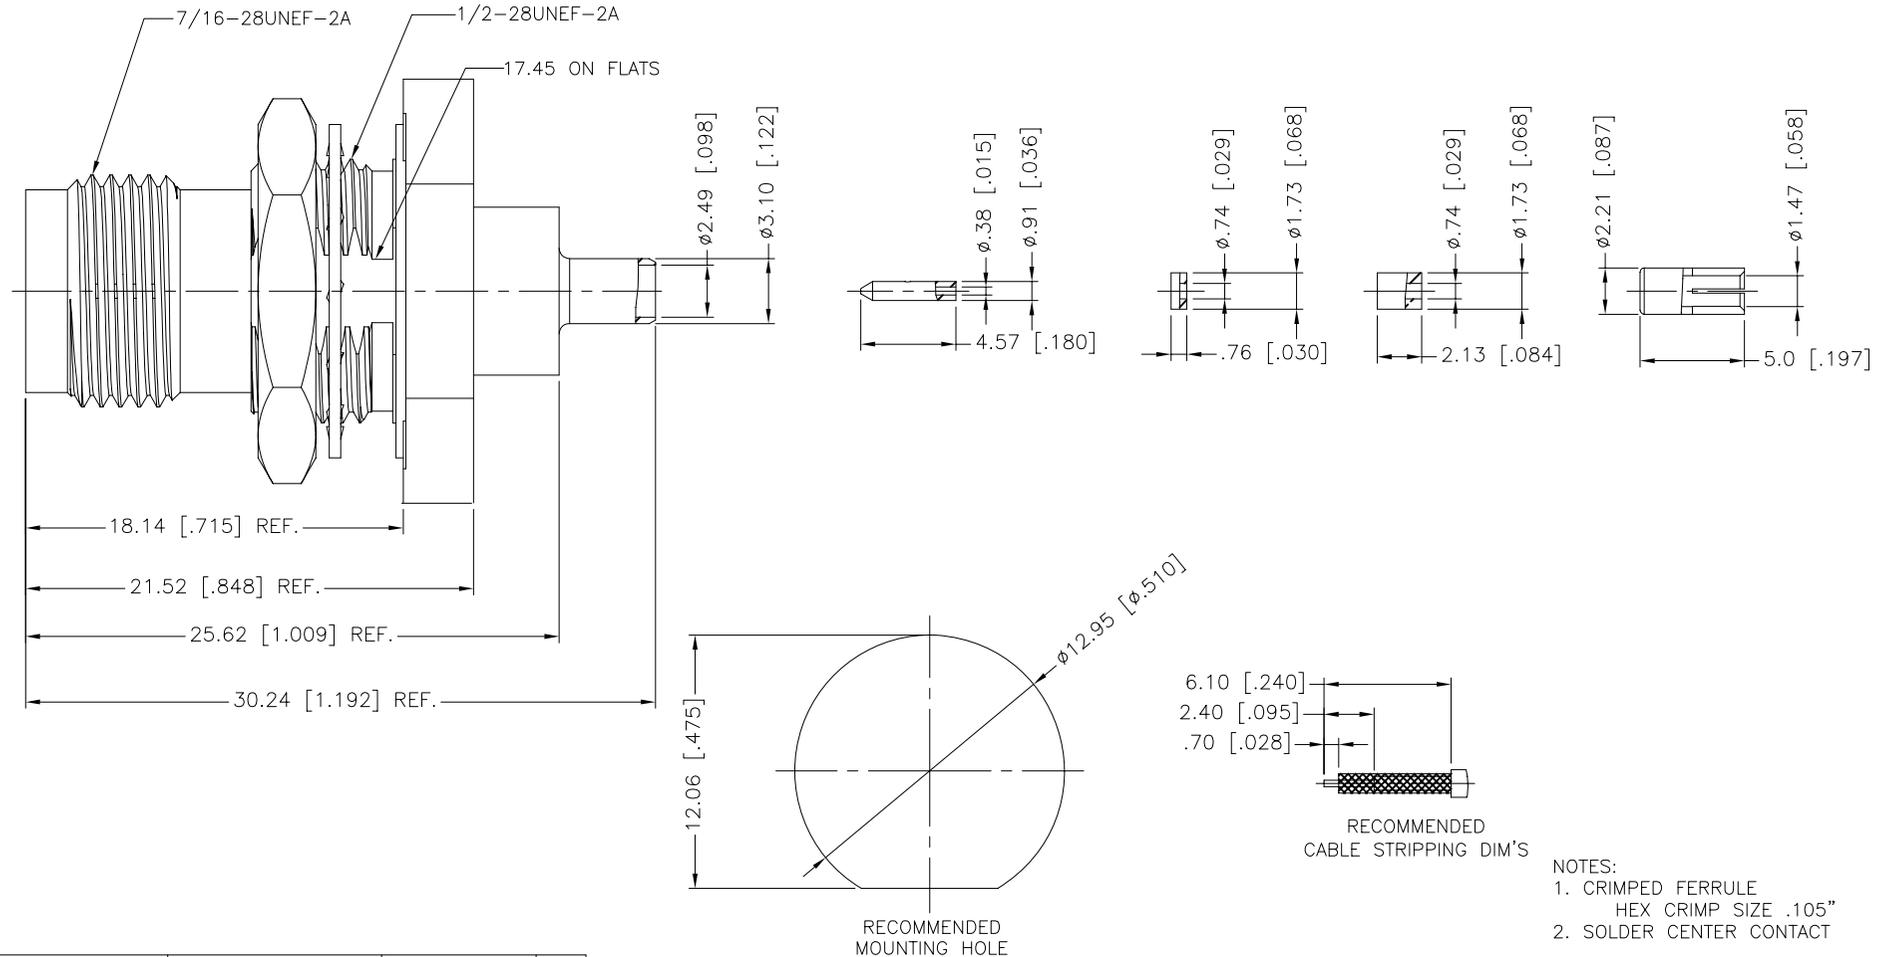

- NOTES:  
 1. CRIMPED FERRULE  
 HEX CRIMP SIZE .105"  
 2. SOLDER CENTER CONTACT

DESCRIPTION	MATERIAL	FINISH	QTY	
11	INNER FERRULE	BRASS	NICKEL	1
10	SLEEVE	BRASS	NICKEL	1
9	INSULATOR	PTFE	NATURAL	1
8	CONTACT PIN	BRASS	GOLD	1
7	HEX NUT	BRASS	NICKEL	1
6	LOCK WASHER	PHOSPHOR BRONZE	NICKEL	1
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
4	GASKET	SILICONE	RED	1
3	BODY	BRASS	NICKEL	1
2	INSULATOR	PTFE	NATURAL	1
1	BARREL	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm ± 0.20mm  
 8 - 30mm ± 0.40mm  
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 ± 0.007"  
 .315 - 1.180 ± 0.015"  
 1.180 - 4.724 ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN J.CHENG	06/02/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/122529.DWG	

**Amphenol Connex**

PART DESCRIPTION  
**TNC BULKHEAD JACK  
 (FOR 1.32 MM CABLE)**

PART NO.  
**122529**

DWG. NO. 122529.DWG    REV. NC    SIZE A    SCALE NA