
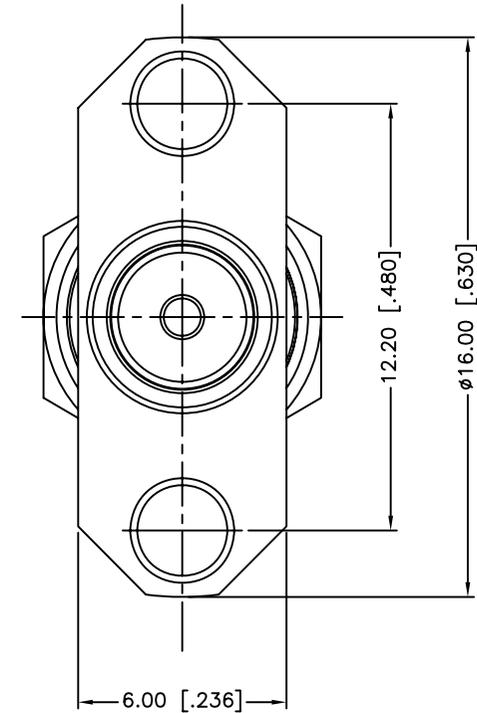


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/17/13	XXXXXX	INITIAL RELEASE

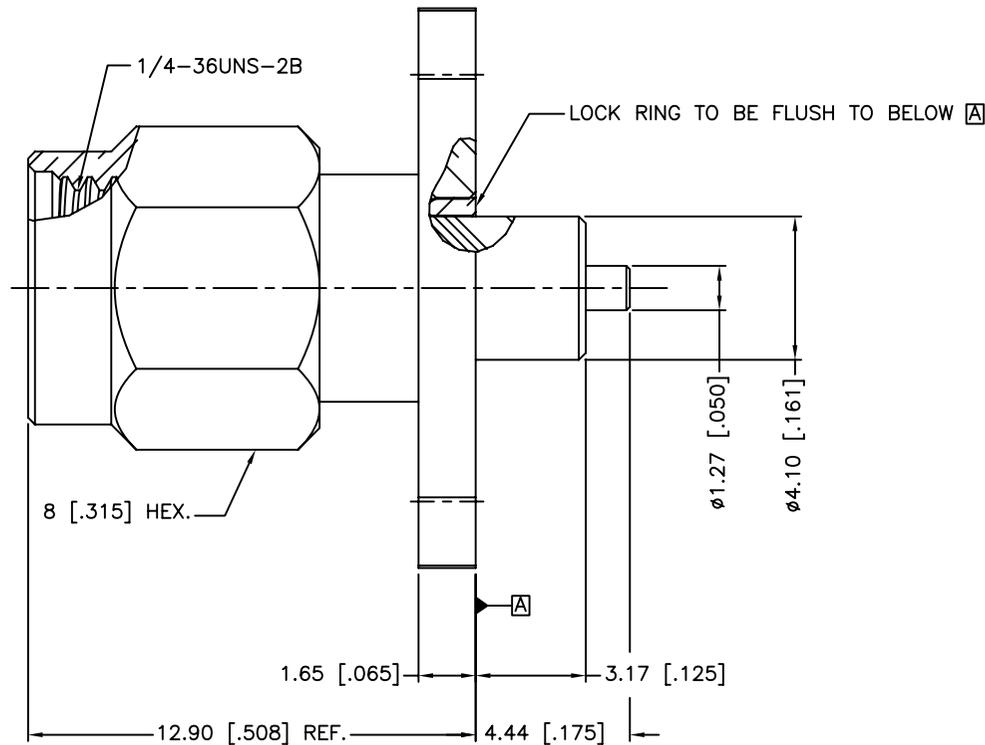

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC-18 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED				APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>
8	CONTACT PIN	BRASS	GOLD	1	DRAWN M.ZHANG	
7	INSULATOR	PTFE	NATURAL	1		
6	LOCK RING	BRASS	GOLD	1	CHECKED	
5	BODY	BRASS	GOLD	1	ISSUED	
4	INSULATOR	PTFE	NATURAL	1	SHEET 1 OF 1	
3	RETAINER RING	SUS 304	NATURAL	1		
2	GASKET	SILICONE RUBBER	RED	1		
1	SHELL	BRASS	GOLD	1		
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/CONNEX/132145-13.DWG	PART DESCRIPTION <b>SMA PANEL RECEPT. PLUG-2 HOLE,            EXTENDED TEFLON/CONTACT (.125"/.175")</b>
DO NOT SCALE DRAWING						PART NO. <b>132145-13</b>
						DWG. NO. 132145-13.DWG REV. NC SIZE A SCALE NA