







REV.	DATE	DESCRIPTION
A	11/06/04	MODIFY BODY/CONTACT PIN/FERRULE DIMS

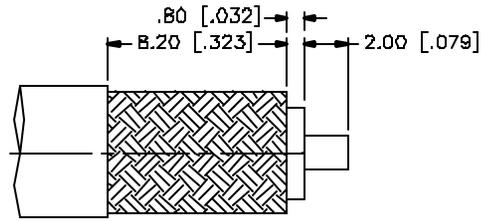

RECOMMENDED  
CABLE STRIPPING DIM'S



RECOMMENDED  
MOUNTING HOLE

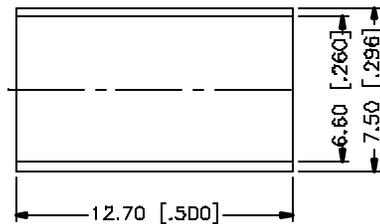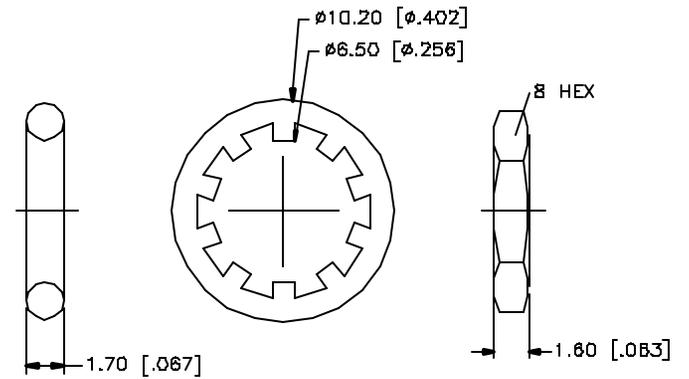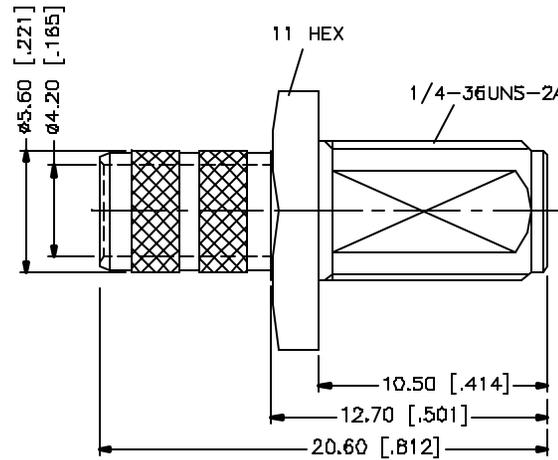

- NOTE:
1. CRIMPED FERRULE  
HEX CRIMP SIZE .255"
  2. CONTACT PIN TO SOLDER

REV.	DATE	DESCRIPTION
A	11/06/04	MODIFY BODY/CONTACT PIN/FERRULE DIMS
8		
7	FERRULE	COPPER
6	HEX NUT	BRASS
5	LOCK WASHER	BRASS
4	GASKET	SILICONE
3	CONTACT PIN	BR. COPPER
2	INSULATOR	TEFLON
1	BODY	BRASS
	DESCRIPTION	MATERIAL
		FINISH
		QTY
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN ( ) ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.3 - 3mm ± 0.20mm 3 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING		
APPROVALS		DATE
DRAWN	G.R.S.	11/06/04
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE		
C:/132/132283.DWG		
<b>Amphenol Connex</b>		
PART DESCRIPTION		
SMA BULKHEAD CRIMP JACK (FOR RG-8/X, LMR240)		
PART NO.		
132283		
DWG. NO.	132283.DWG	REV. A
SIZE	A	SCALE
		NA