


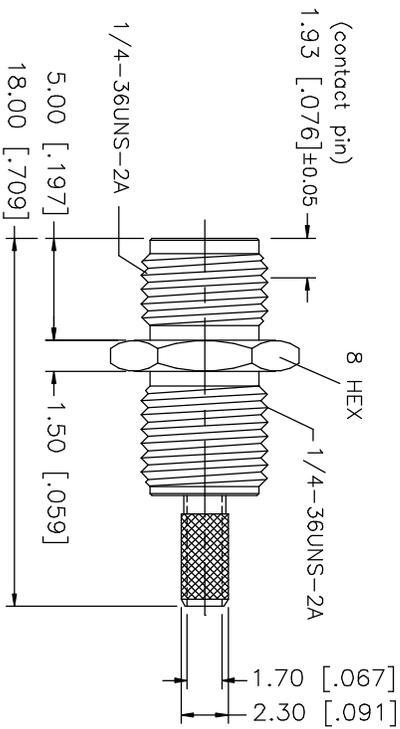


REV.	DATE	DESCRIPTION
NC	12/03/02	INITIAL RELEASE

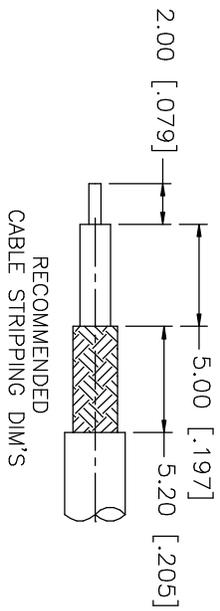

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE ".128"
2. CONTACT PIN SOLDER

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION SMA CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)			REV.			
7				DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	12/03/02				SIZE	FSQM NO.	DWG. NO.	NC
6					CHECKED					SCALE	NA	PART NO.	132350.DWG
5	FERRULE	COPPER	GOLD		ISSUED					A	99001	132350	1 OF 1
4	CONTACT PIN	BER. COPPER	GOLD										
3	RING	BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"									
2	INSULATOR	TEFLON	NATURAL										
1	BODY	BRASS	GOLD										
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING									