











REV.	DATE	ECR NO.	DESCRIPTION
NC	10/07/08	-	INITIAL RELEASE
A	03/09/09	-	REVISE BODY/COMPONENTS CONFIGURATION



RECOMMENDED MOUNTING HOLE



RECOMMENDED CABLE STRIPPING DIMENSIONS

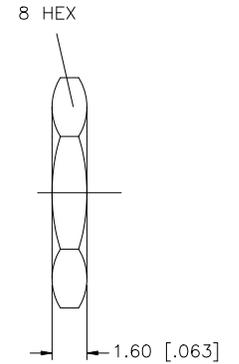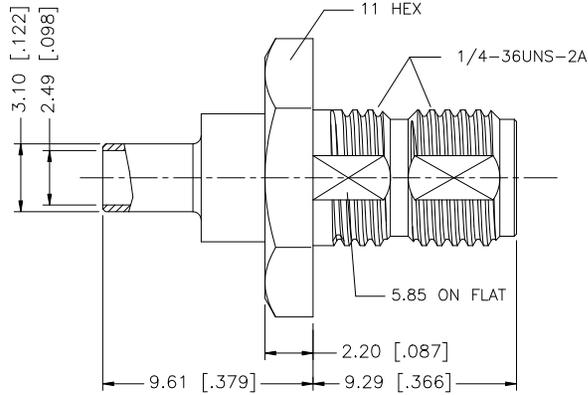

DESCRIPTION	MATERIAL	FINISH	QTY	
9	HEX NUT	BRASS	GOLD	1
8	LOCK WASHER	BRASS	GOLD	1
7	GASKET	SILICONE	RED	1
6	INNER FERRULE	BRASS	GOLD	1
5	SLEEVE	BRASS	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DRAWN GRS	03/09/08
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/132/132389.DWG

Amphenol Connex

PART DESCRIPTION
SMA BULKHEAD CRIMP JACK (FOR 1.32mm CABLE)
PART NO. 132389
DWG. NO. 132389.DWG
REV. A
SIZE A
SCALE NA

DO NOT SCALE DRAWING