



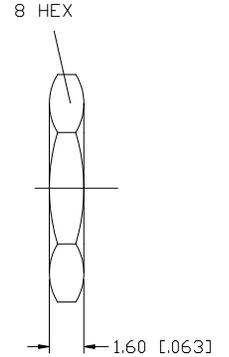

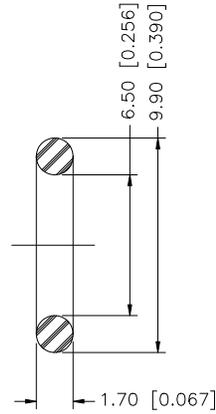
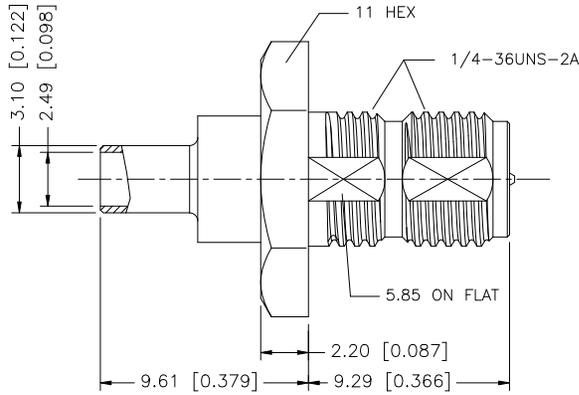




REV.	DATE	ECR NO.	DESCRIPTION
NC	10/09/08	-	INITIAL RELEASE
A	03/09/09	-	REVISE BODY/COMPONENTS CONFIGURATION



QTY	DESCRIPTION	MATERIAL	FINISH	QTY
9	HEX NUT	BRASS	GOLD	1
8	LOCK WASHER	BRASS	GOLD	1
7	GASKET	SILICONE	RED	1
6	INNER FERRULE	BRASS	GOLD	1
5	SLEEVE	BRASS	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DRAWN GRS	03/09/08
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/132/132392.DWG

# Amphenol Connex

PART DESCRIPTION	PART NO.	DWG. NO.	REV.	SIZE	SCALE
SMA BULKHEAD CRIMP JACK (FOR 1.37mm CABLE)	132392	132392.DWG	A	A	NA

DO NOT SCALE DRAWING