

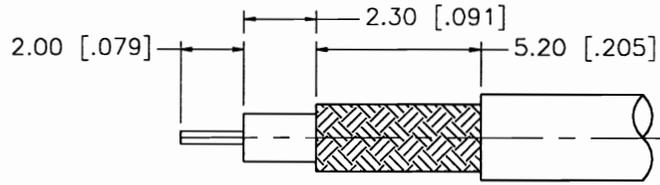
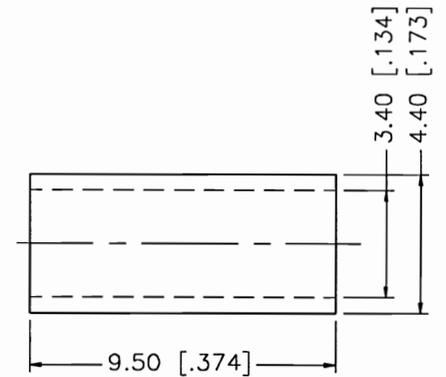


REV.	DATE	DESCRIPTION
A	09/03/00	MODIFY BODY PLATING SPEC.

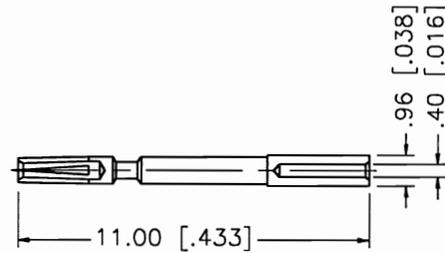

RECOMMENDED
CABLE STRIPPING DIM'S

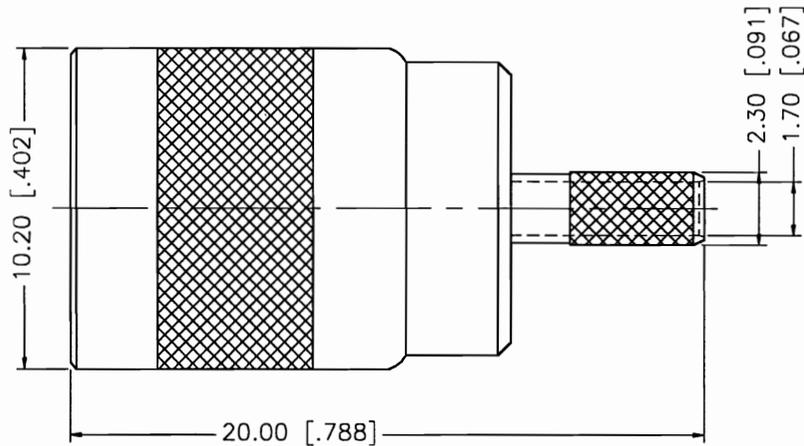

CRIMP NOTES:
1) CRIMP FERRULE
HEX CRIMP SIZE .151"

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connex Connector Corporation									
1	BODY	BRASS	NICKEL	DRAWN	G.R.S.					09/03/00	Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)				
2	INSULATOR	TEFLON	NATURAL	CHECKED			Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)								
3	CONTACT PIN	BER. COPPER	GOLD	ISSUED							Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)				
4	FERRULE	COPPER	GOLD				Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)								
5											Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)				
6							Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)								
7											Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)				
8							Connex Connector Corporation Connector Corporation SMB SNAP LOCK CRIMP PLUG (FOR RG-179 DOUBLE BRAID CABLE - 75ohms)								
			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4			TITLE					SIZE		FSCM NO.		DWG. NO.
			DO NOT SCALE DRAWING			A		A		99001		142285.DWG		A	
						SCALE		PART NO.		SHEET		1 OF 1			
						NA		142285		1		1 OF 1			