


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/8/95	XXXXXX	INITIAL RELEASE
A	06/19/97	XXXXXX	CHANGE POSITION OF 23.1 DIMENSION
B	02/19/13	2445	CORRECT BODY PLATING, UPDATE DRAWING FORMAT

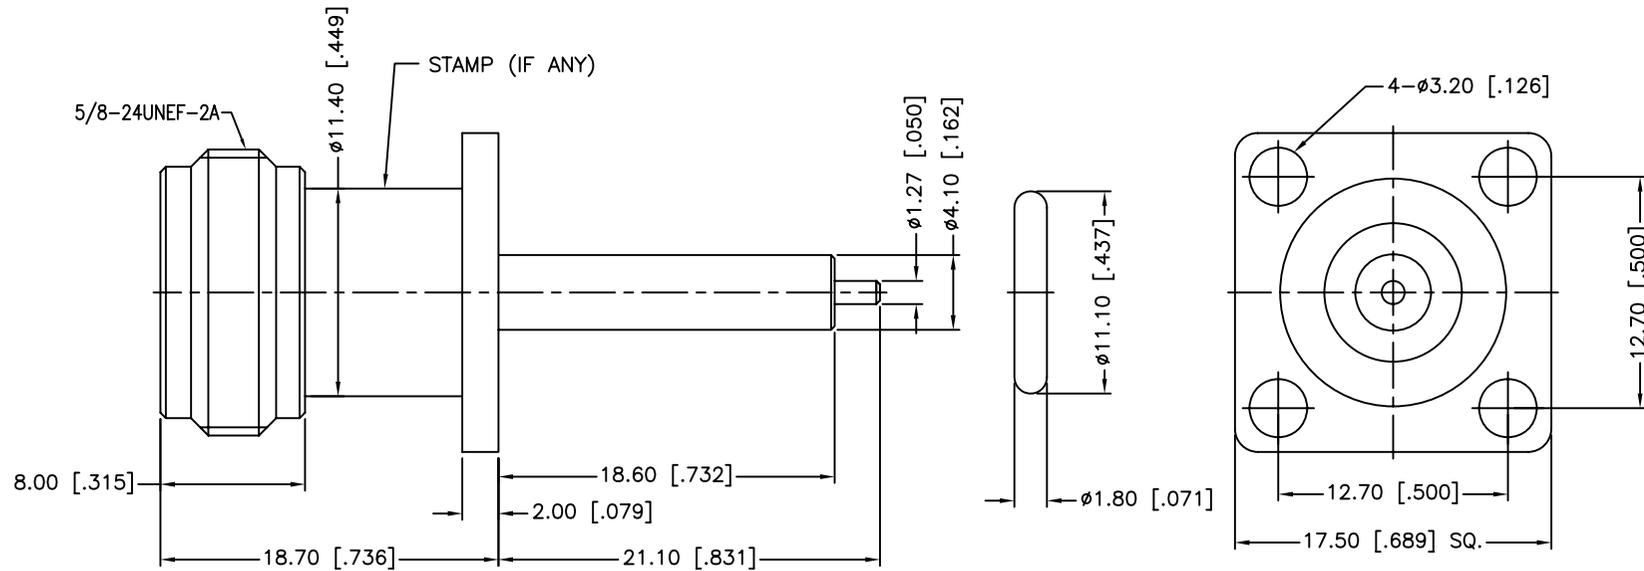

1. IMPEDANCE:50 OHM
2. FREQUENCY RANGE: DC-6 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex			
				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: <0.5 ± 0.05mm 0.5 - 6mm ± 0.10mm 6 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm ANGLES ± 1°	DRAWN S.LI	02/19/13				PART DESCRIPTION N 4-HOLE FLANGE PANEL RECEPTACLE EXTENDED PTFE .732/.831"
				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: <.020 ± 0.002" .020 - .236 = ± 0.004" .236 - 1.180 = ± 0.007" 1.180 - 4.724 = ± 0.012" ANGLES ± 1°	CHECKED		PART NO. 172183			
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1	ISSUED					DWG. NO. 172183.DWG
3	GASKET	SILICONE RUBBER	RED	1	SHEET 1 OF 1		REV. B	SIZE A	SCALE NA	
2	INSULATOR	PTFE	NATURAL	1	CAD FILE C:/CONNEX/172183.DWG					
1	BODY	BRASS	NEXCOTE	1	DO NOT SCALE DRAWING					
DESCRIPTION				MATERIAL	FINISH	QTY				