
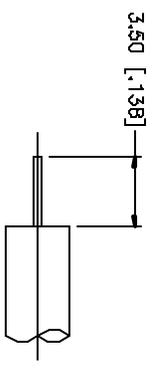
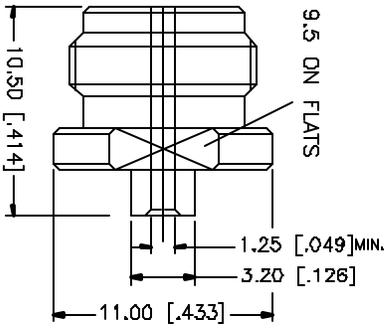

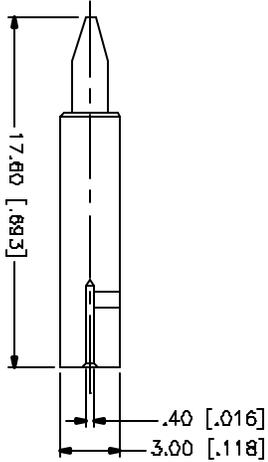


REV.	DATE	DESCRIPTION
NC	03/27/05	INITIAL RELEASE

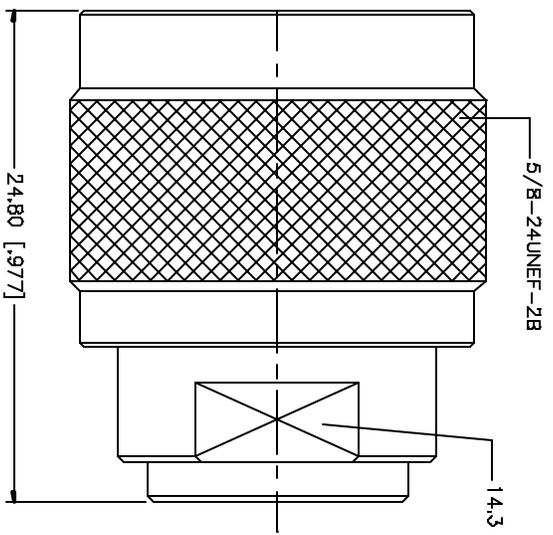

RECOMMENDED  
CABLE STRIPPING DIM'S

NOTE:  
1. CONTACT OIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	NEXCOTE	BRASS	BODY
1	NATURAL	TEFLON	INSULATOR
1	GOLD	BRASS	CONTACT PIN
1	NATURAL	TEFLON	INSULATOR
1	GOLD	BRASS	SOLDER NUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR DIMENSIONS SPECIFIED ONLY. TOLERANCES FOR MILLIMETERS ARE:  
 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE:  
 .020 - .315 ± 0.007"  
 .315 - 1.180 ± 0.015"  
 1.180 - 4.1724 ± 0.020"

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR DIMENSIONS SPECIFIED ONLY. TOLERANCES FOR MILLIMETERS ARE:  
 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE:  
 .020 - .315 ± 0.007"  
 .315 - 1.180 ± 0.015"  
 1.180 - 4.1724 ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/27/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

PART NO. 172322

PART DESCRIPTION  
N DIRECT SOLDER PLUG  
(FOR .047" SEMI RIGID CABLE)

DWG. NO. 172322 DWG

REV. NC

SIZE A

SCALE NA