

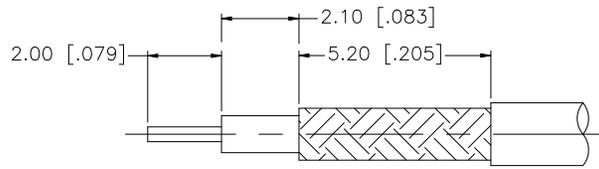
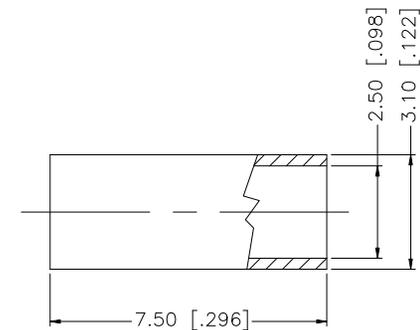


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/03/09	-	INITIAL RELEASE

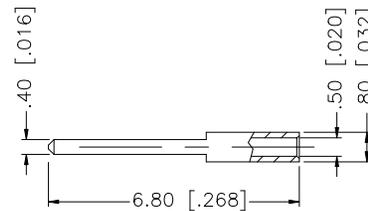

RECOMMENDED CABLE STRIPPING DIM'S.

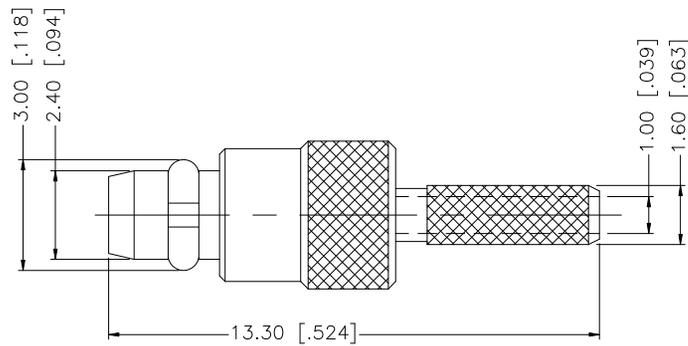

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .105" [2.67].

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	<h1 style="text-align: center;">Amphenol Connex</h1>							
8							<p style="text-align: center;">MMCX CRIMP PLUG (FOR RG187/U, 196/U CABLE)</p> <p style="text-align: center;">PART NO. 262100N</p>							
7														
6	FERRULE	BRASS	NICKEL	1	DRAWN	GRS					03/03/09			
5	RETAINING RING	PHOS. BRONZE	NICKEL	1	CHECKED									
4	BARREL	BRASS	NICKEL	1	ISSUED									
3	CONTACT PIN	BRASS	GOLD	1	SHEET	1 OF 1								
2	INSULATOR	PTFE	NATURAL	1										
1	BODY	BRASS	NICKEL	1										
					CAD FILE	C:/262/262100N.DWG	DWG. NO.	262100N.DWG	REV.	NC	SIZE	A	SCALE	NA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"