
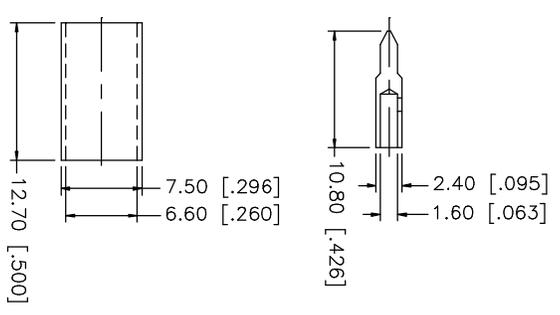
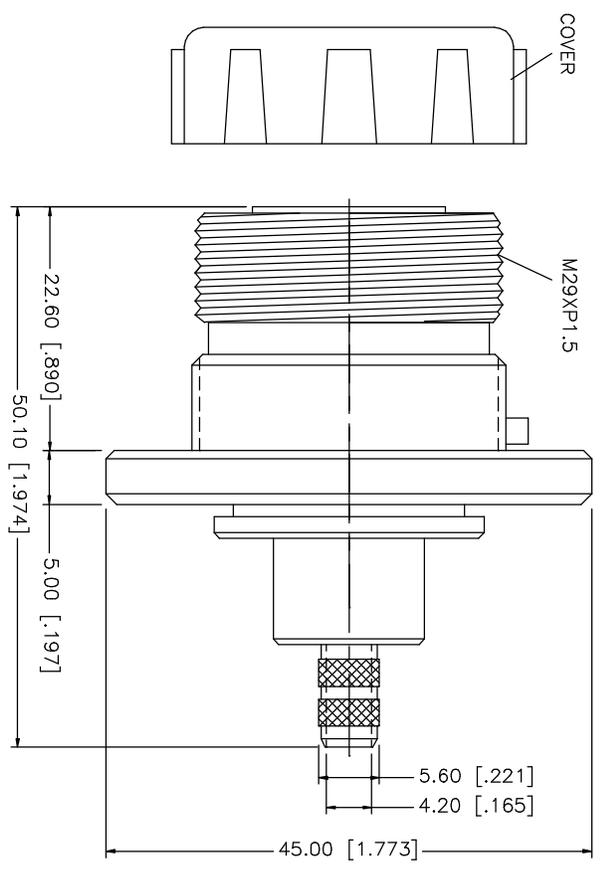
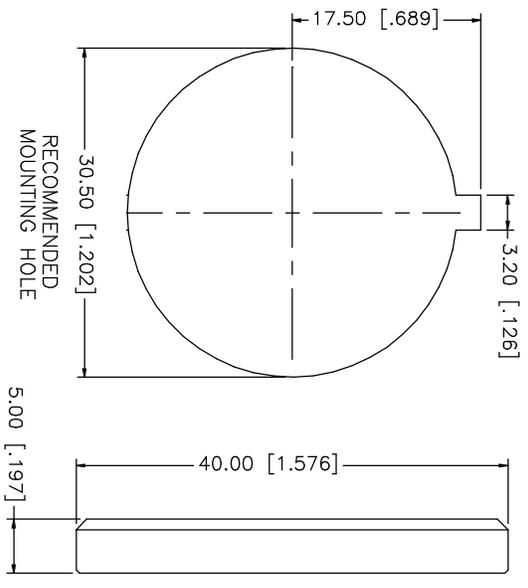


REV.	DATE	DESCRIPTION
NC	06/11/03	INITIAL RELEASE

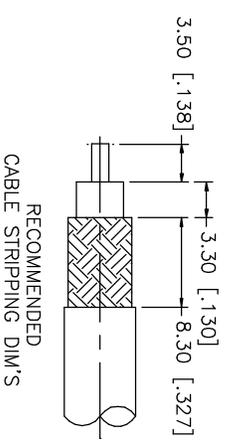

NOTE:
 1. CRIMPED FERRULE
 HEX CRIMP SIZE .255"
 2. CRIMPED CONTACT PIN
 HEX CRIMP SIZE .068"
 OR CONTACT PIN TO SOLDER

8	7	6	5	4	3	2	1													
SPANNER NUT	FERRULE	COVER	GASKET	CONTACT PIN	INSULATOR	BODY	DESCRIPTION	BRASS	COPPER	P.E.	N.B.R.	BER. COPPER	TEFLON	BRASS	SILVER	SILVER	SILVER	SILVER	SILVER	SILVER
1	1	1	1	1	1	1														
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING																				
APPROVALS DRAWN G.R.S. CHECKED ISSUED SHEET 1 OF 1										DATE 06/11/03 PART DESCRIPTION 7/16 BULKHEAD CRIMP JACK (FOR RG-8/X, LMR-240 CABLE) 272185										
CAD FILE C:/272/272185.DWG										DWG. NO. 272185.DWG REV. NC SIZE A SCALE NA										

Amphenol Connex