


NOTES:

1. MATERIALS AND FINISHES:
 BODY - BRASS, NICKEL PLATING
 CONTACT - BRASS, GOLD PLATING
 INSULATOR - DELRIN, NATURAL
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: - 40°C to +85°C
4. CRIMPED FERRULE
 CRIMP HEX SIZE .213"
5. HEX CRIMP SIZE .068"
 FOR CENTER CONTACT




THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	STAMP FOR SHELL WAS CHANGED	11-Jun-08		SH
M	SPRING WAS CHANGED	23-Dec-10	47967	SH

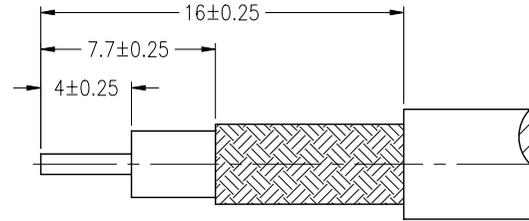

RECOMMENDED
CABLE STRIPPING DIM'S

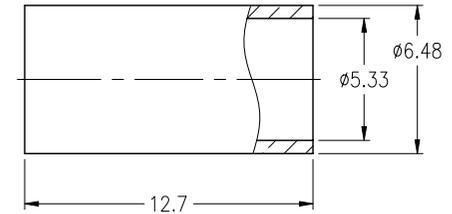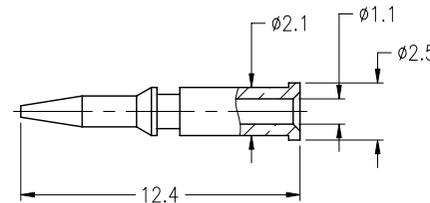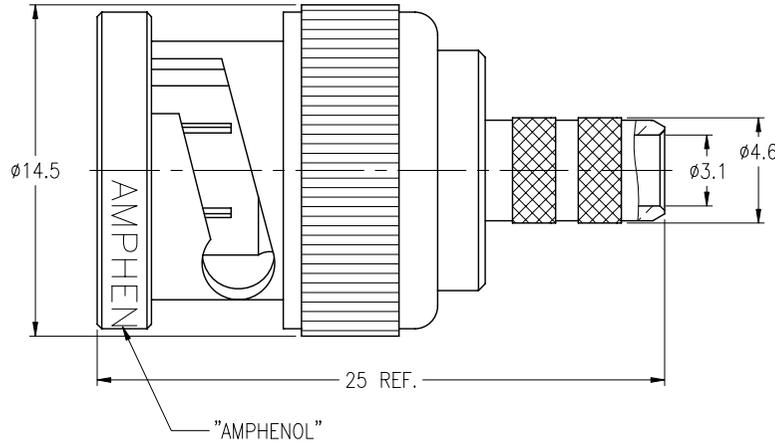

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°</p> <p>NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.</p>	MATERIAL	DRAWN T.DENG	DATE 21-Dec-10	TITLE BNC CRIMP PLUG FOR RG-58 & 141/U CABLE		Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com		
	REFERENCE	ENGINEER S.LI	DATE 21-Dec-10			DRAWING NO. 31-320-RFX1-ND3G		
	FINISH	APPROVED S.HSIEH	DATE 23-Dec-10	SCALE: 3/1	SHEET 2 OF 2		ITEM NO. 011120ABWA2ND5F	
			CAD FILE F:\DWG\APL\EGL\RFX1\31\320\ND3G-MSZ	DWG SIZE B	CODE ID 74868	REV M	PART NO. 31-320-RFX1	