

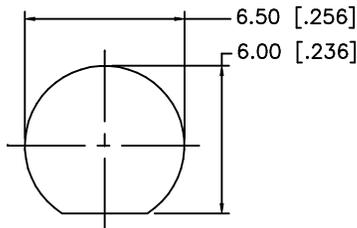
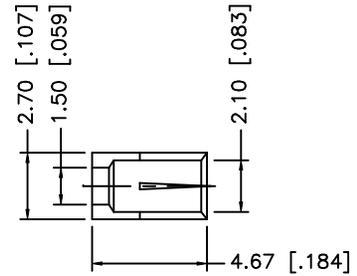
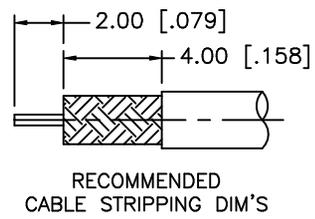
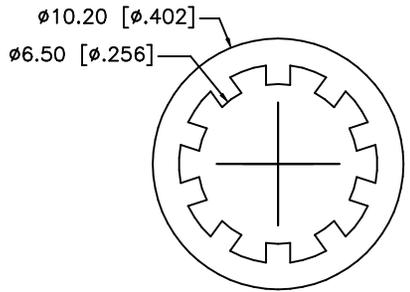
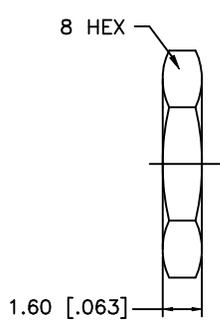
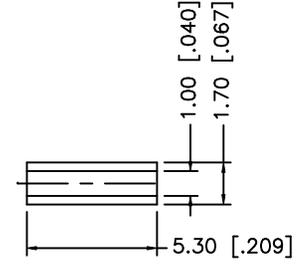
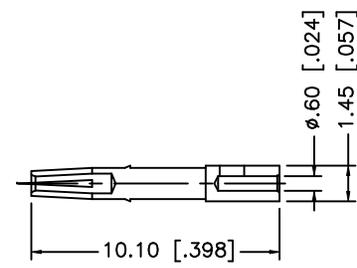


REV.	DATE	DESCRIPTION
A	04/04/01	UPDATE STRIPPING AND FERRULE DIMS
B	12/03/03	UPDATE DRAWING FORMAT

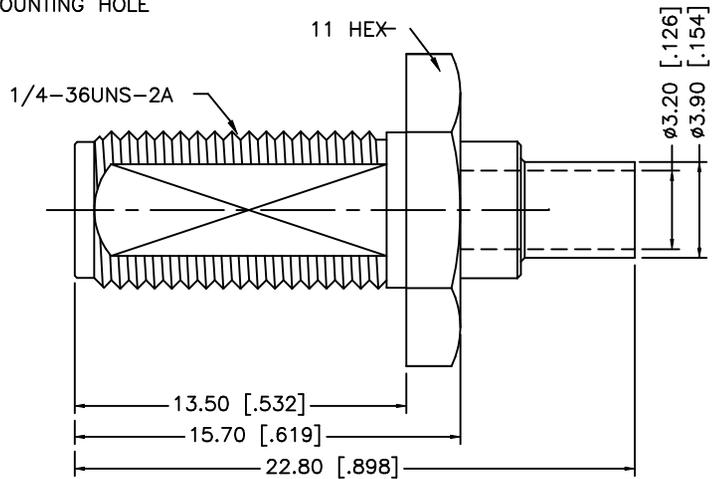

RECOMMENDED MOUNTING HOLE

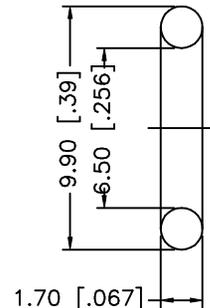

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER
 3. MAX. PANEL THICKNESS = 4.5mm

DESCRIPTION	MATERIAL	FINISH	QTY
8			
7	FERRULE	BRASS	GOLD 1
6	HEX NUT	BRASS	GOLD 1
5	LOCK WASHER	BRASS	GOLD 1
4	GASKET	SILICONE	RED 1
3	CONTACT PIN	BER. COPPER	GOLD 1
2	INSULATOR	TEFLON	NATURAL 1
1	BODY	BRASS	GOLD 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	12/03/03
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/132/132286-10.DWG	

Amphenol Connex

PART DESCRIPTION
**SMA BULKHEAD CRIMP JACK O-RING SEAL
(FOR RG-178B/U, 196A/U CABLE)**

PART NO.
132286-10

DWG. NO. 132286-10.DWG	REV. B	SIZE A	SCALE NA
------------------------	--------	--------	----------