
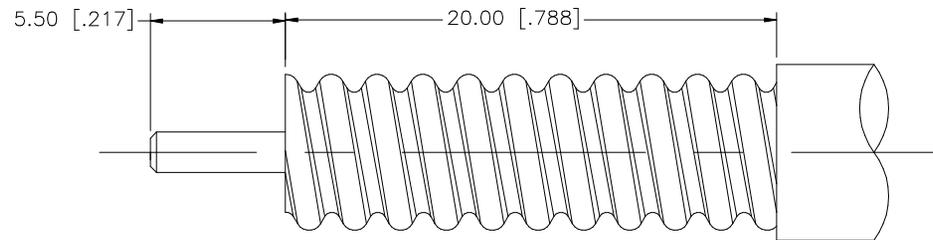


REV.	DATE	DESCRIPTION
NC	11/20/06	INITIAL RELEASE

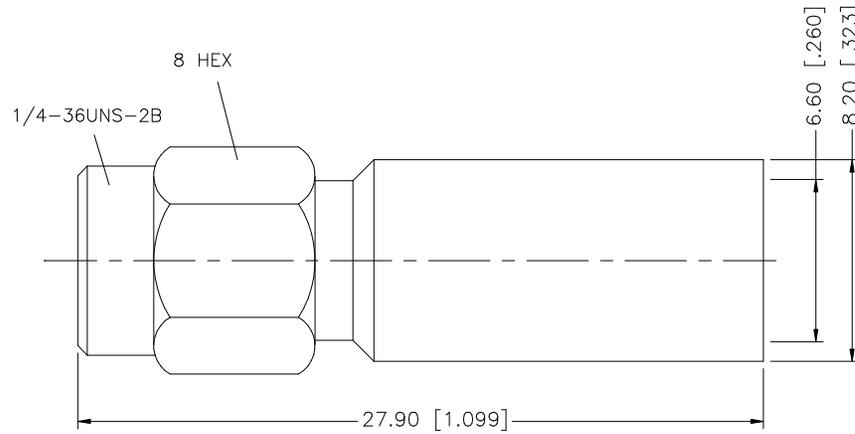

RECOMMENDED CABLE STRIPPING DIMS

8					<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:</small> 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:</small> .020 - .315 ± ± 0.007" .315 - 1.180 ± ± 0.015" 1.180 - 4.724 ± ± 0.020"	APPROVALS	DATE	<h1 style="color: blue; text-align: center;">Amphenol Connex</h1>		
7				DRAWN		G.R.S.	11/20/06			
6				CHECKED				PART NO. <h2 style="text-align: center;">132FPH1</h2>		
5				ISSUED						
4				SHEET	1 OF 1					
3	CONTACT PIN	BRASS	GOLD	1	DO NOT SCALE DRAWING					
2	INSULATOR	TEFLON	NATURAL	1	C:/132/132FPH1.DWG					
1	BODY	BRASS	GOLD	1						
	DESCRIPTION	MATERIAL	FINISH	QTY						