

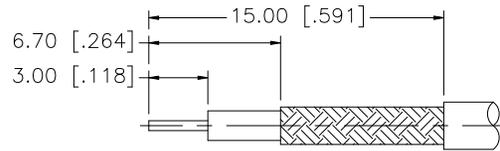
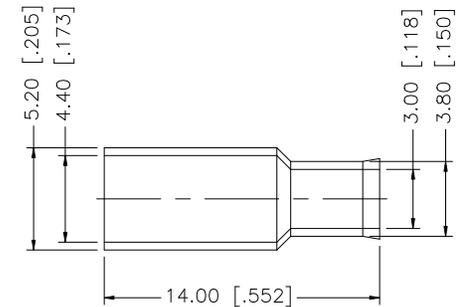
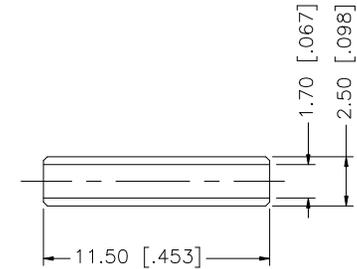


| REV. | DATE | ECR NO. | DESCRIPTION |
|------|----------|---------|----------------------------------|
| NC | 11/05/99 | - | INITIAL RELEASE |
| A | 07/10/08 | - | REVISE BODY STYLE AND COMPONENTS |

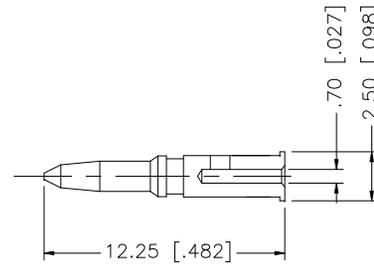

RECOMMENDED
CABLE STRIPPING DIM'S

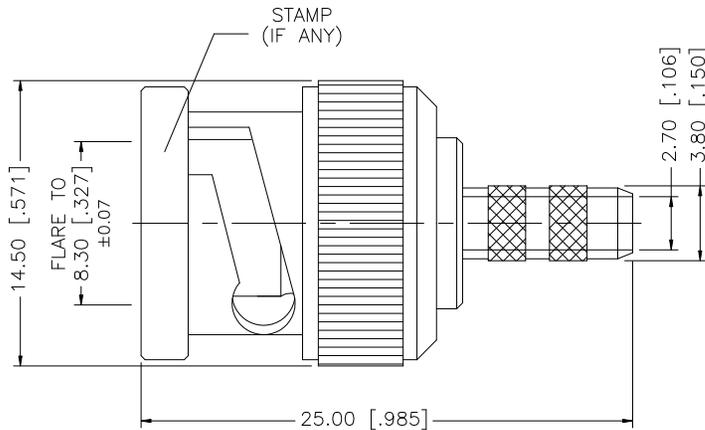

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

| DESCRIPTION | MATERIAL | FINISH | QTY | DO NOT SCALE DRAWING | APPROVALS | DATE | Amphenol Connex | | | | | |
|-------------|----------|--------|-----|----------------------|-----------|--------------------|-----------------|--|-------------|--------|--------|----------|
| | | | | | DRAWN | GRS | 07/10/08 | PART DESCRIPTION | | | | |
| | | | | | CHECKED | | | BNC CRIMP PLUG – HIGH PERFORMANCE (FOR RG-174/U, 118A/U, 316/U CABLE) | | | | |
| | | | | | ISSUED | | | PART NO. | | | | |
| | | | | | SHEET | 1 OF 1 | | 112134T | | | | |
| | | | | | CAD FILE | C:/112/112134T.DWG | | DWG. NO. | 112134T.DWG | REV. A | SIZE A | SCALE NA |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"