


REV.	DATE	DESCRIPTION
NC	01/10/00	INITIAL RELEASE
A	03/18/05	UPDATE DRAWING FORMAT

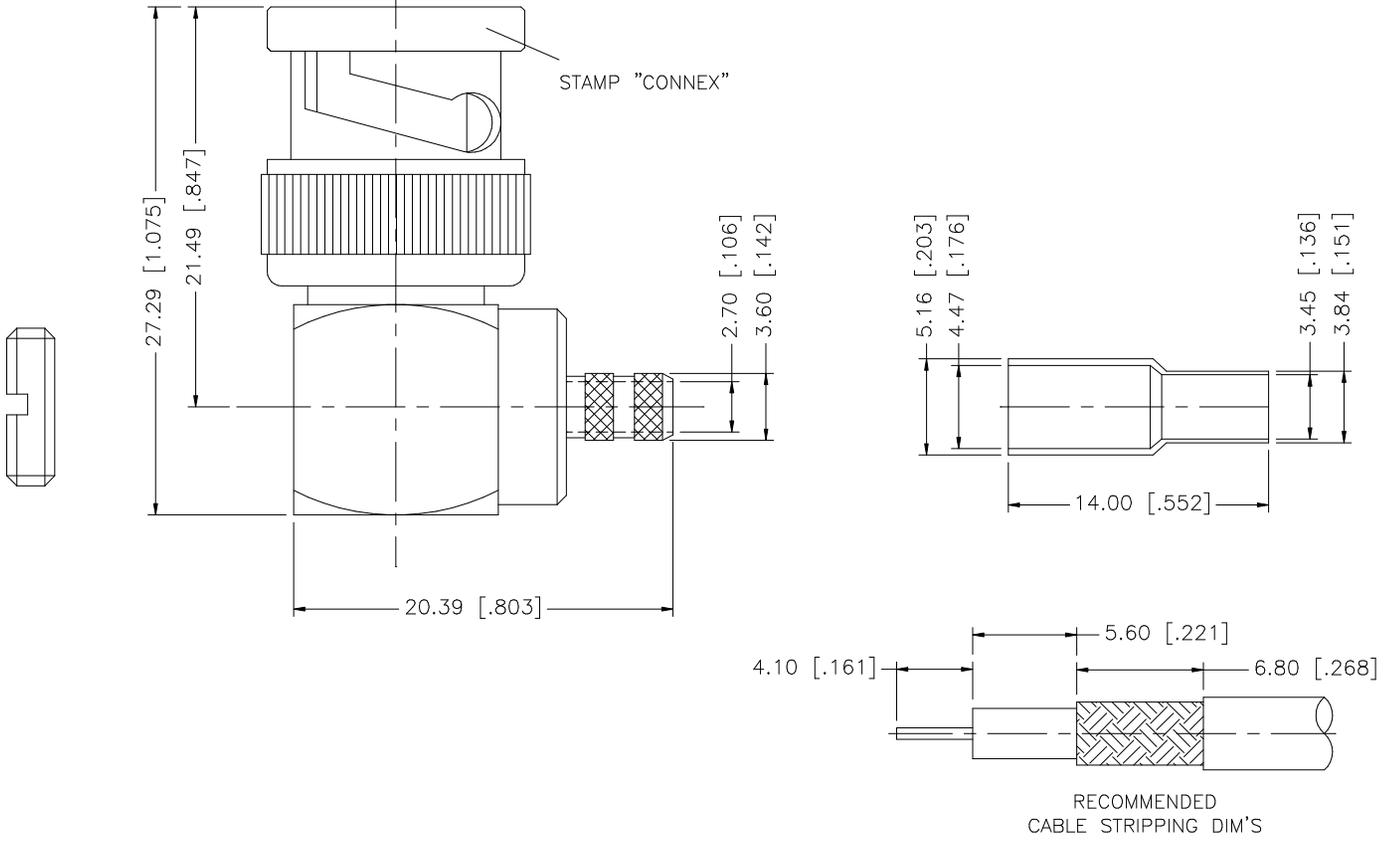

CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	COPPER	FERRULE
1	GOLD	PHOS. BRONZE	CONTACT PIN
1	NATURAL	DELRIN	INSULATOR
1	NICKEL	BRASS	BODY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/18/05
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/112/112646.DWG

PART DESCRIPTION			
Amphenol Connex			
BNC R/A CRIMP PLUG (FOR RG-179/U DOUBLE BRAID CABLE)			
PART NO. 112646			
DWG. NO.	112646.DWG	REV. A	SCALE NA