





REV.	DATE	ECR NO.	DESCRIPTION
NC	03/31/09	XXXXXX	INITIAL RELEASE

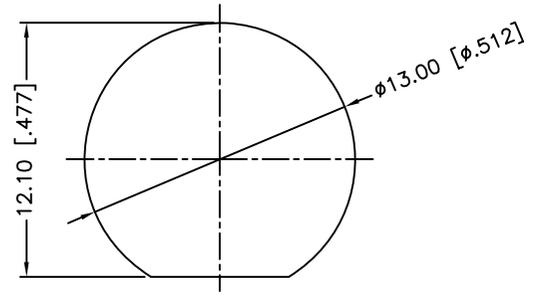

RECOMMENDED MOUNTING HOLE



RECOMMENDED CABLE STRIPPING DIM'S

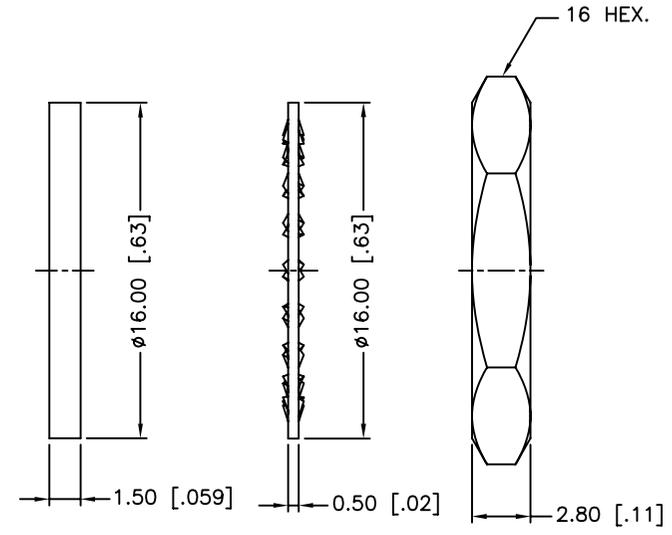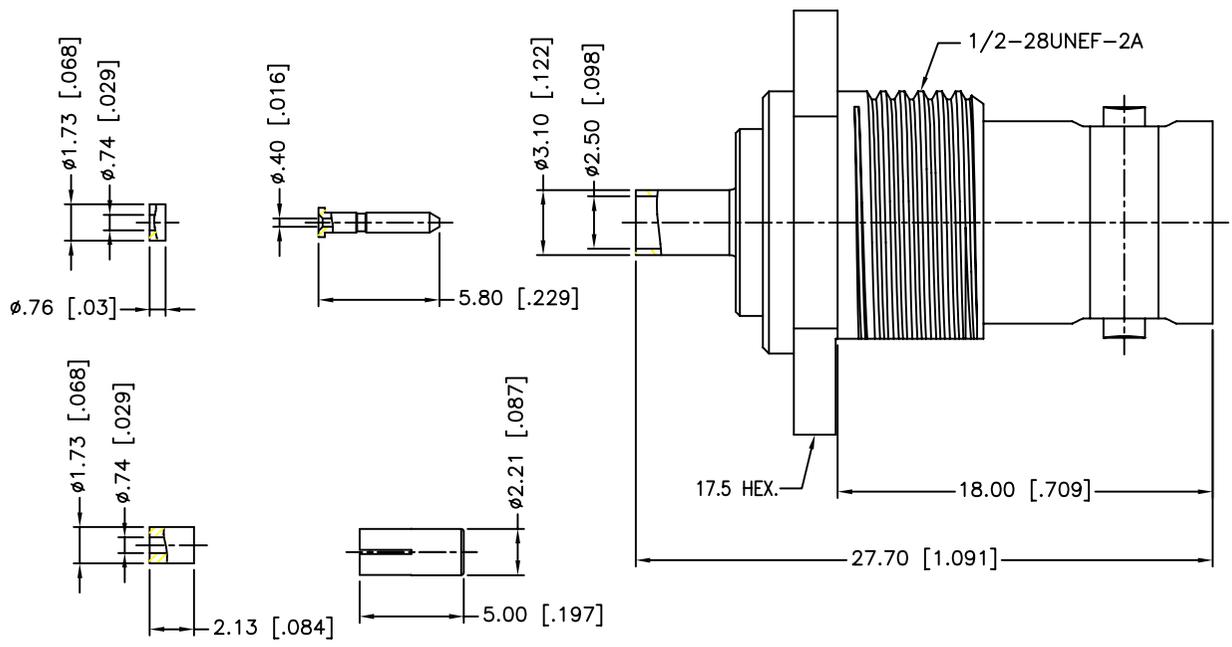

1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
2. SOLDER CENTER CONTACT

12	INNER FERRULE	BRASS	NICKEL	1
11	SLEEVE	BRASS	NICKEL	1
10	INSULATOR	PTFE	NATURAL	1
9	CONTACT PIN	BRASS	GOLD	1
8	HEX NUT	BRASS	NICKEL	1
7	LOCK WASHER	BRASS	NICKEL	1
6	GASKET	RUBBER	RED	1
5	BARREL	BRASS	NICKEL	1
4	BODY	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 ± 0.007"
.315 - 1.180 ± 0.015"
1.180 - 4.724 ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN S.XIE	04/07/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/112750.DWG

Amphenol Connex

PART DESCRIPTION
BNC BULKHEAD CRIMP JACK(FOR 1.13mm CABLE)

PART NO.
112750

DWG. NO. 112750.DWG REV. NC SIZE A SCALE NA