



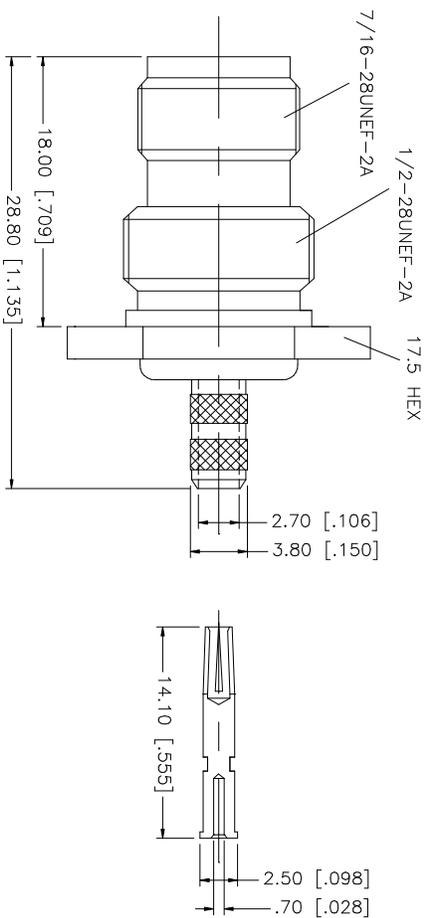
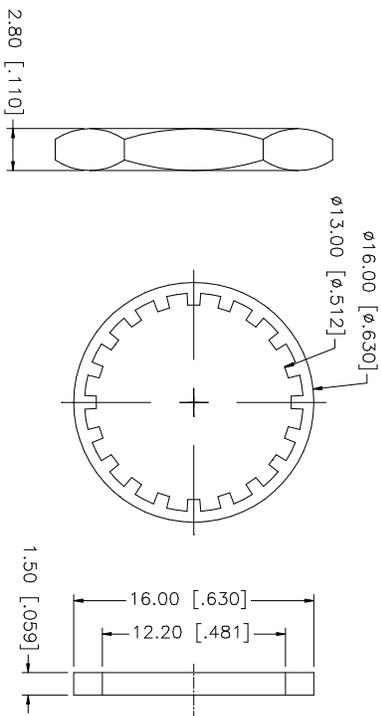


REV.	DATE	DESCRIPTION
NC	01/24/03	INITIAL RELEASE

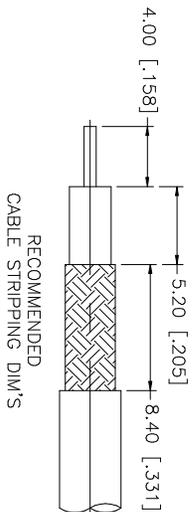

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.002" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	DO NOT SCALE DRAWING	CAD FILE C:/122/122192-13.DWG	DWG. NO. 122192-13.DWG	REV. NC	SIZE A	SCALE NA
8	SLEEVE	DELRIN	NATURAL	1							
7	CONTACT PIN	PHOS. BRONZE	GOLD	1							
6	HEX NUT	BRASS	NICKEL	1							
5	LOCK WASHER	BRASS	NICKEL	1							
4	GASKET	RUBBER	RED	1							
3	BARREL	BRASS	NICKEL	1							
2	INSULATOR	DELRIN	NATURAL	1							
1	HOUSING/BODY	BRASS	NICKEL	1							
DESCRIPTION		MATERIAL		FINISH	QTY						
		APPROVALS		DATE							
		DRAWN G.R.S.		01/24/03							
		CHECKED									
		ISSUED									
		SHEET 1 OF 1									
		PART NO. 122192-13									
		PART DESCRIPTION TNC BULKHEAD CRIMP JACK (RG 174/U, 316/U CABLE, SPECIAL FERRULE)									
		Amphenol Connex									