








REV.	DATE	ECR NO.	DESCRIPTION
NC	06/24/03	XXXXXX	INITIAL RELEASE
A	06/25/13	2486	CORRECT CONTACT PIN LENGTH, UPDATE FORMAT, ADD ELECTRICAL/MECHANICAL NOTES

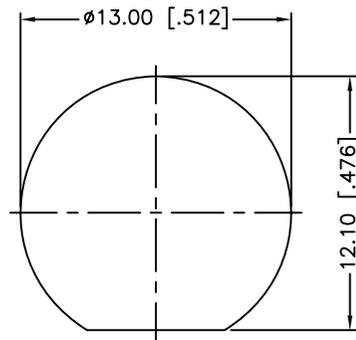

RECOMMENDED MOUNTING HOLE

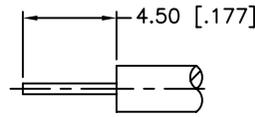

RECOMMENDED CABLE STRIPPING DIM'S

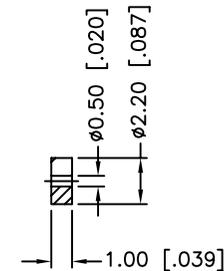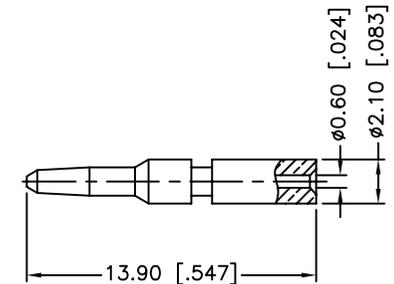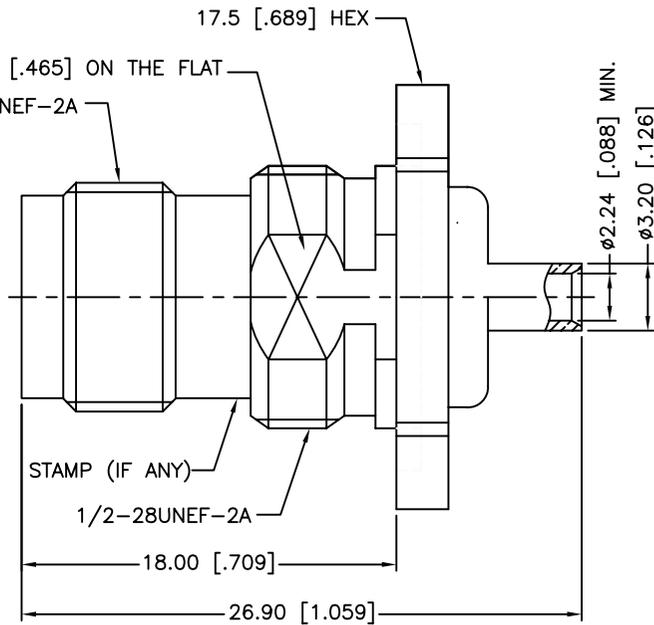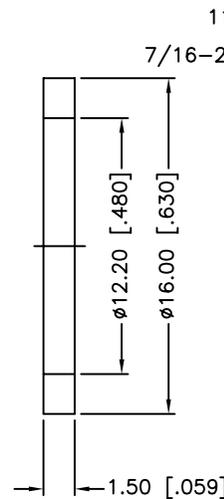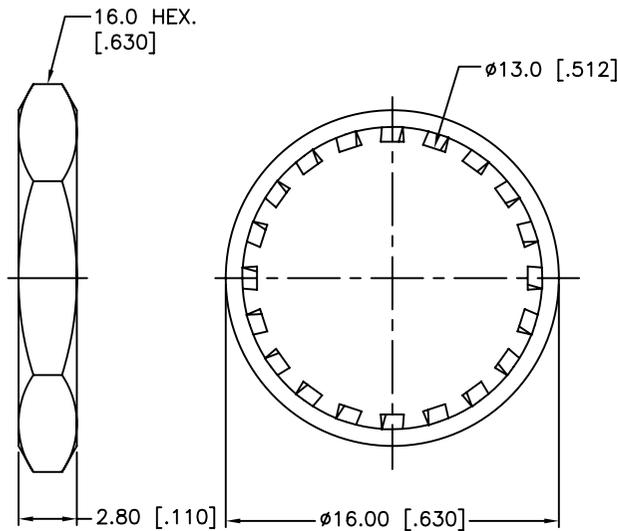

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0-4 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C
6. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .068"
7. MAX. PANEL THICKNESS=3.5mm

QTY	DESCRIPTION	MATERIAL	FINISH	QTY
1	HOUSING	BRASS	NICKEL	1
2	BODY	BRASS	NICKEL	1
3	INSULATOR	PTFE	NATURAL	1
4	BARREL	BRASS	GOLD	1
5	CONTACT PIN	BRASS	GOLD	1
6	INSULATOR	PTFE	NATURAL	1
7	GASKET	SILICONE RUBBER	RED	1
8	LOCK WASHER	BRASS	NICKEL	1
9	HEX NUT	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
 TOLERANCES FOR MILLIMETERS ARE:
 <0.5 ± 0.05mm
 0.5 - 6mm ± 0.10mm
 6 - 30mm ± 0.20mm
 30 - 120mm ± 0.30mm
 ANGLES ± 1°
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 <.020 ± 0.002"
 .020 - .236 ± 0.004"
 .236 - 1.180 ± 0.007"
 1.180 - 4.724 ± 0.012"
 ANGLES ± 1°
 DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/25/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/122400RP.DWG	

Amphenol Connex			
PART DESCRIPTION TNC REVERSE BULKHEAD DIRECT SOLDER JACK (FOR .085", .086" CABLE)			
PART NO. 122400RP			
DWG. NO.	122400RP.DWG	REV.	A
SIZE	A	SCALE	NA