




REV.	DATE	ECR NO.	DESCRIPTION
NC	09/15/10	XXXXXX	INITIAL RELEASE

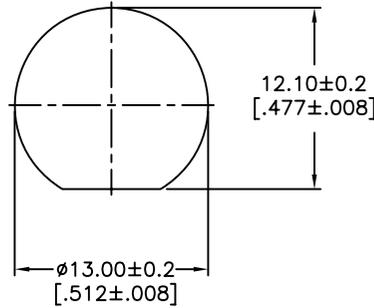




RECOMMENDED MOUNTING HOLE

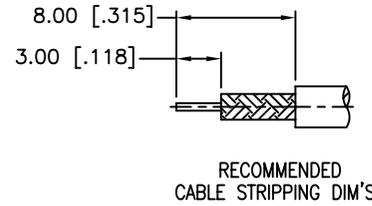

RECOMMENDED CABLE STRIPPING DIM'S

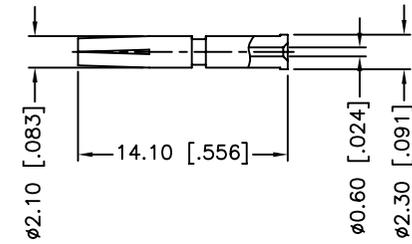

MOUNTING HOLE

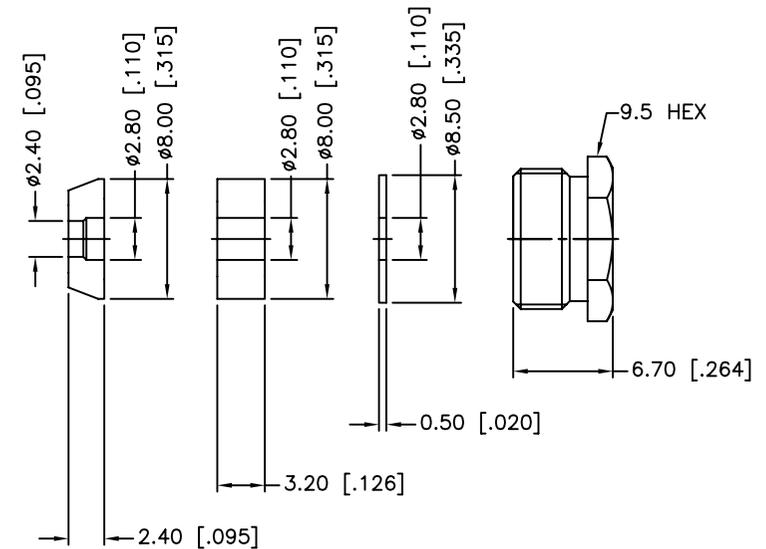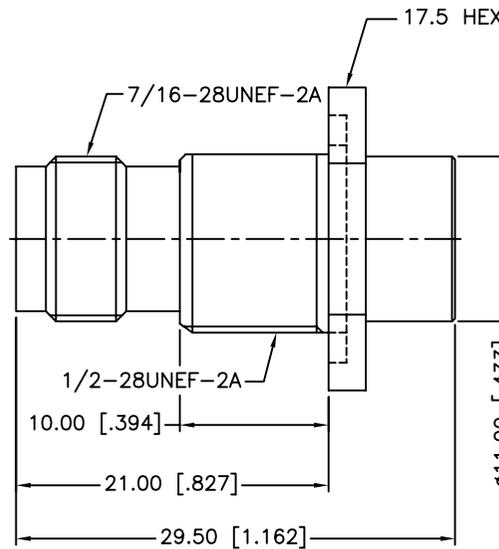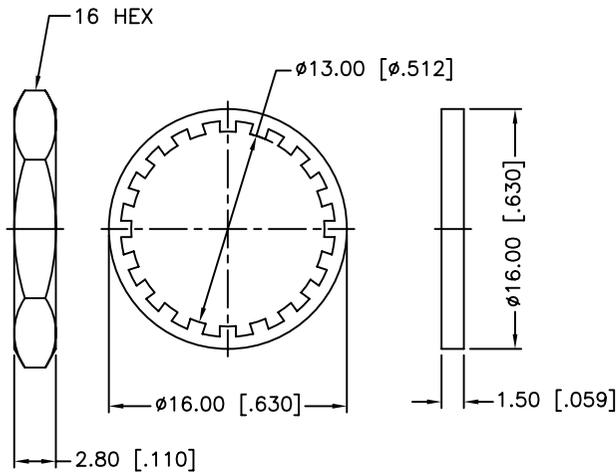

NOTE:
1. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

QTY	DESCRIPTION	MATERIAL	FINISH
1	HEX NUT	BRASS	NICKEL
1	WASHER	BRASS	NICKEL
1	GASKET	SILICONE	RED
1	CONTACT PIN	PHOSPHOR BRONZE	GOLD
1	HEX NUT	BRASS	NICKEL
1	WASHER	BRASS	NICKEL
1	GASKET	SILICONE	RED
1	TAP HAT	BRASS	NICKEL
1	HOUSING	BRASS	NICKEL
1	INSULATOR	PTFE	NATURAL
1	BODY	BRASS	NICKEL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 ± ± 0.007"
.315 - 1.180 ± ± 0.015"
1.180 - 4.724 ± ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	09/15/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/122452.DWG	

PART DESCRIPTION			
Amphenol Connex			
TNC BULKHEAD CLAMP JACK (FOR RG-174/U,188A/U,316/U)			
PART NO. 122452			
DWG. NO.	122452.DWG	REV. NC	SCALE NA