


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/15/10	XXXXXX	INITIAL RELEASE

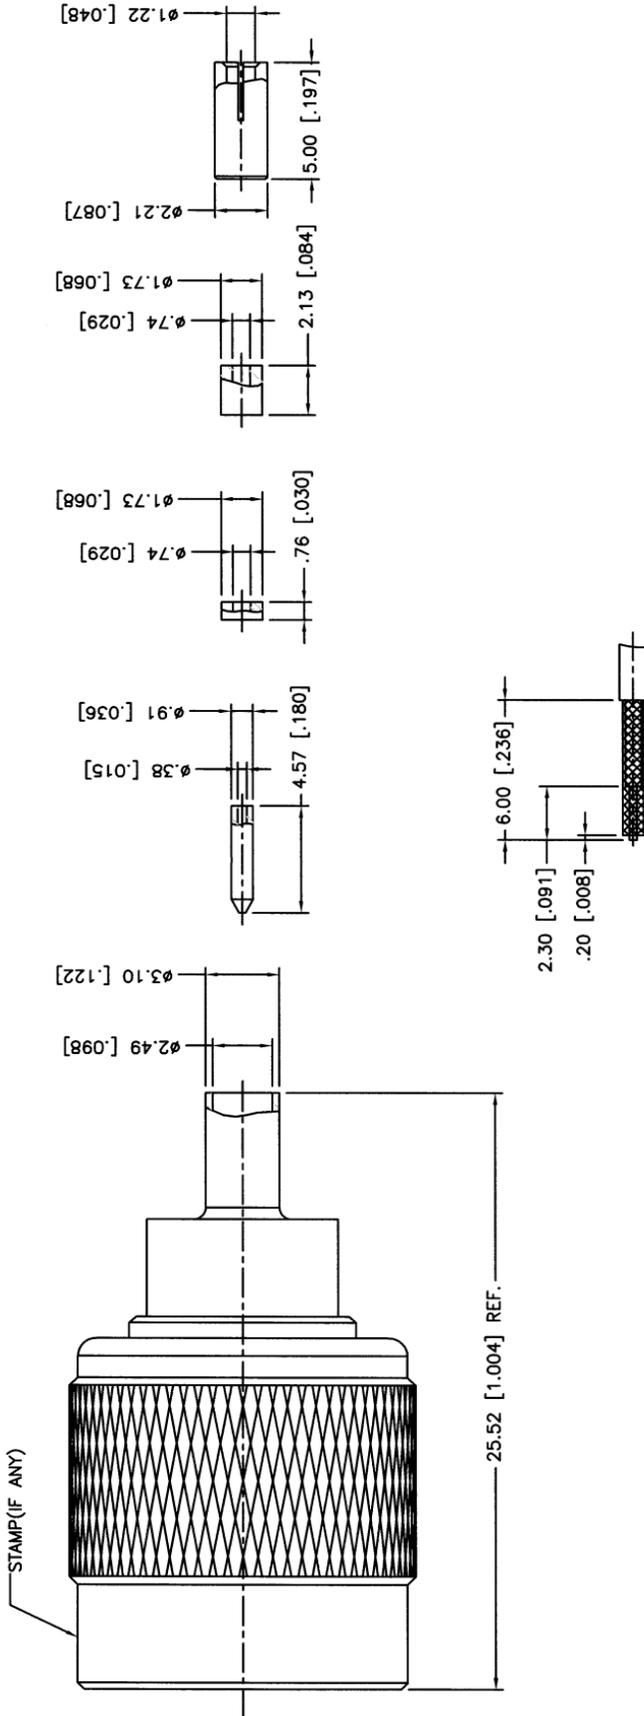

NOTES:  
 1. CRIMPED FERRULE  
 HEX CRIMP SIZE .105"  
 2. SOLDER CENTER CONTACT

RECOMMENDED  
 CABLE STRIPPING DIM'S

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	INSULATOR
1	NICKEL	BRASS	SLEEVE
1	NICKEL	BRASS	INNER FERRULE
1	NICKEL	BRASS	CONTACT PIN
1	NICKEL	BRASS	WASHER
1	NICKEL	BRASS	RETAINER RING
1	NICKEL	BRASS	GASKET
1	NICKEL	BRASS	INSULATOR
1	NICKEL	BRASS	CONTACT PIN
1	NICKEL	BRASS	WASHER
1	NICKEL	BRASS	RETAINER RING
1	NICKEL	BRASS	CONTACT PIN
1	NICKEL	BRASS	INSULATOR
1	NICKEL	BRASS	SLEEVE
1	NICKEL	BRASS	INNER FERRULE

# Amphenol Connex

TNC PLUG FOR 1.13MM CABLE

PART DESCRIPTION

122517

122517.DWG

C:/CONNEX/122517.DWG

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.  
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm ± 0.20mm  
 8 - 30mm ± 0.40mm  
 30 - 120mm ± 0.50mm  
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 = ± 0.007"  
 .315 - 1.180 = ± 0.015"  
 1.180 - 4.724 = ± 0.020"