

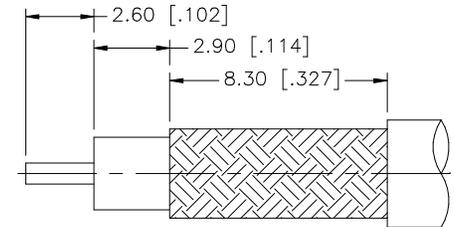
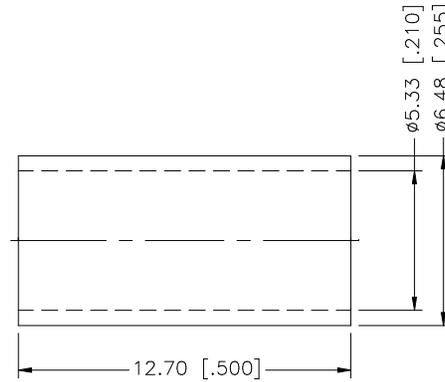


REV.	DATE	DESCRIPTION
A	01/23/04	UPDATE DRAWING FORMAT

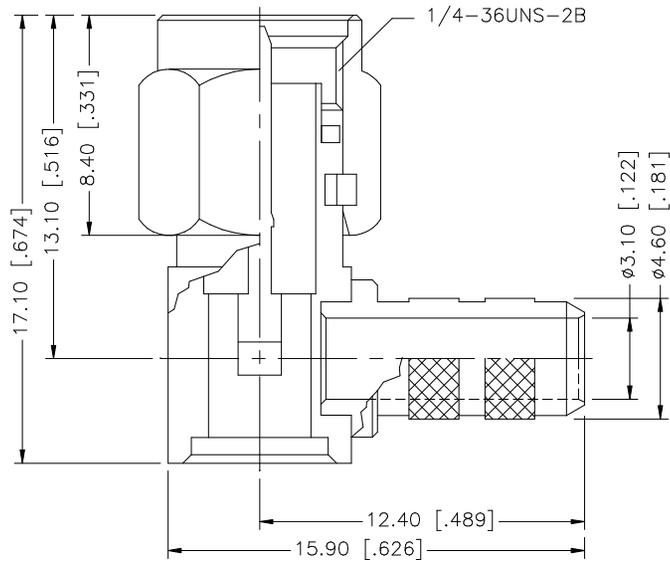

RECOMMENDED  
CABLE STRIPPING DIM'S



NOTE:

1. CRIMPED FERRULE  
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.	REV.	SIZE	SCALE
8									
7									
6									
5	FERRULE	COPPER	GOLD	1					
4	COVER	STAINLESS STEEL	GOLD	1					
3	CONTACT PIN	BRASS	GOLD	1					
2	INSULATOR	TEFLON	NATURAL	1					
1	HOUSING W/ BARREL	STAINLESS STEEL	GOLD	1					
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  0.5 - 8mm ± 0.20mm  8 - 30mm ± 0.40mm  30 - 120mm ± 0.50mm</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  .020 - .315 = ± 0.007"  .315 - 1.180 = ± 0.015"  1.180 - 4.724 = ± 0.020"</small>					APPROVALS DRAWN G.R.S. CHECKED ISSUED SHEET 1 OF 1	DATE 01/23/04	<h1 style="color: blue;">Amphenol Connex</h1>		
					PART DESCRIPTION SMA R/A CRIMP PLUG (FOR RG-58C/U, 58/U CABLE)				
					PART NO. 132122SS				
					C:/132/132122SS.DWG	132122SS.DWG	REV. A	SIZE A	SCALE NA