
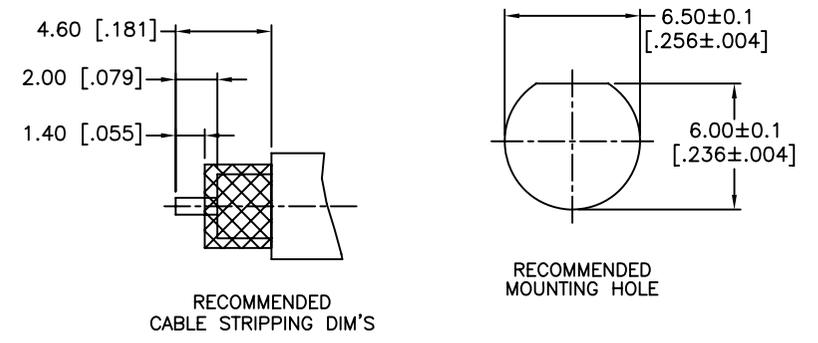
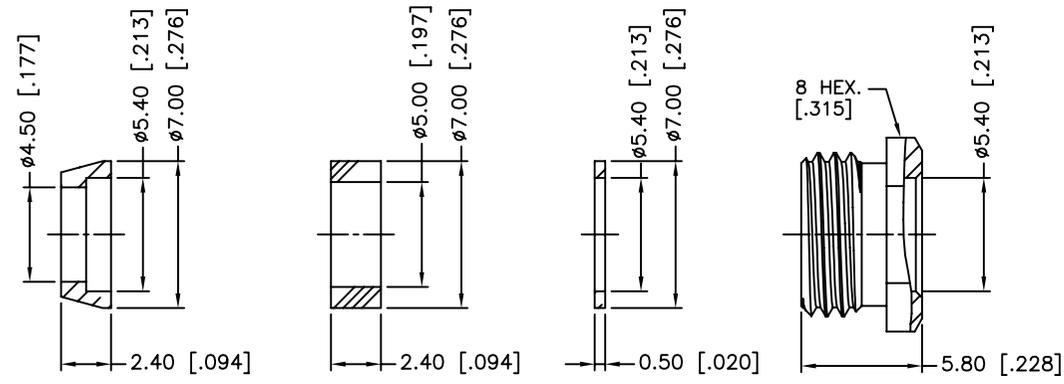
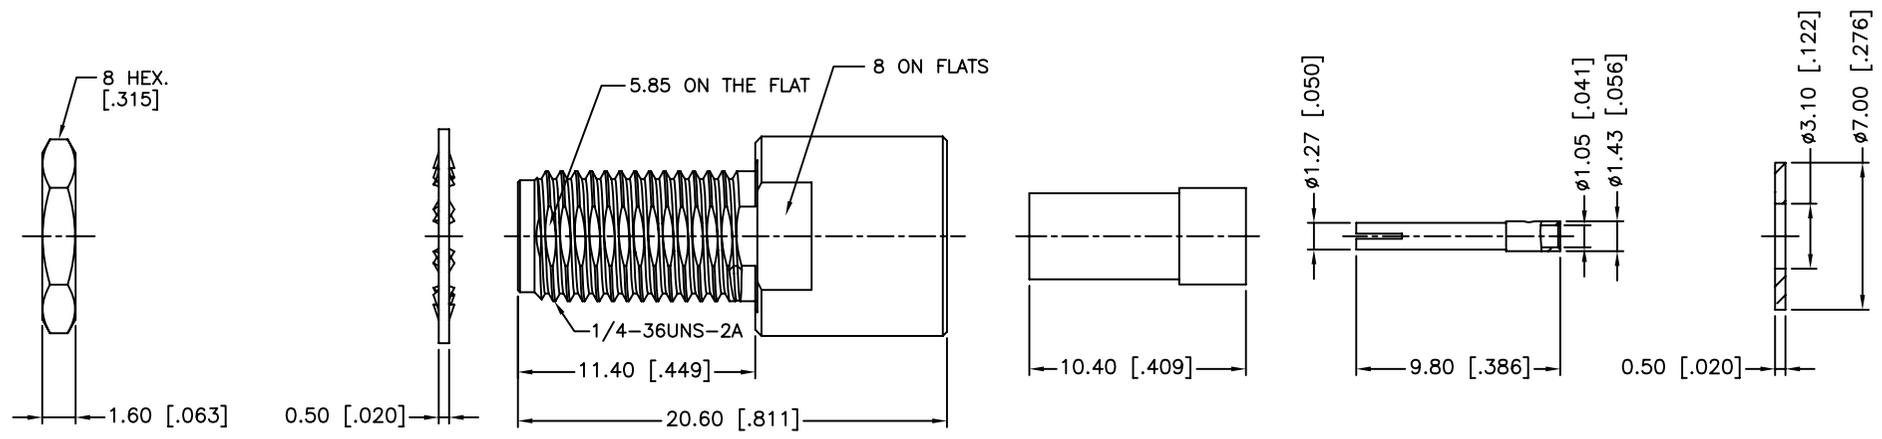


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/29/11	XXXXXX	INITIAL RELEASE



1. IMPEDANCE: 50 OHM
2. REQUENCY RANGE: 0-12.4 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 100 CYCLES MIN.

10	HEX NUT	BRASS	GOLD	1
9	LOCK WASHER	BRASS	GOLD	1
8	HEX NUT	BRASS	GOLD	1
7	WASHER	BRASS	GOLD	1
6	GASKET	SILICONE	RED	1
5	TOP HAT	BRASS	GOLD	1
4	WASHER	BRASS	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE
	DRAWN M.ZHANG	06/29/11
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	CHECKED	
	ISSUED	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"	SHEET	1 OF 1
	CAD FILE	C:/CONNEX/132129.DWG
DO NOT SCALE DRAWING		

Amphenol Connex			
PART DESCRIPTION SMA BULKHEAD CLAMP JACK (FOR RG-58/U CABLE)			
PART NO.		132129	
DWG. NO.	132129.DWG	REV.	NC
SIZE	A	SCALE	NA