

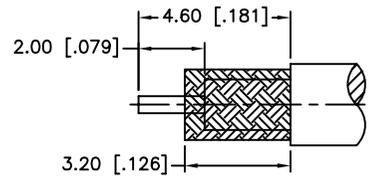
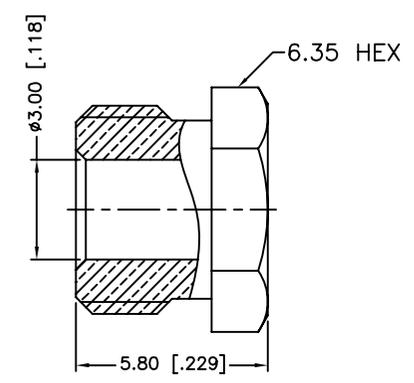
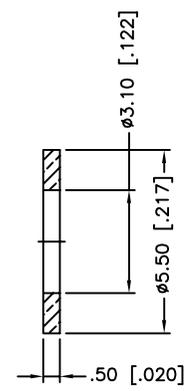
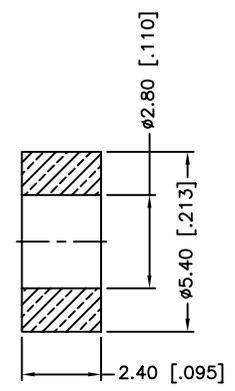
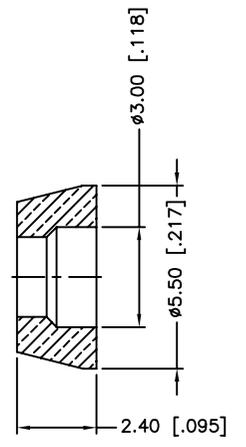
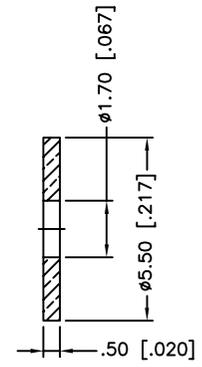
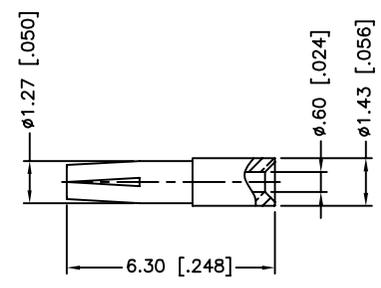


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/08/09	XXXXXX	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

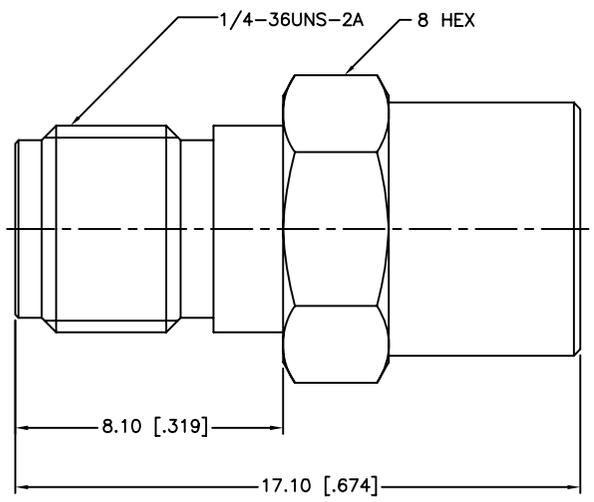

8	HEX NUT	BRASS	GOLD	1
7	WASHER	BRASS	GOLD	1
6	GASKET	SILICONE	RED	1
5	TOP HAT	BRASS	GOLD	1
4	WASHER	BRASS	GOLD	1
3	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm \pm 0.20mm
8 - 30mm \pm 0.40mm
30 - 120mm \pm 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = \pm 0.007"
.315 - 1.180 = \pm 0.015"
1.180 - 4.724 = \pm 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN T.DENG	12/08/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	
C:/CONNEX/132126.DWG	

Amphenol Connex

PART DESCRIPTION
**SMA CLAMP JACK
(FOR RG-174/U,188A/U,316/U)**

PART NO. **132126**

DWG. NO. 132126.DWG REV. NC SIZE A SCALE NA