

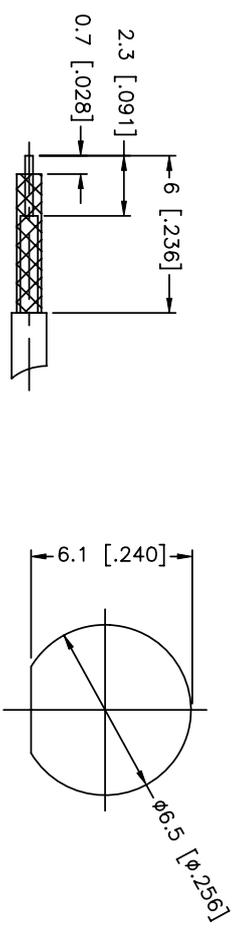
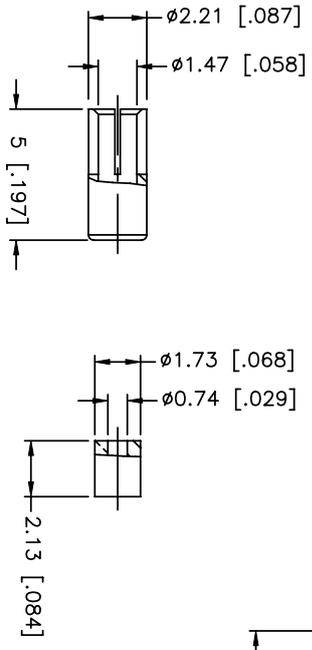


REV.	DATE	ECR NO.	DESCRIPTION
NC	23/12/10	XXXXXX	INITIAL RELEASE
2	10/01/11	XXXXXX	7.6 HEX. WAS 8 HEX.

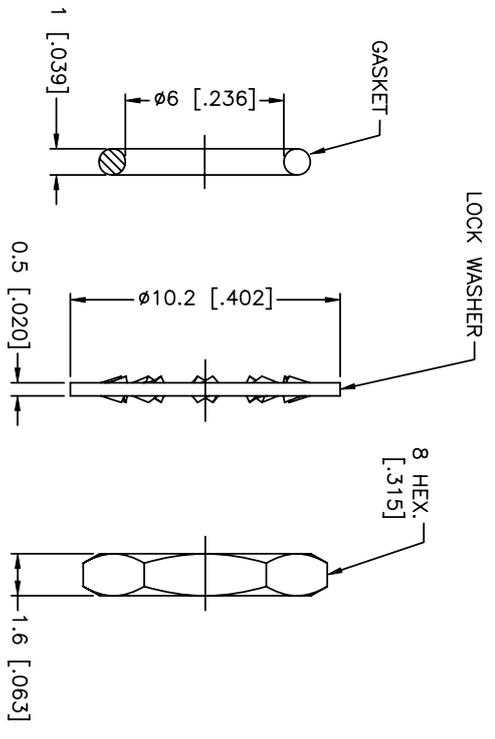

RECOMMENDED  
CABLE STRIPPING DIM'S

RECOMMENDED  
MOUNTING HOLE

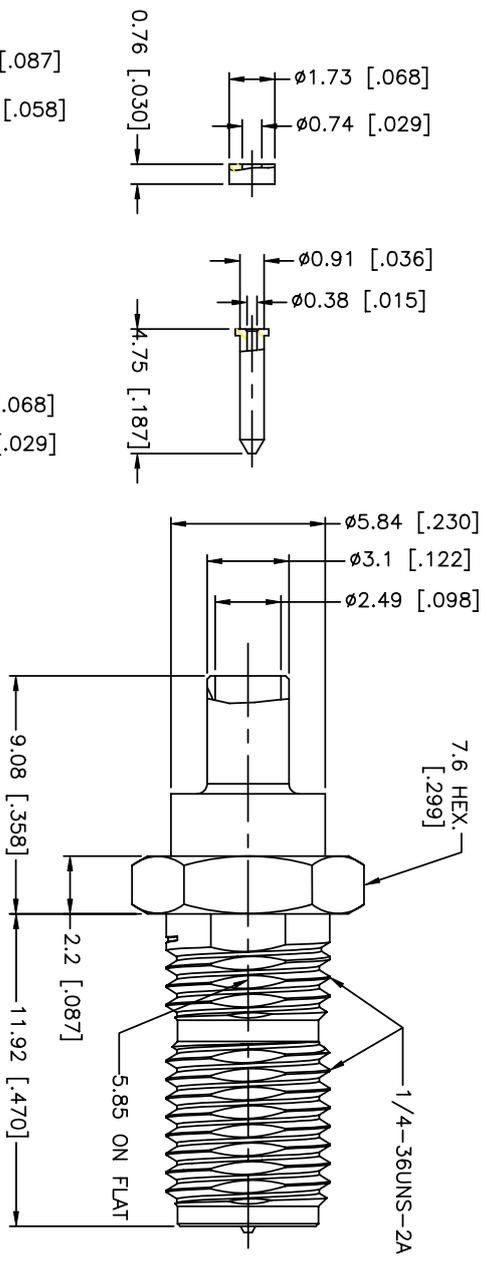

NOTE:  
1. CRIMPED FERRULE  
HEX CRIMP SIZE .105"  
2. CONTACT PIN TO SOLDER  
3. MAX.PANEL THICKNESS=0.93mm

DESCRIPTION	MATERIAL	FINISH	QTY
10 HEX NUT	BRASS	GOLD	1
9 LOCK WASHER	BRASS	GOLD	1
8 GASKET	SILICONE	RED	1
7 INNER FERRULE	BRASS	GOLD	1
6 SLEEVE	BRASS	GOLD	1
5 INSULATOR	PTE	NATURAL	1
4 CONTACT PIN	BRASS	GOLD	1
3 CONTACT PIN	BER. COPPER	GOLD	1
2 INSULATOR	PTE	NATURAL	1
1 BODY	BRASS	GOLD	1

APPROVALS	DATE
F. WANG	10/01/11

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

CAD FILE C:/CONNEX/132389RP-10.DWG

DWG. NO. 132389RP-10.DWG

REV. 2

SIZE A

SCALE NA

PART NO. RP-SMA BULKHEAD CRIMP JACK (FOR 1.32 MM CABLE)

# Amphenol Connex