

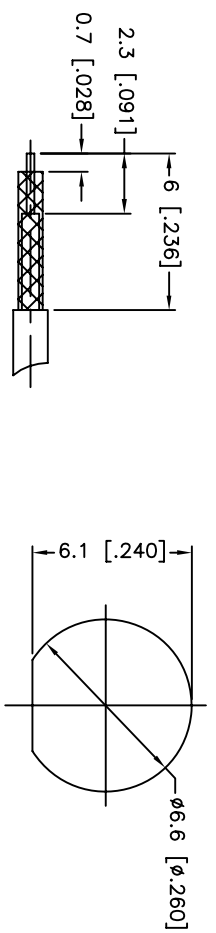


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/22/09	XXXXXX	INITIAL RELEASE

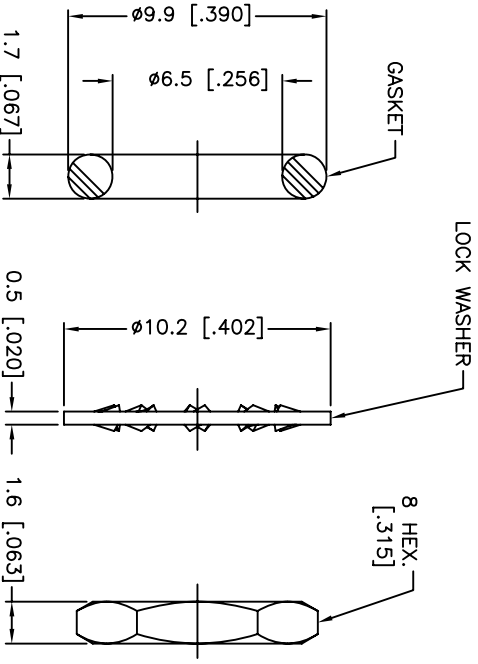

RECOMMENDED
CABLE STRIPPING DIM'S

RECOMMENDED
MOUNTING HOLE

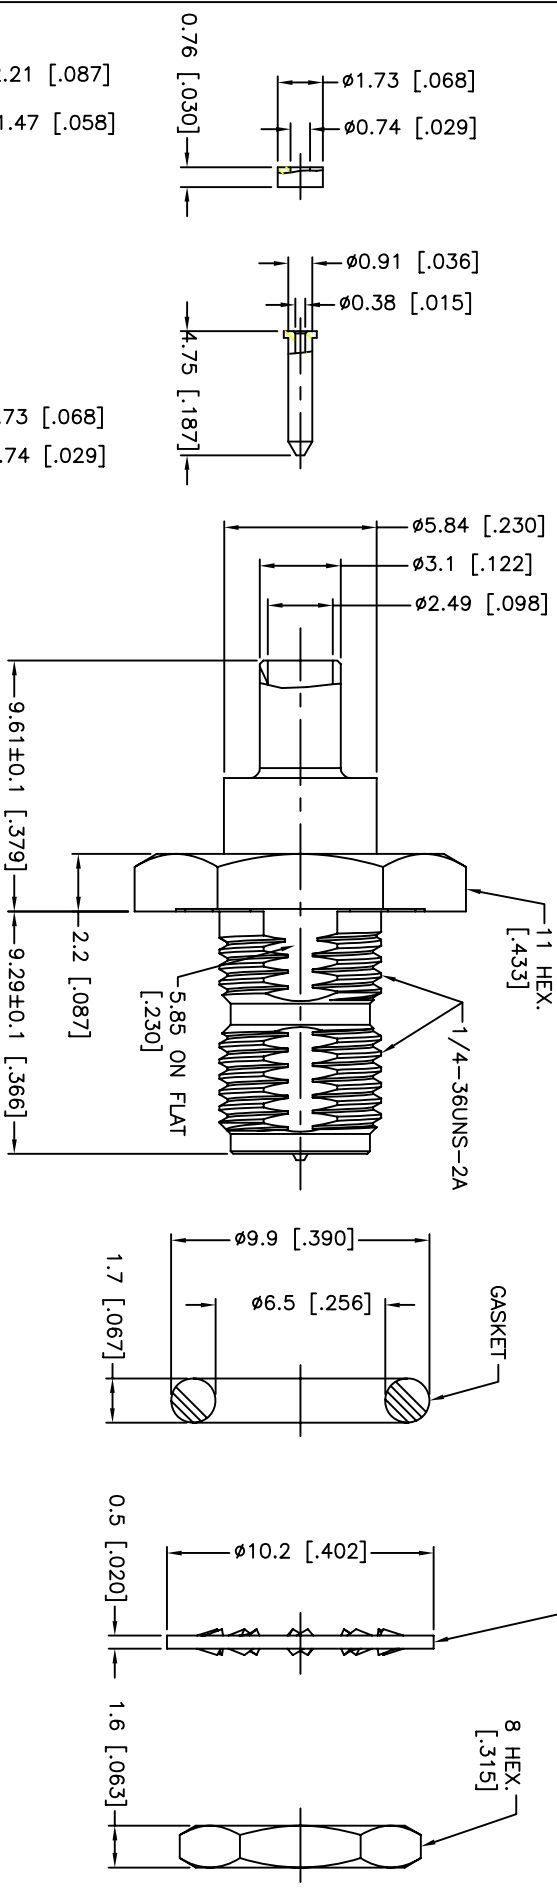

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
2. CONTACT PIN TO SOLDER
3. MAX.PANEL THICKNESS=0.93mm

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BRASS	HEX NUT
1	GOLD	BRASS	LOCK WASHER
1	RED	SILICONE	GASKET
1	GOLD	BRASS	INNER FERRULE
1	GOLD	BRASS	SLEEVE
1	NATURAL	PTE	INSULATOR
1	GOLD	BRASS	CONTACT PIN
1	GOLD	BER. COPPER	CONTACT PIN
1	NATURAL	PTE	INSULATOR
1	GOLD	BRASS	BODY

APPROVALS	DATE
M.ZHANG	05/22/09

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 ± ± 0.007"
.315 - 1.180 ± ± 0.015"
1.180 - 4.724 ± ± 0.020"

DO NOT SCALE DRAWING

Amphenol Connex

RP-SMA BULKHEAD CRIMP JACK
(FOR 1.32 MM CABLE)

132389RP

APPROVALS: M.ZHANG, DATE: 05/22/09

C:/CONNEX/132389RP.DWG