



REV.	DATE	DESCRIPTION
NC	02/12/00	INITIAL RELEASE
A	11/01/05	UPDATE DRAWING FORMAT, MODIFY CONTACT PIN

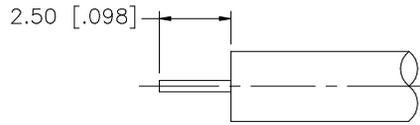

RECOMMENDED  
CABLE STRIPPING DIM'S

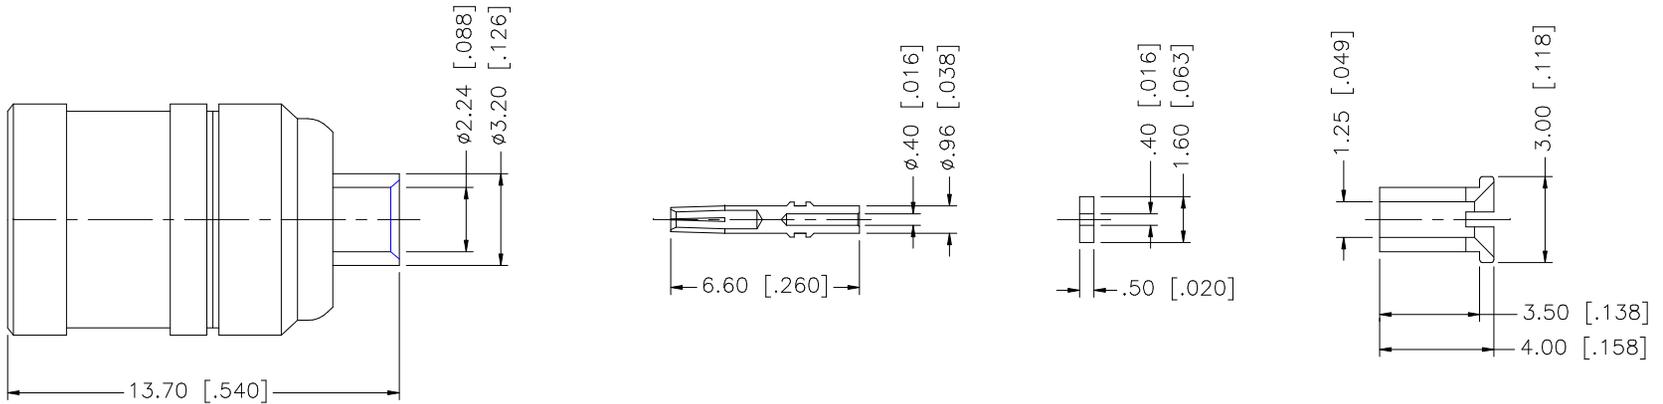

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<b>Amphenol Connex</b>						
8					DRAWN	G.R.S.					11/01/05	PART DESCRIPTION <b>SMB DIRECT SOLDER PLUG (FOR .047" SEMI RIGID CABLE)</b>	
7					CHECKED			PART NO. <b>142224</b>					
6					ISSUED							DWG. NO. 142224.DWG	
5	SOLDER BARREL	BRASS	GOLD	1	SHEET	1 OF 1		REV.	A	SIZE	A		
4	INSULATOR	TEFLON	NATURAL	1	CAD FILE C:/142/142224.DWG								
3	CONTACT PIN	BER. COPPER	GOLD	1									DO NOT SCALE DRAWING
2	INSULATOR	TEFLON	NATURAL	1									
1	BODY	BRASS	GOLD	1									

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"