

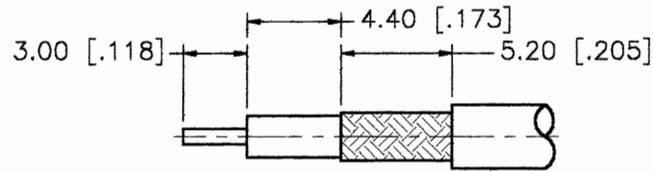
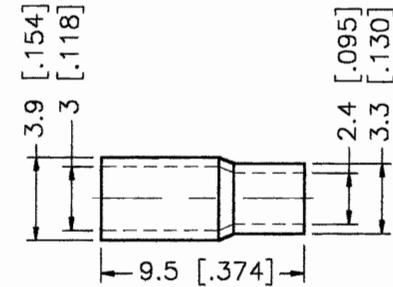


REV.	DATE	DESCRIPTION
NC	03/07/00	INITIAL RELEASE

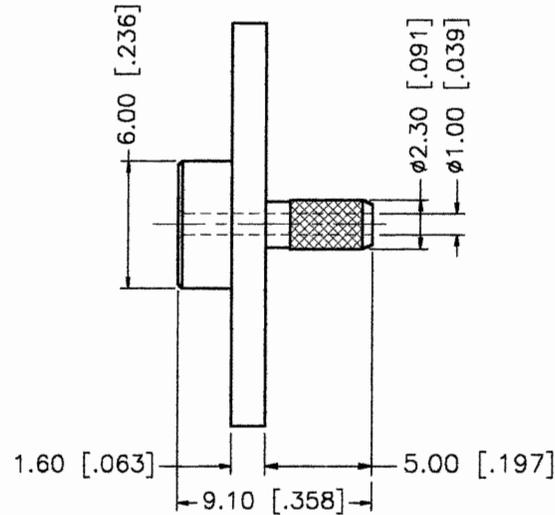

RECOMMENDED  
CABLE STRIPPING DIMS.

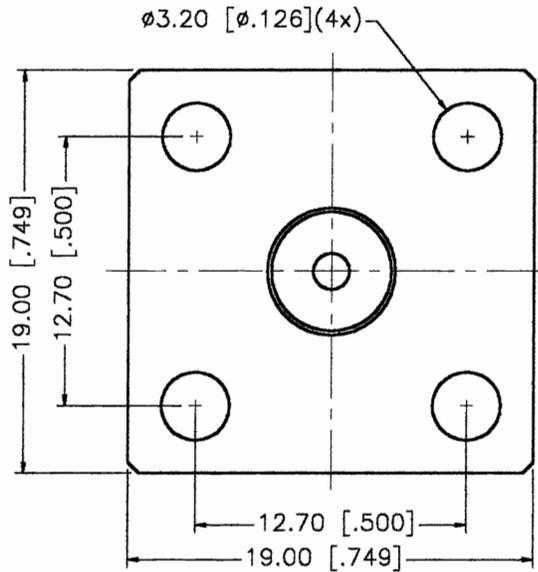

CRIMP NOTES:  
1. CRIMPED FERRULE  
HEXCRIMP SIZE .128"

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE				
7				DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.				03/07/00
6				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	CHECKED			TITLE	PANEL MOUNT CABLE TERMINATION (FOR RG-178B/U, 196A/U CABLE)	
5				0.5-6 = ± 0.2	ISSUED			SIZE	FSCM NO.	DWG. NO.
4				6-30 = ± 0.4				A	99001	142282.DWG
3	FERRULE	BRASS	NICKEL	30-120 = ± 0.6				SCALE	NA	PART NO.
2	FLANGE	BRASS	NICKEL	120-315 = ± 1				142282		SHEET
1	BODY	BRASS	NICKEL	315-1000 = ± 1.6				1 OF 1		
	DESCRIPTION	MATERIAL	FINISH	1000-2000 = ± 2.4	DO NOT SCALE DRAWING					