
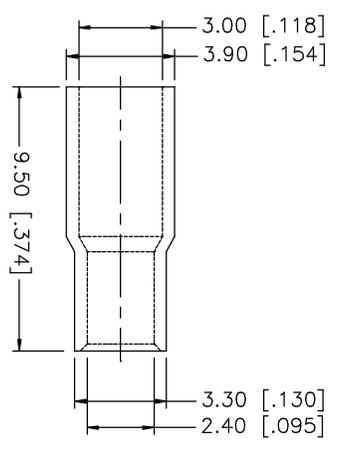
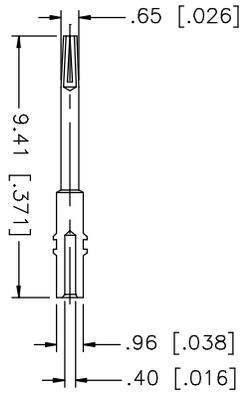
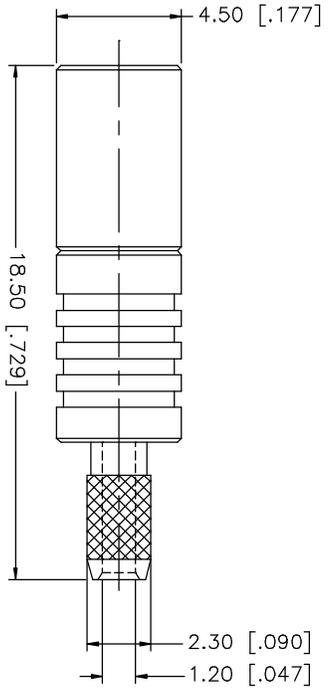


REV.	DATE	DESCRIPTION
NC	06/09/03	INITIAL RELEASE

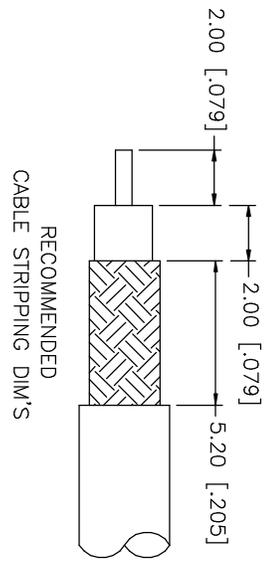

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CENTER CONTACT TO SOLDER

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.	REV.	SIZE	SCALE	
4 FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	C:/143/143104.DWG	DWG. NO.	REV.	SIZE	SCALE	
3 INSULATOR	TEFLON	NATURAL	1		APPROVALS	DATE	143104.DWG	NC	A	NA
2 CONTACT PIN	BER. COPPER	GOLD	1		DRAWN	G.R.S.	06/09/03			
1 BODY	BRASS	GOLD	1		CHECKED					
PART DESCRIPTION				ISSUED						
SMB CRIMP PLUG (FOR RG-178A/U, 196A/U CABLE)				SHEET	1 OF 1					
PART NO.										
143104										

Amphenol Connex