









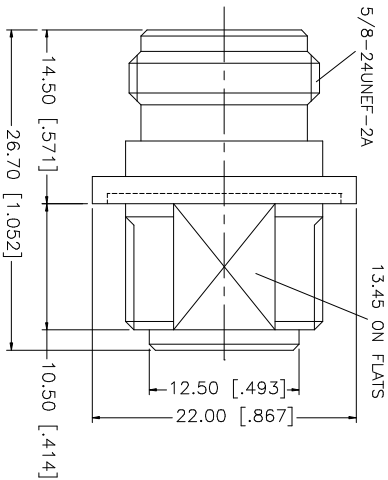


REV.	DATE	DESCRIPTION
A	06/08/04	UPDATE DRAWING FORMAT

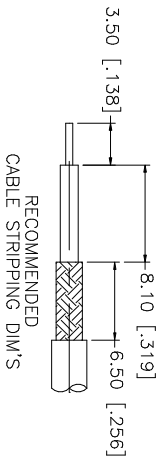

RECOMMENDED
MOUNTING HOLE

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS = 6.4mm

HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS	DATE	Amphenol Connex PART DESCRIPTION N FRONT BULKHEAD CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)			
LOCK WASHER	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN	G.R.S.		06/08/04		
GASKET	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		CHECKED					
FERRULE	COPPER	NICKEL	1			ISSUED					
HEX NUT	BRASS	NICKEL	1			SHEET	1 OF 1				
INSULATOR	TEFLON	NATURAL	1								
CONTACT PIN	PHOS. BRONZE	GOLD	1								
INSULATOR	TEFLON	NATURAL	1								
BODY	BRASS	NICKEL	1								
DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE					
						C:/172/172221.DWG	DWG. NO.	172221.DWG	REV. A	SIZE A	SCALE NA