
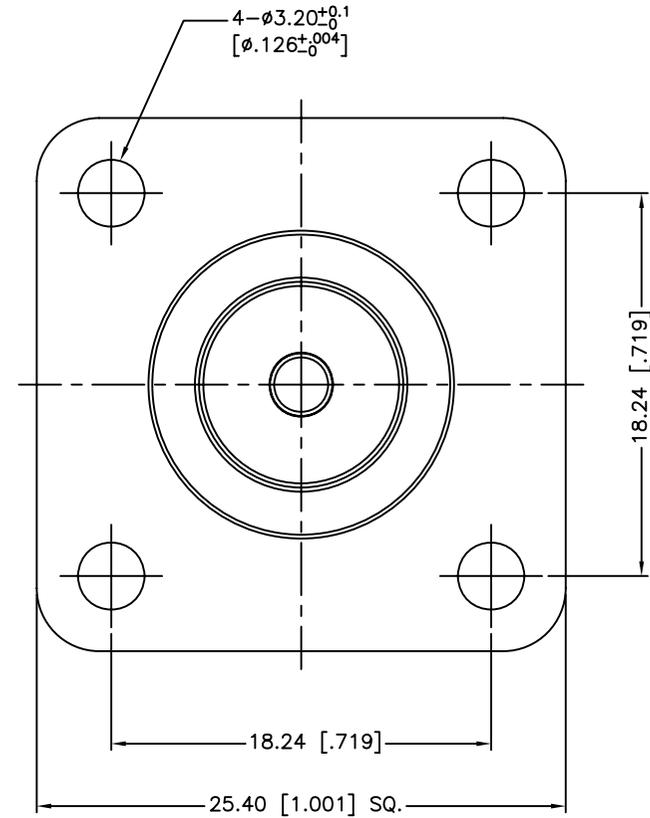
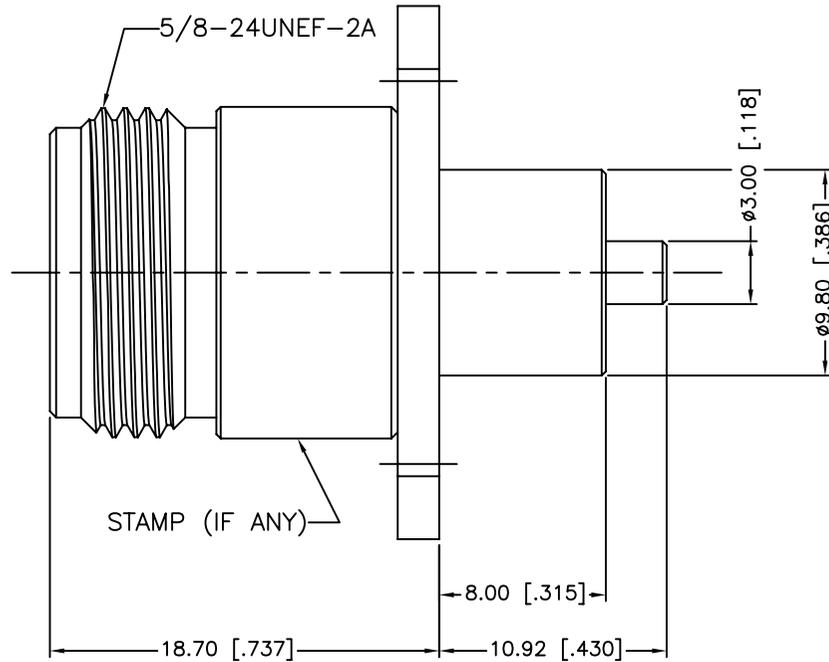


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/02/04	---	INITIAL RELEASE
A	02/12/04	---	MODIFY BODY LENGTH
B	07/12/12	2341	UPDATE DRAWING FORMAT



1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC-11GHZ
3. VSWR(RETURN LOSS): 1.3, MAX.
4. DIELECTRIC WITHSTAND VOLTAGE: 2500 VRMS,MIN
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE:-65°C TO +165°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.12mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 ± 0.005"
.315 - 1.180 ± 0.015"
1.180 - 4.724 ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	M.ZHANG	07/12/12
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/CONNEX/172228-20.DWG	

Amphenol Connex

PART DESCRIPTION			
N PANEL RECEPTACLE JACK (EXTENDED PTFE/CONTACT .315"-.430")			
PART NO.			
172228-20			
DWG. NO.	172228-20.DWG	REV.	B
SIZE	A	SCALE	NA

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	PHOSPHOR BRONZE	CONTACT PIN
1	NATURAL	PTFE	INSULATOR
1	NEXCOTE	BRASS	OUTER BODY WITH PANEL