

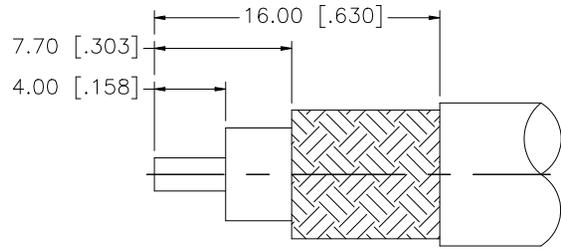
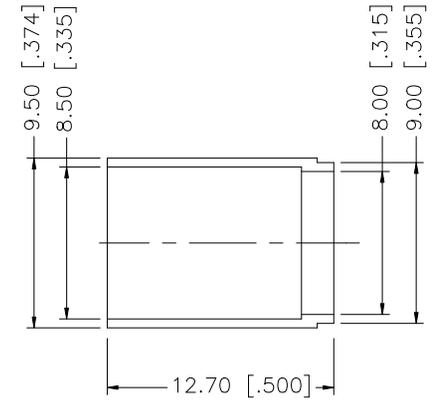


REV.	DATE	DESCRIPTION
NC	03/22/07	INITIAL RELEASE

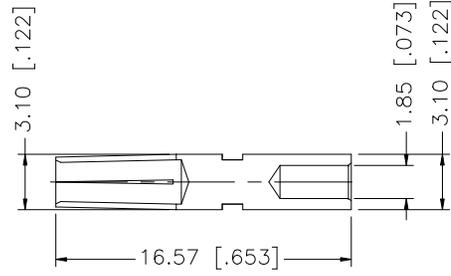

RECOMMENDED
CABLE STRIPPING DIM'S

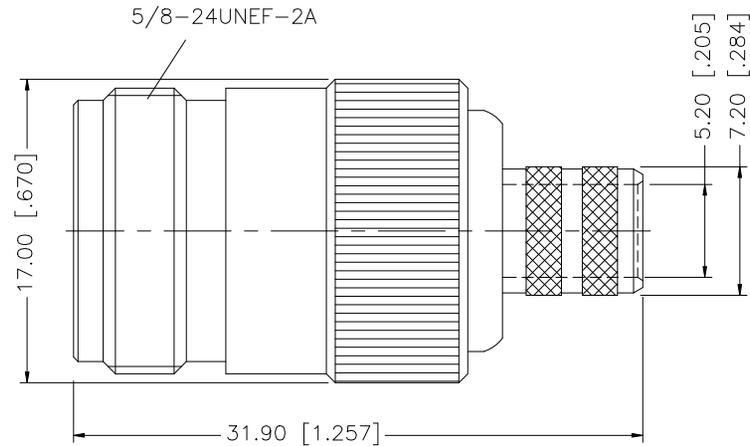

CRIMP NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .324"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100"

8				<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:</small> 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:</small> .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	<h1 style="color: blue;">Amphenol Connex</h1>		
7					DRAWN	G.R.S.		03/22/07	
6					CHECKED				
5					ISSUED				
4	FERRULE	COPPER	NEXCOTE		1	PART DESCRIPTION		N CRIMP JACK (FOR TIMES LMR-300 CABLE)	
3	CONTACT PIN	PHOS. BRONZE	GOLD		1	PART NO.			172335
2	INSULATOR	TEFLON	NATURAL		1	SHEET		1 OF 1	
1	BODY	BRASS	NEXCOTE		1	CAD FILE		C:/172/172335.DWG	
DESCRIPTION MATERIAL FINISH QTY				DWG. NO.		172335.DWG	REV. NC	SIZE A	SCALE NA