

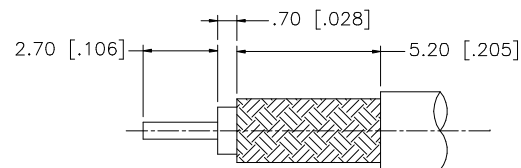
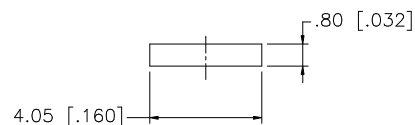

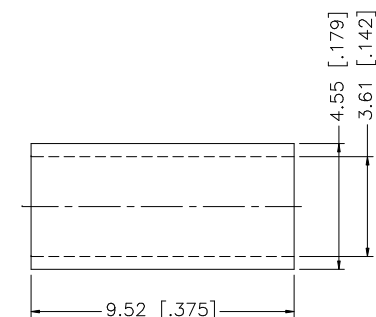


REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT
B	03/01/04	MODIFY DESCRIPTION - RG-179/U

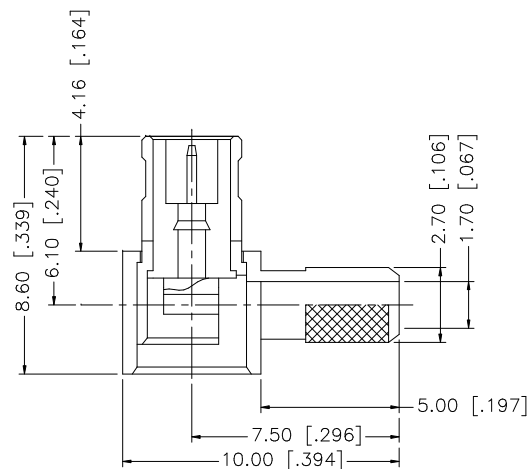

RECOMMENDED
CABLE STRIPPING DIM'S



NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex												
8						DRAWN	G.R.S.							03/01/04						
7						CHECKED									PART DESCRIPTION					
6	FERRULE	COPPER	GOLD	1			ISSUED		MCX R/A CRIMP PLUG (FOR RG-179/U DOUBLE BRAID)											
5	COVER	BRASS	GOLD	1			SHEET	1 OF 1		PART NO.										
4	INSULATOR	DELTRIN	NATURAL	1						252119-75										
3	CONTACT PIN	BRASS	GOLD	1			CAD FILE			DWG. NO.				252119-75.DWG	REV.	B	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL	1						C:/252/252119-75.DWG										
1	BODY	BRASS	GOLD	1																
	DESCRIPTION	MATERIAL	FINISH	QTY																