
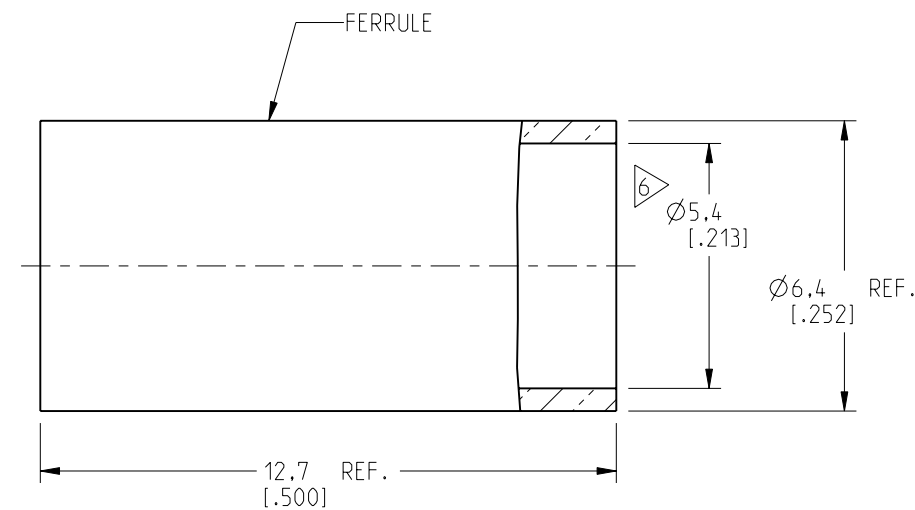
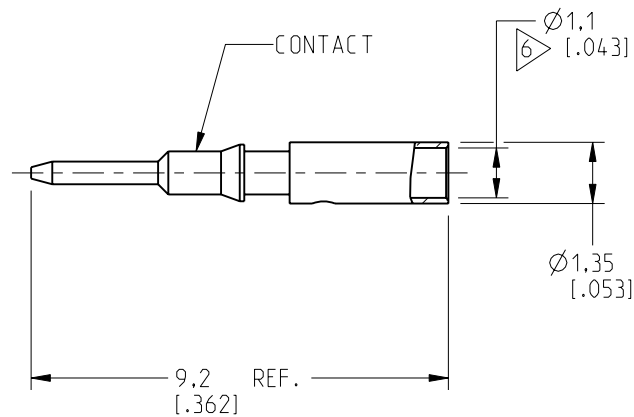


1. MATERIALS AND FINISHES:
HOUSING & FERRULE - BRASS, GOLD PLATING
BODY - BERYLLIUM COPPER, GOLD PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE, NATURAL

3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -55°C TO +155°C

5. CONTACT PIN TO SOLDER

6. SHOWS CABLE ENTRY DIMENSIONS.

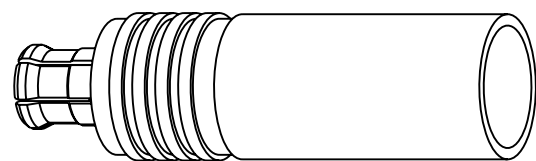

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE:

<0.5mm = ±0.05mm	[<0.020 = ±0.002]
0.5 - 6mm = ±0.1mm	[0.020 - 0.236 = ±0.004]
>6.00 - 30mm = ±0.2mm	[>0.236 - 1.181 = ±0.008]
>30.00 - 120mm = ±0.3mm	[>1.181 - 4.725 = ±0.012]

SEE NOTES

MCX CRIMP PLUG
(FOR RG-58C/U, 58/U CABLE)

SIZE	DRAWING NO.
	MC X1111A1-3GT30G-5811-50

ITEM NO.	081111A AF58GF5E
----------	------------------

REV

THIRD ANGLE PROJ.



REFERENCE

EAR#

 ANGLES = $\pm 1^\circ$

ENGR.1
SHARON.XIE

ENGR.2
M.ZHANG

DATE	13-Sep-24
------	-----------

SHEET NO. 2 OF 2

SCALE: 6.0:1.0

B

B