
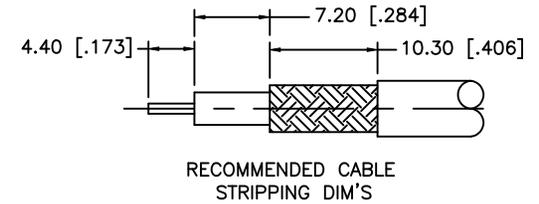

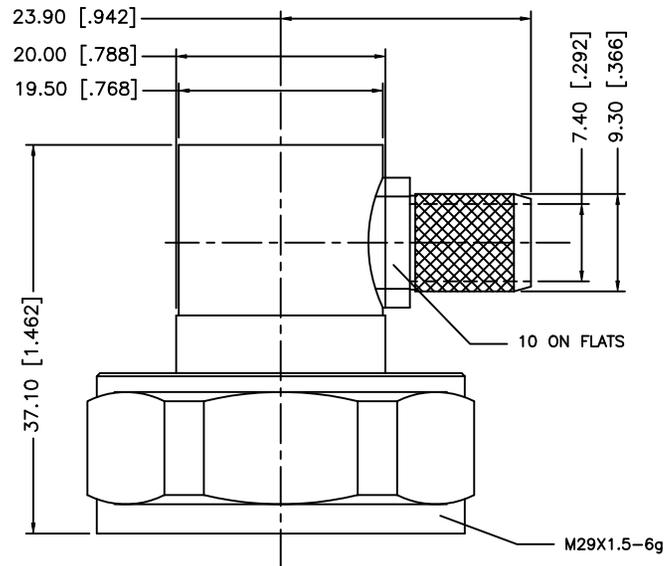


REV.	DATE	ECR NO.	DESCRIPTION
A	12/29/00	-	REVISE PLATING TO SILVER
B	07/30/06	-	REVISE PLATING TO NEXCOTE, UPDATE DRAWING FORMAT
C	07/27/08	-	REVISE MATING FACE TO 32 HEX NUT, FERRULE I.D.

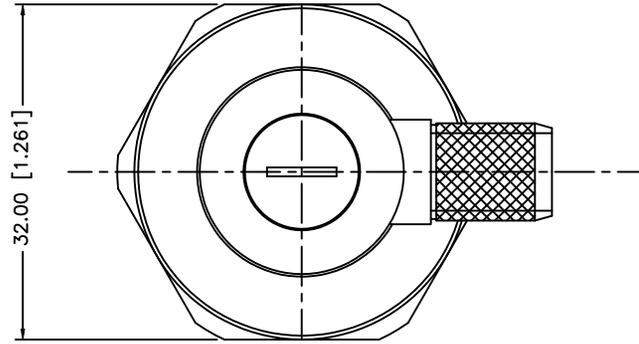

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER

DESCRIPTION	MATERIAL	FINISH	QTY
8			
7			
6	FERRULE	COPPER	NEXCOTE 1
5	COVER	BRASS	NEXCOTE 1
4	GASKET	SILICONE	BLACK 1
3	CONTACT PIN	BRASS	SILVER 1
2	INSULATOR	PTFE	NATURAL 1
1	BODY	BRASS	NEXCOTE 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	GRS	07/27/08
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/272/272114.DWG	

**Amphenol Connex**

PART DESCRIPTION  
**7/16 R/A CRIMP PLUG  
(FOR RG-214/U CABLE)**

PART NO.  
**272114**

DWG. NO.	272114.DWG	REV.	C	SIZE	A	SCALE	NA
----------	------------	------	---	------	---	-------	----