


7 JUL 1999 23:42

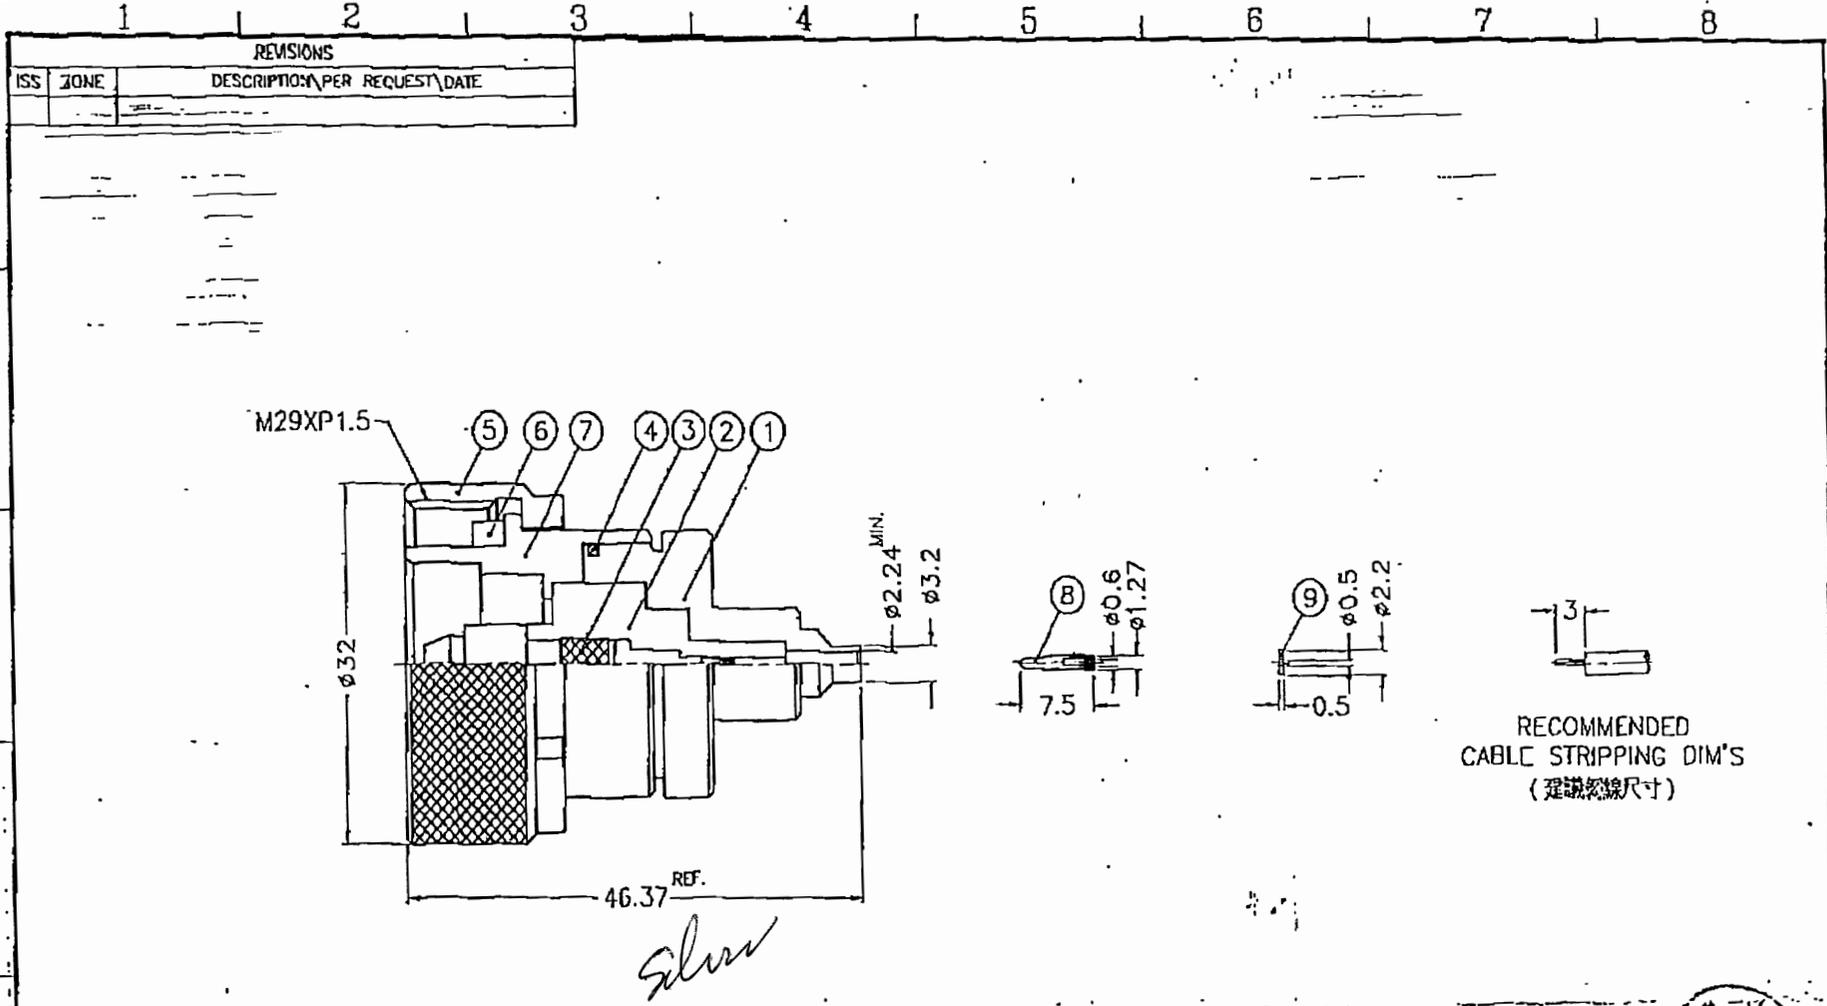

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

*Silver*

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-628
  2. SILVER PL. 120 MIN. THICK OVER COPPER STRIKE
  3. BERYLLIUM COPPER PER QQ-C-530
  4. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
  5. TEFLON MIL-P-19468

參考  
88.7.01  
開發部

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
9	INSULATOR	NOTE 5	NATURAL	1	SMA1181A1-5T-50
8	CONTACT PIN	NOTE 1	NOTE 4	1	SMA50B1-6-127/06
7	CONTACT BODY	NOTE 1	NOTE 2	1	7161181A1-7
6	GASKET	SILICONE	RED	1	GS-25/205X35
5	SHELL	NOTE 1	NOTE 2	1	7161141A1-7
4	GASKET	SILICONE	RED	1	GS-215/183XD16
3	CONTACT PIN	NOTE 3	NOTE 4	1	7161181A1-3-.141
2	INSULATOR	NOTE 5	NATURAL	1	7166581A1-2T-.085
1	BARREL	NOTE 1	NOTE 2	1	7161181A1-1-.085

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6 = ±0.2  
8-30 = ±0.4  
30-120 = ±0.6  
120-315 = ±1  
315-1000 = ±1.6  
1000-2000 = ±2.4

PART NO.	272163
APPROVED	<i>[Signature]</i> DATE 06-22-99
CHECKED	<i>[Signature]</i> DATE 06-22-99
DRAWN	KOLI DATE 06-22-99

TITLE	PLUG 7/16 SEMI-RIGID PLUG (FOR .085" SEMI-RIGID CABLE)
DRAWING NO.	272163 KJ-7161181A1-120STS-.085-50
FILE NO.	F:\DWG\716\1181A1\085\120STS

07/07/00 07.20

TY/DY NO. 200E

D 009

E NO. 357

P. 22/25

116