

NOTES:

1. MATERIALS AND FINISHES:

BODY - BRASS, NICKEL PLATING
 CONTACT - PHOSPHOR BRONZE, GOLD PLATING
 INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 75 OHM
 B. FREQUENCY RANGE: DC-6.0 GHz
 C. VSWR: 1.15 MAX. (DC-3.0 GHz)
 1.25 MAX. (3.0-6.0 GHz)
 D. D.W.V: 1500 VRMS, MIN.


3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65°C TO +165°C




THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	03-Mar-08	-----	MS
C	SYNC, FREQUENCY RANGE WAS: 0-3 GHz	16-Jul-15	50654	SH/BCG

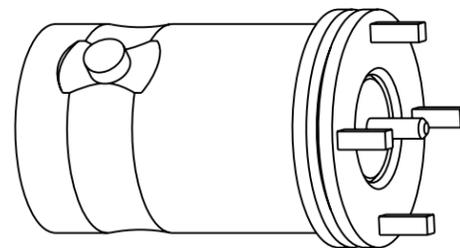

SCALE 3.000

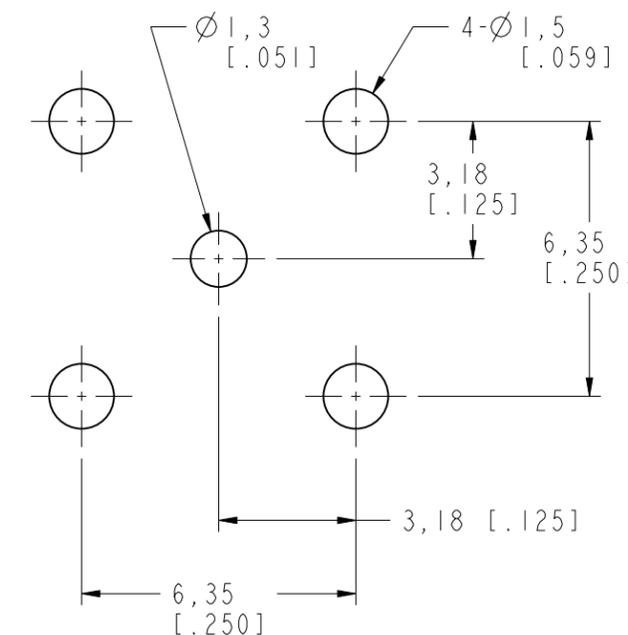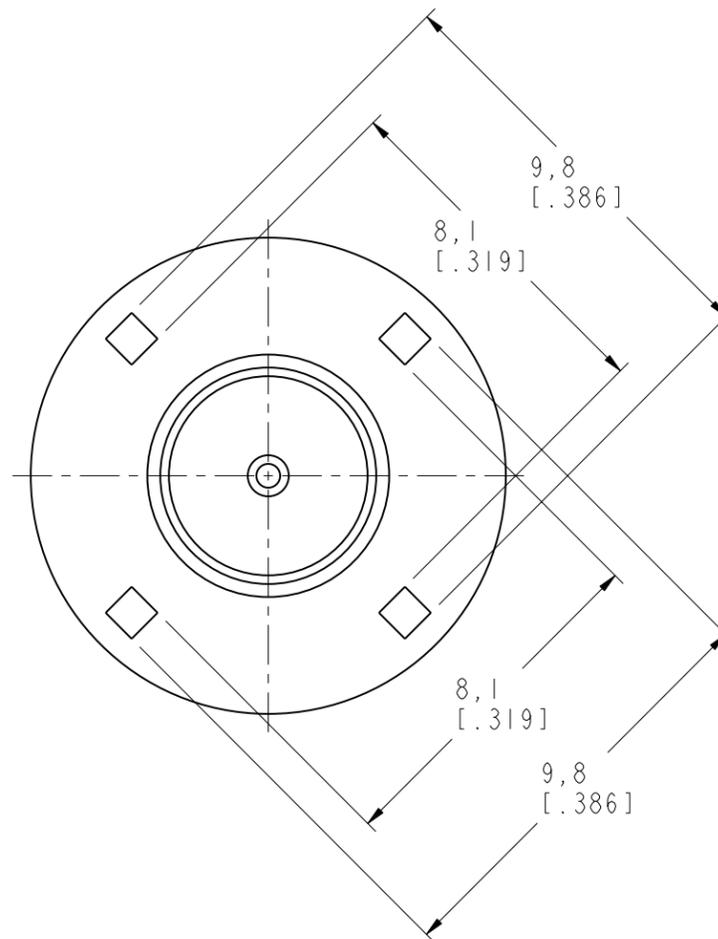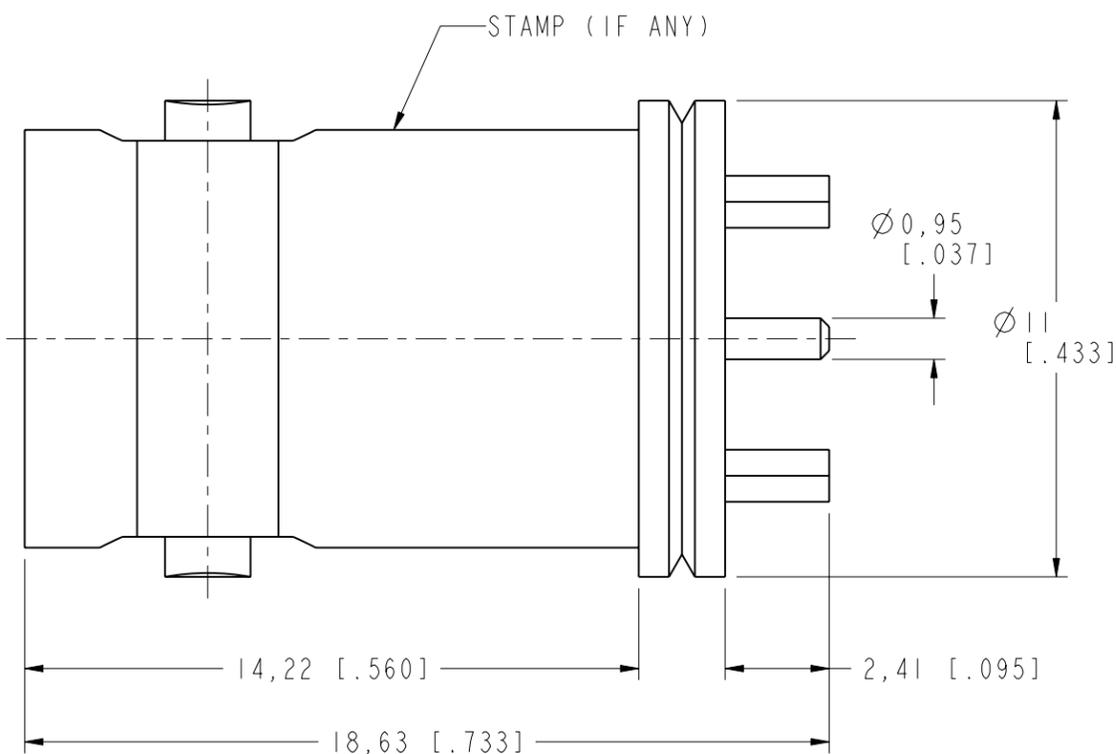

RECOMMENDED
PCB MOUNTING HOLE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: < 0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°	MATERIAL	DRAWN M. ZHANG	DATE 15-Jul-15	TITLE 75OHM BNC P.C. MOUNT RECEPT. JACK	Amphenol RF www.amphenolrf.com
	REFERENCE EAR# 6479 AND	ENGINEER C. WANG	DATE 03-Mar-08		
	CONFIGURATION LEVEL:	APPROVED S. HSIEH	DATE 15-Jul-15	SCALE: 6.0:1.0 SHEET 2 OF 2	ITEM NO. 016251ABD03NA7F
	FINISH	CAD FILE		DWG SIZE B REV C	PART NO. 112405-11