



SALES

10 Sep. 2002 18:25




REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED MOUNTING HOLE
(建議深設孔)

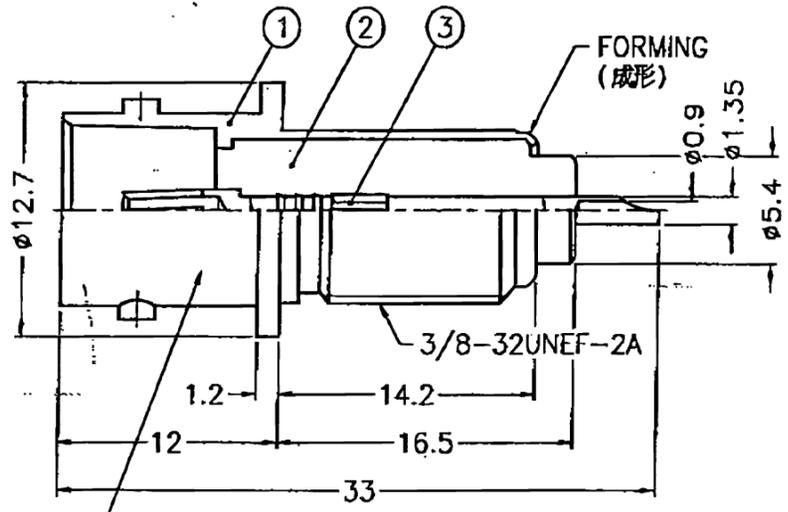

STAMP (IF ANY)
噴字 (若有要求)

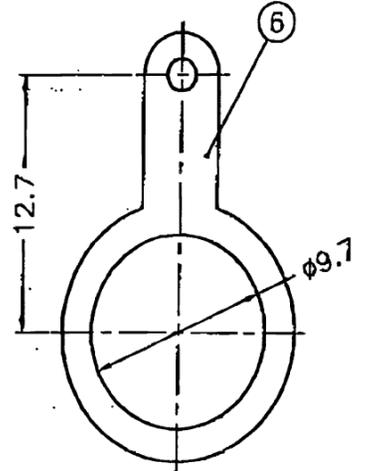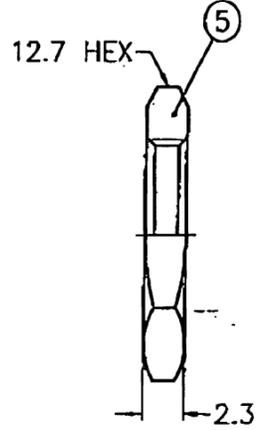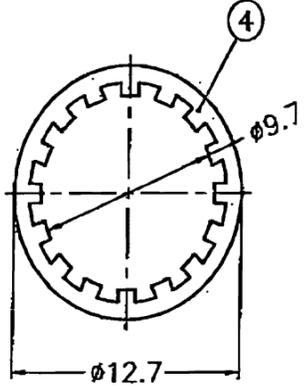

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-526
 - BRASS PER QQ-B-613
 - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - PHOSPHOR BRONZE PER QQ-B-750
 - TEFLON MIL-P-19468



1. MAX. PANEL THICKNESS=9mm

DIMENSIONS ARE IN MILLIMETERS						PART NO. 112429		TITLE	
6	SOLDER TAG	NOTE 2	NOTE 3	1	B7310-7	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4	APPROVED	DATE	BNC BULKHEAD RECEPT. JACK
5	HEX NUT	NOTE 1	NOTE 3	1	HN127-3/8-32 X23		<i>APK-C</i>	03-14-02'	DRAWING NO.
4	LOCK WASHER	NOTE 2	NOTE 3	1	LW-127/97X05		CHECKED	DATE	KJ-B6351B3-NT3G-75
3	CONTACT PIN	NOTE 5	NOTE 4	1	B7312-3-75		<i>Karl-Y</i>	03-14-02'	ITEM NO.
2	INSULATOR	NOTE 6	NATURAL	1	B7312-2T-75		DRAWN	DATE	016351AAL01NA7F
1	BODY	NOTE 1	NOTE 3	1	B7312-1		<i>Karl-Y</i>	03-14-02'	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE 2.5/1	ISSUE	A	FILE NO. F:\DWG\B\6351B3\75\NT3G

AMPHENOL CONNEX

RD-DR 1/005 8