
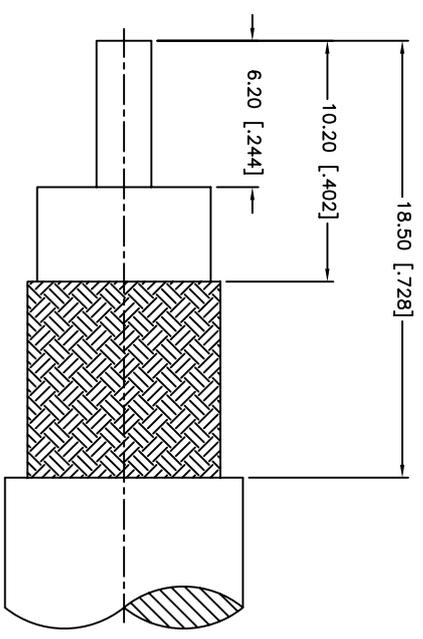
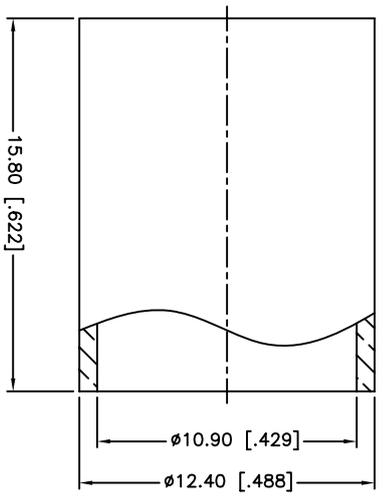
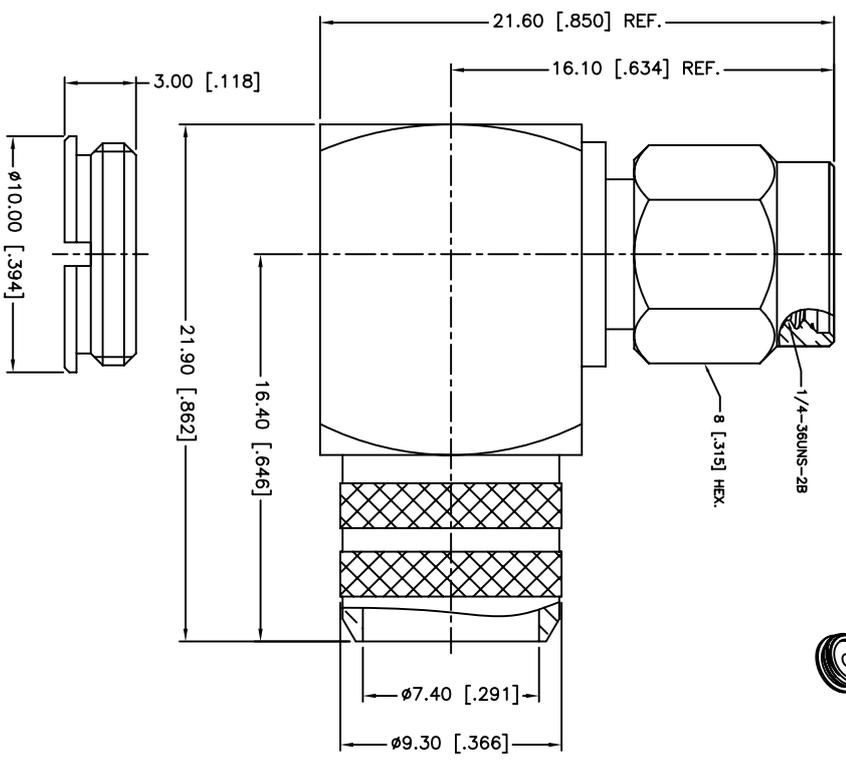


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/12/07	-	INITIAL RELEASE
A	06/20/12	-	ADD NOTES

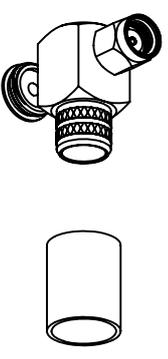

RECOMMENDED  
CABLE STRIPPING DIM'S

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-6 GHz
3. VSWR(RETURN LOSS): 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C
7. CRIMPED FERRULE  
HEX. CRIMP SIZE .429"  
CONTACT PIN TO SOLDER

# Amphenol Connex

**Amphenol Connex**  
SMA REVERSE POLARITY R/A CRIMP PLUG  
(FOR BELDEN 9913, 9914, TIMES LMR-400 CABLE)

DESCRIPTION	MATERIAL	FINISH	QTY
COVER	BRASS	GOLD	1
FERRULE	BRASS	GOLD	1
GASKET	SILICON RUBBER	RED	1
RETAINER RING	SUS 304	NATURAL	1
CONTACT PIN	BERYLLIUM COPPER	GOLD	1
INSULATOR	PIFE	NATURAL	1
HOUSING WITH BODY	BRASS	GOLD	1
SHELL	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.  
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm  
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
M.ZHANG	06/20/12

CAD FILE: C:/CONNEX/132299RP.DWG

PART DESCRIPTION	PART NO.
SMA REVERSE POLARITY R/A CRIMP PLUG (FOR BELDEN 9913, 9914, TIMES LMR-400 CABLE)	132299RP

DWG. NO. 132299RP.DWG

REV.	SIZE	SCALE
A	A	NA