

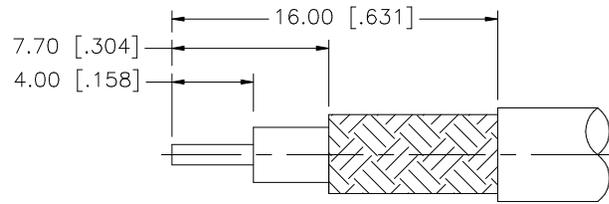
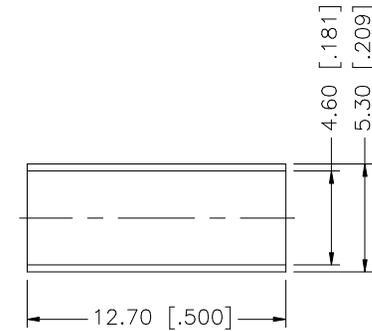


REV.	DATE	DESCRIPTION
NC	11/07/06	INITIAL RELEASE

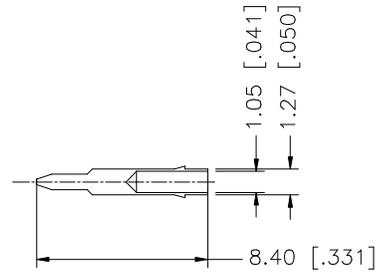

RECOMMENDED CABLE STRIPPING DIM'S

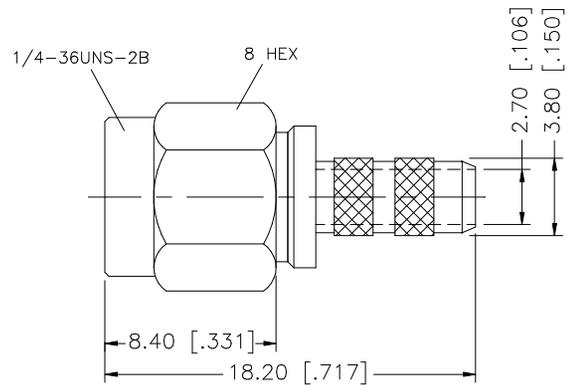

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER.

8				<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  0.5 - 8mm ± 0.20mm  8 - 30mm ± 0.40mm  30 - 120mm ± 0.50mm</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  .020 - .315 = ± 0.007"  .315 - 1.180 = ± 0.015"  1.180 - 4.724 = ± 0.020"</p>	APPROVALS	DATE	<h1 style="text-align: center; color: blue;">Amphenol Connex</h1>					
7					DRAWN	G.R.S.					11/07/06	<p style="text-align: center;">PART DESCRIPTION</p> <p style="text-align: center;"><b>SMA CRIMP PLUG</b> (FOR GORE GSC-03-81748-00 CABLE)</p>
6					CHECKED			<p style="text-align: center;">PART NO.</p> <p style="text-align: center;"><b>132374</b></p>				
5					ISSUED							<p style="text-align: center;">DWG. NO.</p> <p style="text-align: center;">132374.DWG</p>
4	FERRULE	COPPER	GOLD		1	SHEET	1 OF 1	REV.	NC	SIZE	A	
3	CONTACT PIN	BRASS	GOLD	1	CAD FILE		C:/132/132374.DWG					
2	INSULATOR	TEFLON	NATURAL	1	DO NOT SCALE DRAWING							
1	BODY	BRASS	GOLD	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								