
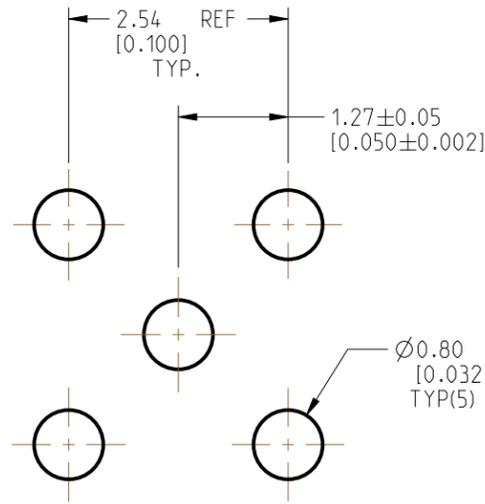
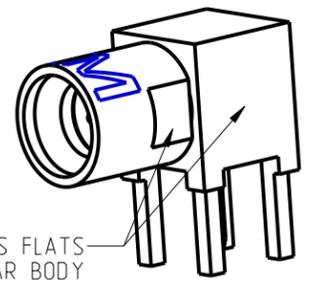


NOTES:

1. MATERIALS AND FINISHES:
 BODY, REAR BODY & CONTACT - BeCu, GOLD PLATING
 INSULATOR & INSULATOR DISC - PTFE, NATURAL
2. ELECTRICAL:
 A. IMPEDANCE : 50 OHM
 B. FREQUENCY RANGE : DC - 26.5 GHz
 C. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. MECHANICAL:
 A. DURABILITY : 100 CYCLES MIN.
 B. TEMPERATURE RANGE : -65° C TO +165° C
4. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: PACKING TO BE MARKED
 "AMPHENOL RF, 925-NM140J-51P AND DATE CODE"

REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
A	RELEASE TO MFG.	15-DEC-25	17685	SH

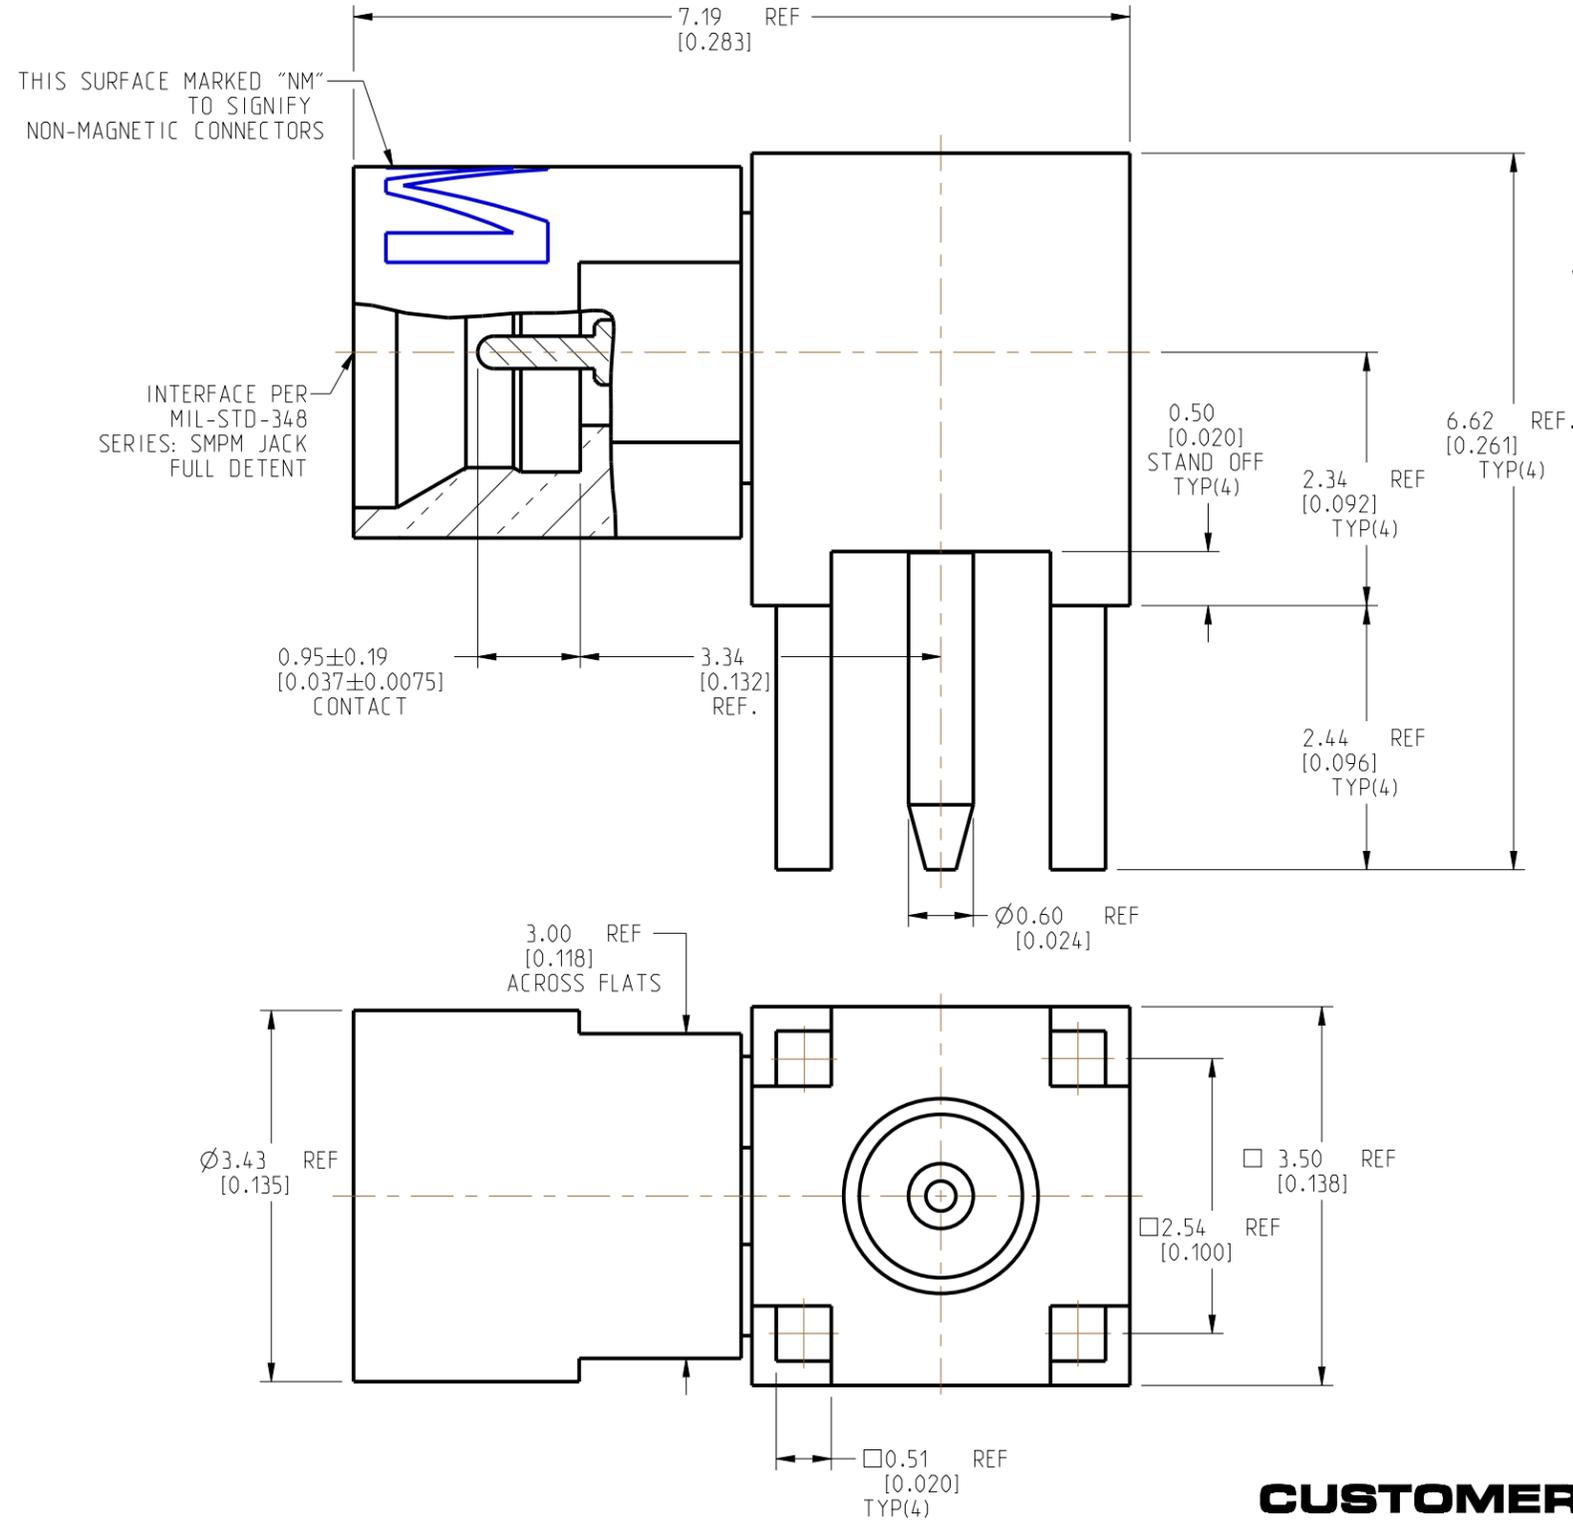

RECOMMENDED PCB MOUNTING HOLE DIMENSIONS

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

THIRD ANGLE PROJ.

REFERENCE 925-140J-51P EAR# 13020

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE:

<0.5mm = ±0.05mm	[<0.020 = ±0.002]
0.5 - 6mm = ±0.1mm	[0.020 - 0.236 = ±0.004]
>6.00 - 30mm = ±0.2mm	[0.236 - 1.181 = ±0.008]
>30.00 - 120mm = ±0.3mm	[1.181 - 4.725 = ±0.012]

ANGLES = ±1°

MATERIAL SEE NOTES

ENGR.1 PONNARASAN ENGR.2 M.ZHANG DATE 19-AUG-25

TITLE SMPM RA JACK FULL DETENT PCB NON-MAGNETIC THROUGH HOLE 4 LEGS RECEPTACLE

SHEET NO. 2 OF 2 SCALE: 15.0:1.0

Amphenol RF

SIZE B	DRAWING NO. 925-NM140J-51P	REV A
	ITEM NO. 925-NM140J-51P	
	PART NO. 925-NM140J-51P	