
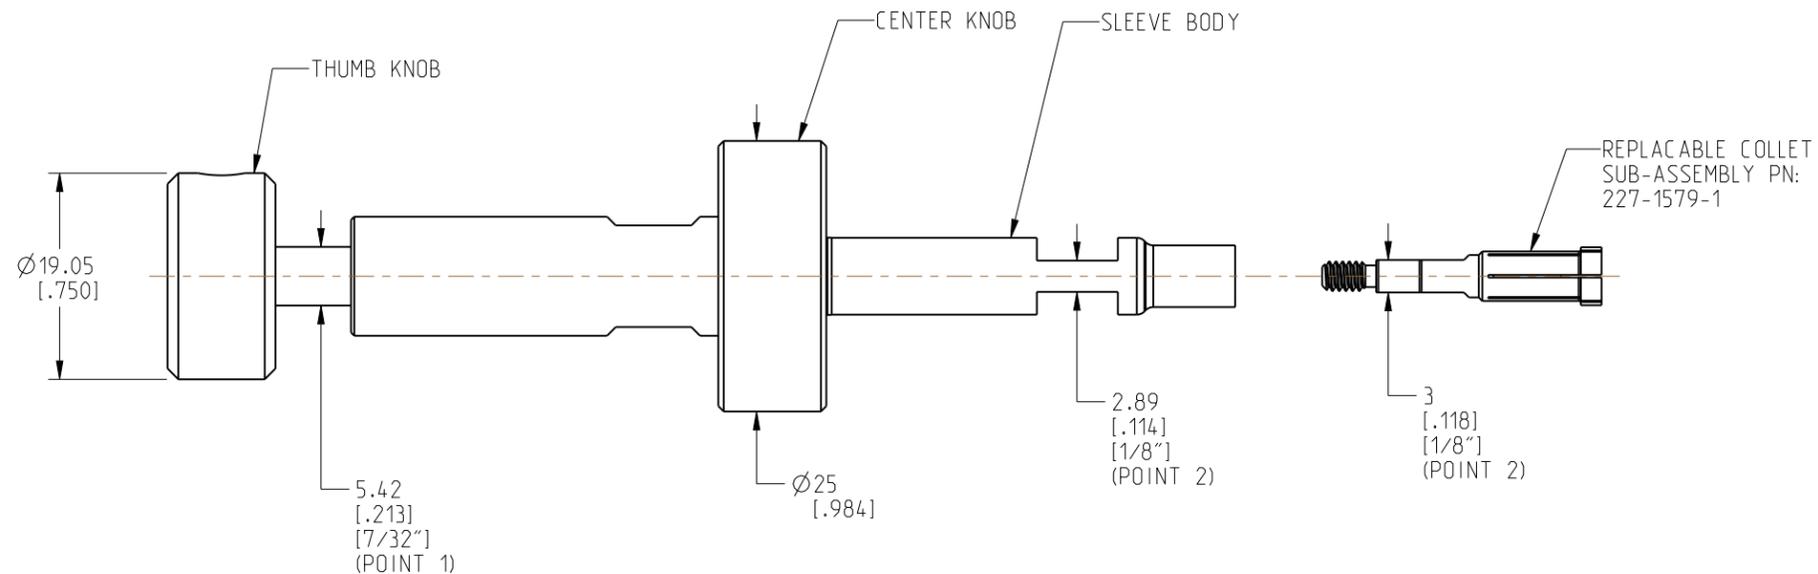




NOTES:

- MATERIALS AND FINISHES:
 SLOTTED BODY - BeCu, NICKEL PLATED (.0000025 m [.000100 in] MIN THICK)
 BODIES - BRASS, NICKEL PLATED (.0000025 m [.000100 in] MIN THICK)
 KNOBS - DELRIN, BLACK
- COMPATIBLE WITH BOTH STAMPED AND MACHINED VERSIONS OF THE HD-EFI BULLET
- PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 227-1579, AND DATE CODE"
- TO EXTRACT BULLET FROM HD-EFI PLUG ASSEMBLY:
 A. DEPRESS THUMB KNOB UNTIL BOTTOMED COMPLETELY,
 RESULTING IN FULLY OPEN COLLET.
 B. INSERT HD-EFI BULLET INTO COLLET UNTIL BOTTOMED
 C. RELIEVE PRESSURE FROM THUMB KNOB AND PULL ON CENTER KNOB
- TO INSERT BULLET INTO HD-EFI PLUG ASSEMBLY:
 A. DEPRESS THUMB KNOB UNTIL BOTTOMED COMPLETELY,
 RESULTING IN FULLY OPEN COLLET.
 B. INSERT HD-EFI BULLET INTO SLOTTED COLLET UNTIL BOTTOMED
 C. RELIEVE PRESSURE FROM THUMB KNOB AND INSERT BULLET INTO
 HD-EFI PLUG ASSEMBLY.
 D. DEPRESS THUMB KNOB UNTIL BOTTOMED COMPLETELY TO RELEASE
 HD-EFI BULLET FROM TOOL
- TO REPLACE COLLET SUB-ASSEMBLY:
 A. ALIGN FLATS ON COLLET SUB-ASSEMBLY WITH FLATS ON SLEEVE BODY
 AT POINT 2
 B. LOOSEN COLLET SUB-ASSEMBLY WITH 7/32" WRENCH AT POINT 1
 AND 1/8" WRENCH AT POINT 2
 C. TIGHTEN NEW COLLET SUB-ASSEMBLY TO 7 TO 10 IN-LBS WITH
 7/32" WRENCH AT POINT 1 AND 1/8" WRENCH AT POINT 2

REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
A	RELEASE TO MFG.	04-MAR-26	17820	LQ

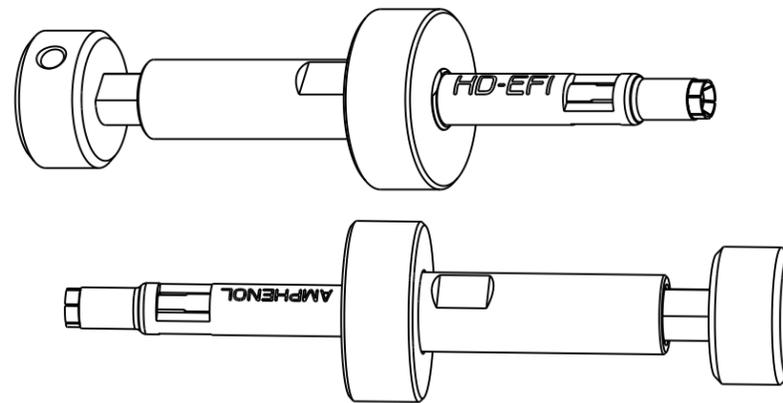

MARKINGS AS SHOWN

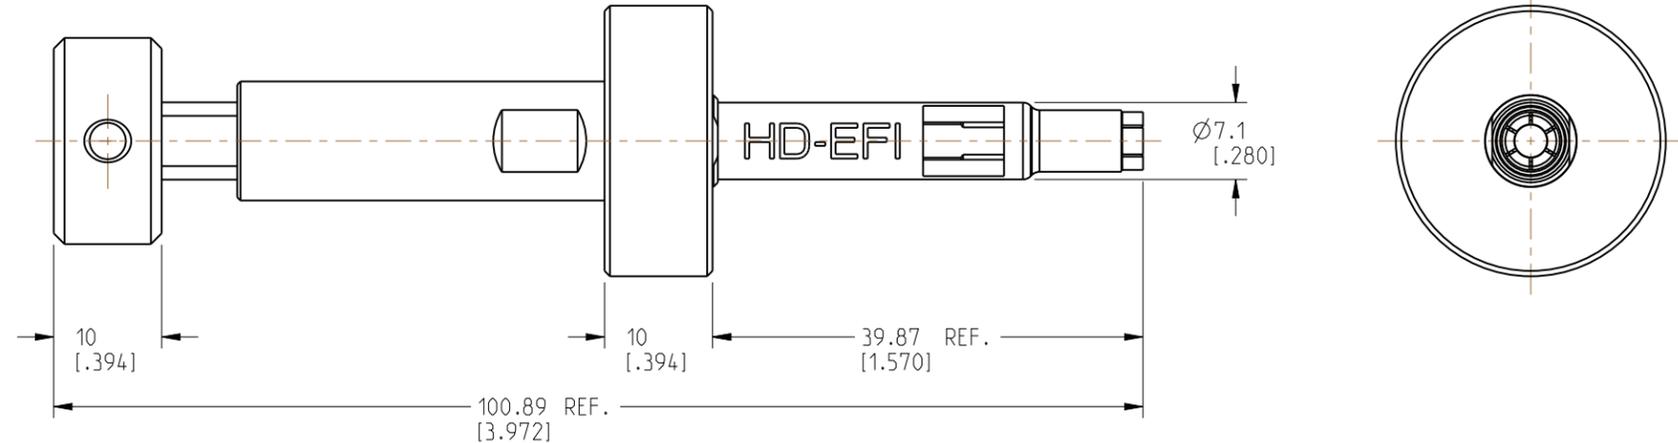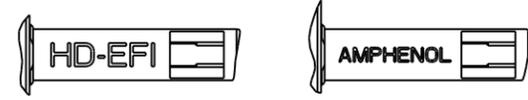

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE: <0.5mm = ±0.05mm [$<0.020 = \pm 0.002$] 0.5 - 6mm = ±0.1mm [$>0.020 - 0.236 = \pm 0.004$] >6.00 - 30mm = ±0.2mm [$>0.236 - 1.181 = \pm 0.008$] >30.00 - 120mm = ±0.3mm [$>1.181 - 4.725 = \pm 0.012$] ANGLES = ±1°			MATERIAL SEE NOTES			TITLE HD-EFI BULLET INSERTION AND EXTRACTION TOOL			Amphenol RF																							
THIRD ANGLE PROJ.			REFERENCE 227-1543			ENGR.# 12641			ENGR.1 C. VIGORITO			ENGR.2 M.ZHANG			DATE 03-Mar-26			SHEET NO. 2 OF 2			SCALE: 1.5:1.0			DRAWING NO. 227-1579			ITEM NO. 227-1579			PART NO. 227-1579			REV A		