
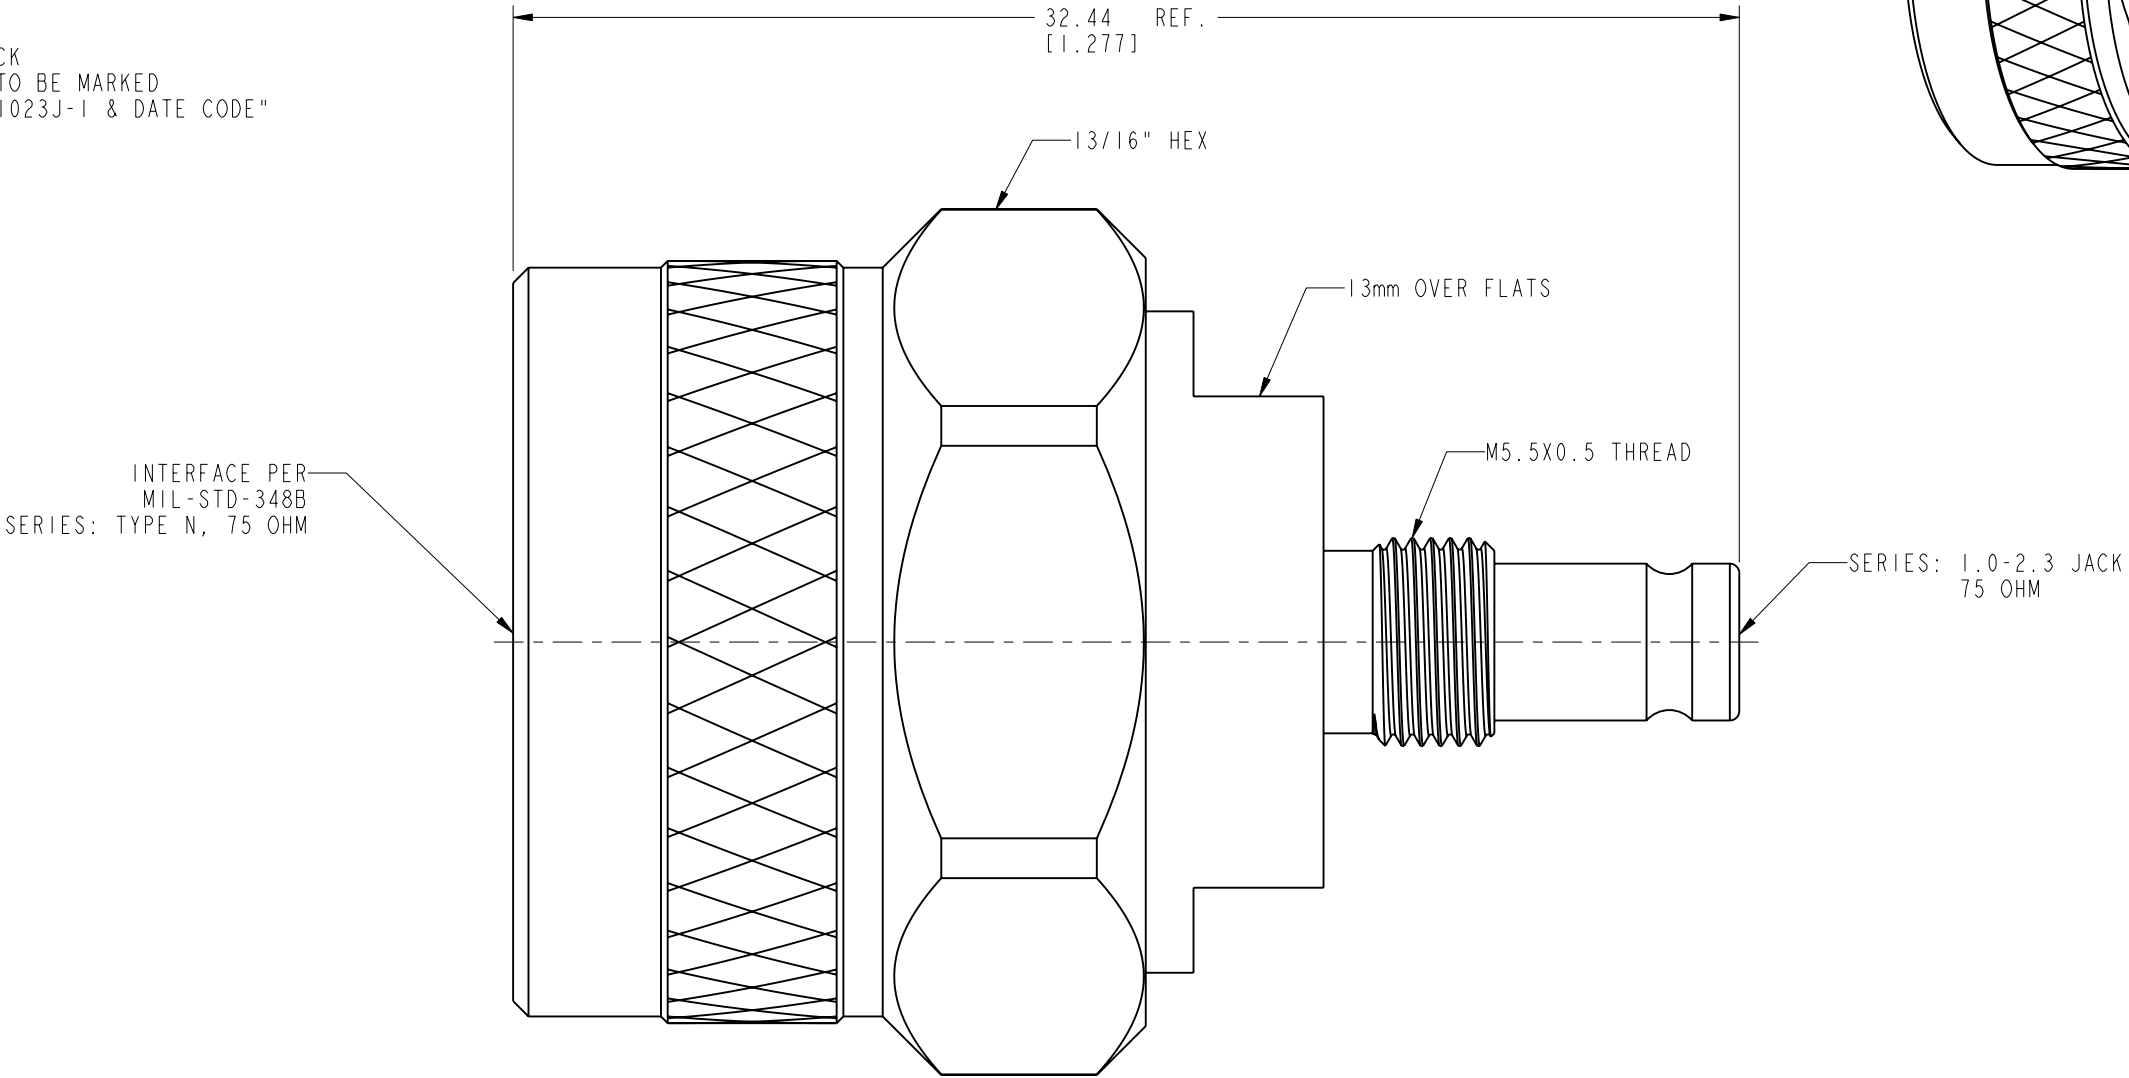


NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE, NATURAL
COUPLING NUT - BRASS, NICKEL PLATING
RETAINING RING - STAINLESS STEEL, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC-12 GHz
C. VSWR(RETURN LOSS):-20 dB DC-2 GHz MAX.
-15 dB 2-6 GHz MAX.
D. DIELECTRIC WITHSTANDING VOLTAGE: 250 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -40° C TO 155° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: PACKAGING TO BE MARKED
"AMPHENOL RF, AD-NP1023J-1 & DATE CODE"

THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MANUFACTURING	18-Nov-19	13462	CJV

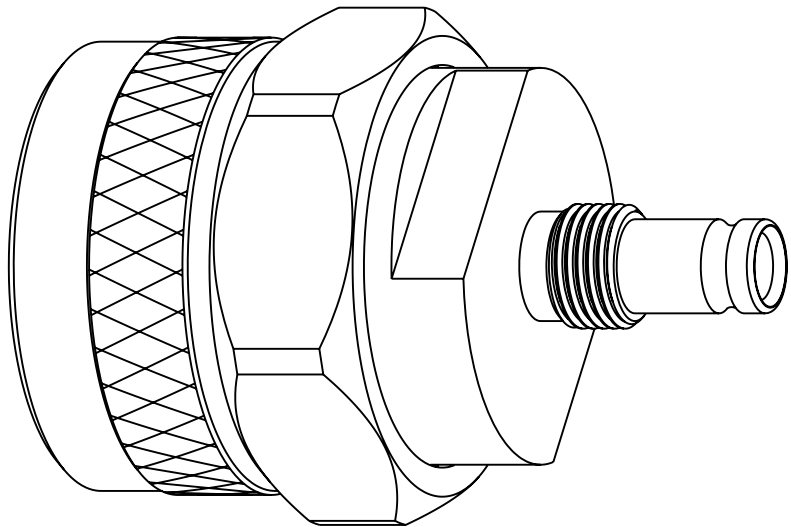

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF www.amphenolrf.com	
	SEE NOTES	M. ZHANG	18-Nov-19				
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	C. VIGORITO	DATE	N PLUG TO 1.0-2.3 JACK 75 OHM		DRAWING NO. AD-NP1023J-1	
	EAR# 8729		03-Apr-19			ITEM NO. AD-NP1023J-1	
	REF: ---	APPROVED	DATE	SCALE: 5.0:1.0		SHEET 2 OF 2	
	CONFIGURATION LEVEL: In Work	S. HSIEH	20-Nov-19	DWG SIZE		REV	
	FINISH	CAD FILE		B		A	
						PART NO. AD-NP1023J-1	