


NOTES:

1. FINISH: (PLATING THICKNESS IN MICRO-INCHES)  
NICKEL PL. 100 MIN. THICK
2. SLEEVE CAN BE BROKEN OFF FROM CARRIER BY 1 CYCLE OF 60° UPWARD BENDING AND 60° DOWNWARD BENDING  
IN THE DIRECTION OF INSTRUCTION.
3. SLEEVE TO BE SUPPLIED  
ON REELS (2,500 PCS./ REEL)
4. SLEEVE TO WOUND ON REEL IN DIRECTION AND POSITION SHOWN.

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	23-Nov-20	15436	SH
B	SYNC WITH NA	09-DEC-20	15447	KCE

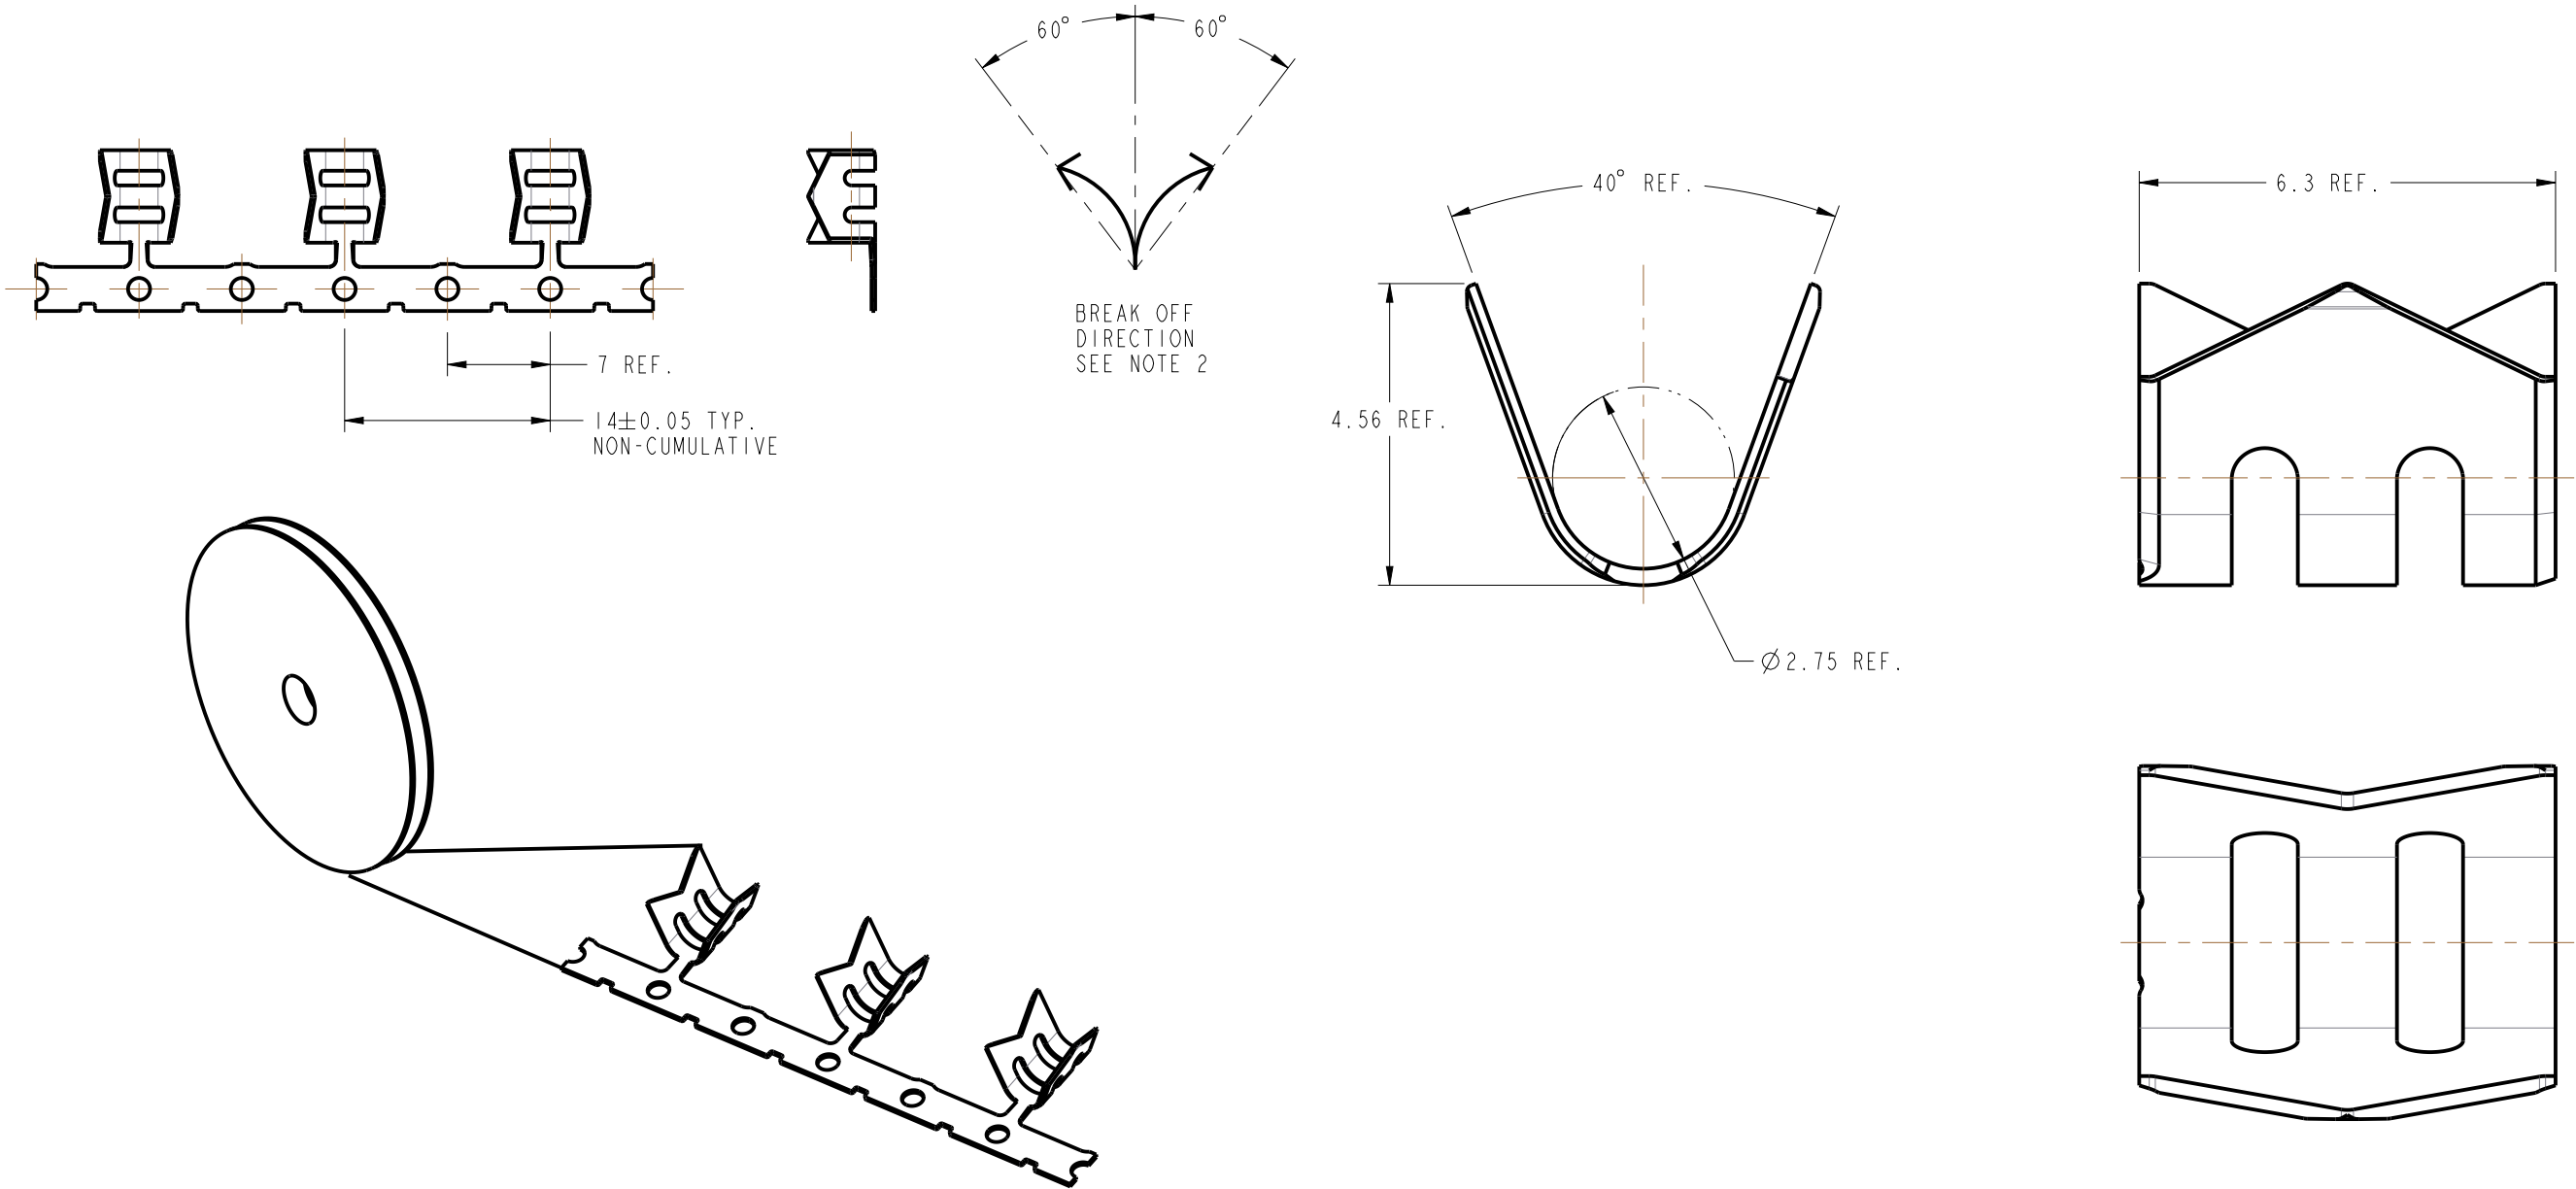

**CONFIGURATION CONTROL:**  
**NO CHANGES PERMITTED TO DRAWING WITHOUT**  
**PPAP QUALIFIED CUSTOMER APPROVAL**

**CUSTOMER OUTLINE DRAWING**  
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC [INCHES] AND TOLERANCES ARE: <0.5mm = ±0.05mm      [ $<0.020 = \pm0.002$ ] >0.5 - 6mm = ±0.1mm    [ $>0.020 - 0.236 = \pm0.004$ ] >6.00 - 30mm = ±0.2mm   [ $>0.236 - 1.181 = \pm0.008$ ] >30.00 - 120mm = ±0.3mm [ $>1.181 - 4.725 = \pm0.012$ ]			MATERIAL COPPER NICKEL ALLOY		TITLE SLEEVE		Amphenol RF												
THIRD ANGLE PROJ.			REFERENCE		EAR#		ENGINEER		DATE		SHEET NO. 3 OF 3		SCALE: 4.0:1.0		SIZE		DRAWING NO.		REV			
					7949		TANGOR.DENG		20-Nov-20						B		SL99ABF01					
																	SL99ABF01A					
																	PART NO.		923-10829		B	